

Tiefste CCT

Brand	Harlowe Avant Max
Lux	2455.14
CCT	2765.00
DUV	0.0058
CRI	97.20
CRI (Full)	96.27
TM-30 R _f	92.00
TM-30 R _g	96.00

3200k

Lux	2682.88
CCT	3234.00
DUV	0.0016
CRI	96.80
CRI (Full)	95.80
TM-30 R _f	96.00
TM-30 R _g	102.00
SSI	84.00

5500K

Lux	3072.48
CCT	5894.00
DUV	0.0044
CRI	98.20
CRI (Full)	96.80
TM-30 R _f	96.00
TM-30 R _g	102.00
SSI	74.00

6500K

Lux	3035.75
CCT	6858.00
DUV	0.0073
CRI	97.60
CRI (Full)	95.80
TM-30 R _f	95.00
TM-30 R _g	100.00

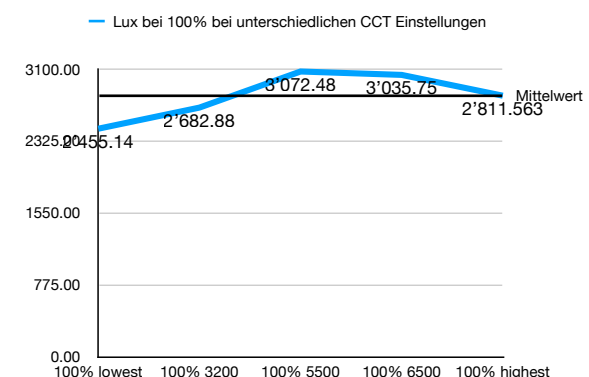
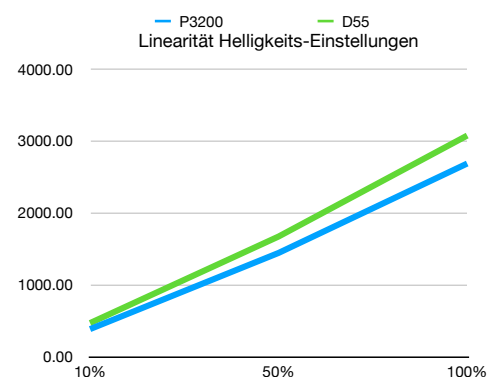
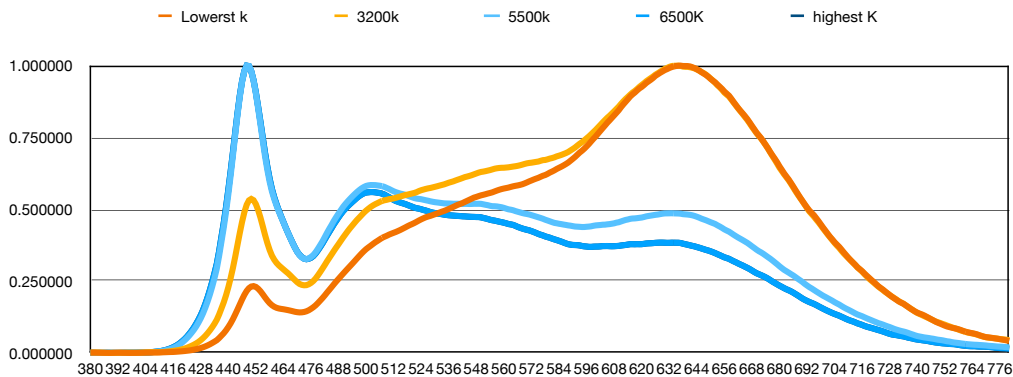
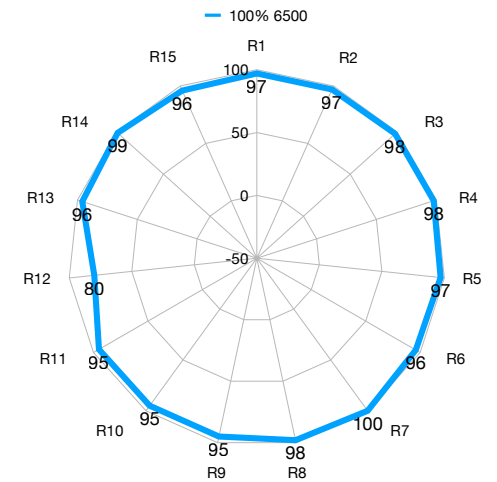
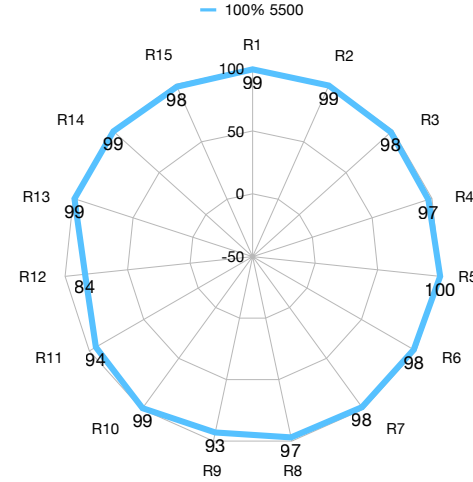
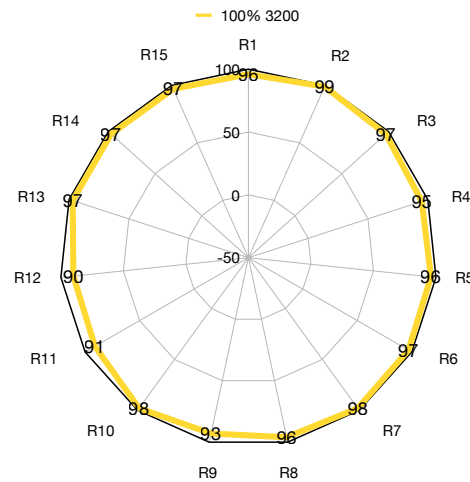
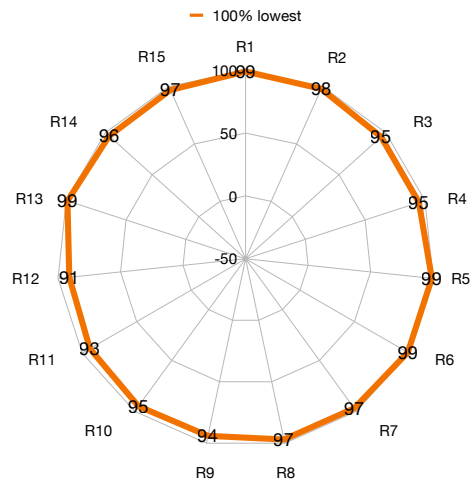


Tabelle 1

Farbtemperatur Eingestellt	Farbtemperatur gemessen	MK-1	Duv	CRI Ra	R9	CRI Re	TM30 R _f	TM30 R _g	SSI	LUX ohne Reflektor 100%	LUX 10% Leistung	LUX mit Reflektor	LUX eigentlicher % Wert bei 10% Leistung	LUX standardabweichung bei verschiedenen CCT
P3200	3234.00	3.29	0.0016	96.80	93.00	95.80	95.00	101.00	84.00	2682.88	377.66		14.08%	215.12
D55	5894.00	12.15	0.0044	98.20	93.00	96.80	96.00	102.00	74.00	3072.48	461.33	10595.16	15.01%	
D65	6858.00	8.03	0.0073	97.60	95.00	95.80	95.00	100.00		3035.75				