
Key values at maximum brightness

For each target CCT and RGB hue the highest available brightness level is shown. EV = log2(2 x lux / 5).
Duv, CRI/R9, SSI, TM-30 and TLCI are not reported for saturated RGB colours, where they are not meaningful. TLCI is for information only.

Type	Target CCT / hue	Level	Lux	EV	Measured CCT / hue	Duv	CRI Ra	R9	SSI	TM-30 Rf	TM-30 Rg	TLCI	Source
White	2700 K	100%	2455	9.94	2765 K	0.00580	97.2	94.0	87.0	92.0	96.0	96	Harlowe Avant Max 100% lowest
White	3200 K	100%	2683	10.07	3234 K	0.00164	96.8	93.0	84.0	95.0	101.0	99	Harlowe Avant Max 100% 3200
White	5500 K	100%	3072	10.26	5894 K	0.00443	98.2	93.0	73.0	96.0	102.0	99	Harlowe Avant Max 100% 5500
White	6500 K	100%	3036	10.25	6858 K	0.00732	97.6	95.0	70.0	95.0	100.0	99	Harlowe Avant Max 100% 6500

White light output at 100 % across all CCTs

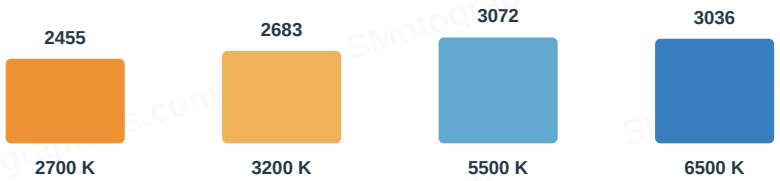

RGB output at 100 % across all colours

No values

Output with all reflectors

Reflector	Target CCT	Level	Lux	EV	Measured CCT	Duv	CRI Ra	R9	Source
Standard reflector	-	100%	10595	12.05	5687 K	0.00419	98.3	93.0	Harlowe Avant Max 100% max with reflector

© Marvin Kuhn | SMotographers.com

Harlowe Avant Max


LED Lab Report | Numbers-Import

TOTAL	COLOUR	POWER	USABILITY
75.5	79.0	79.2	68.2


Luminaire	Value	Test	Value
LED type	Bi-Color	Power	80.0 W
Test date	2026-07-29	Distance	-
Modifier	Verschiedene Setups aus dem Numbers-Rechner	Mode	Linear (current)
RGB in total	Yes	Measurements	10

Target CCT	Max Lux	Measured CCT	Duv	Ra	SSI	Rf	Rg	TLCI
2700 K	2455	2765	0.00580	97.2	87.0	92.0	96.0	96
3200 K	2683	3234	0.00164	96.8	84.0	95.0	101.0	99
5500 K	3072	5894	0.00443	98.2	73.0	96.0	102.0	99
6500 K	3036	6858	0.00732	97.6	70.0	95.0	100.0	99

Output across CCTs and levels

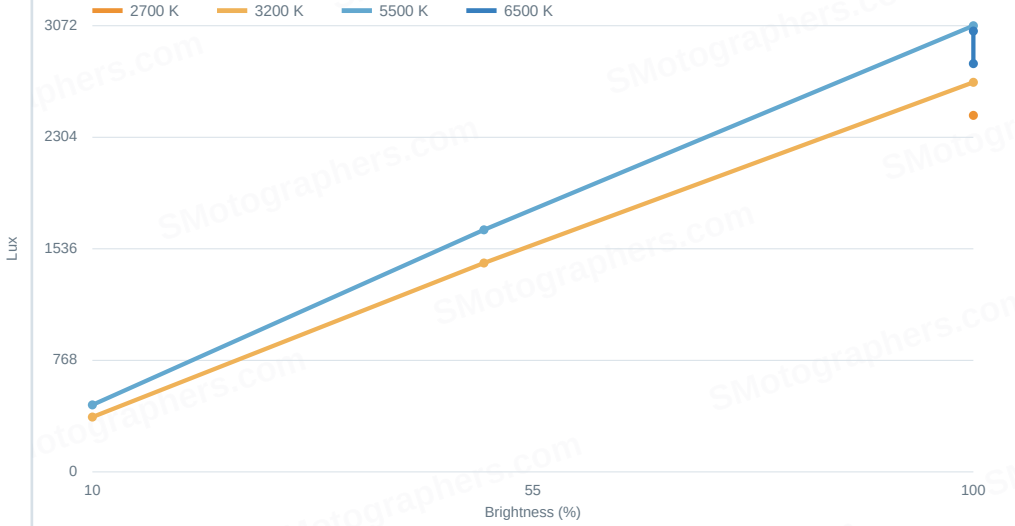

Spectrum at maximum brightness

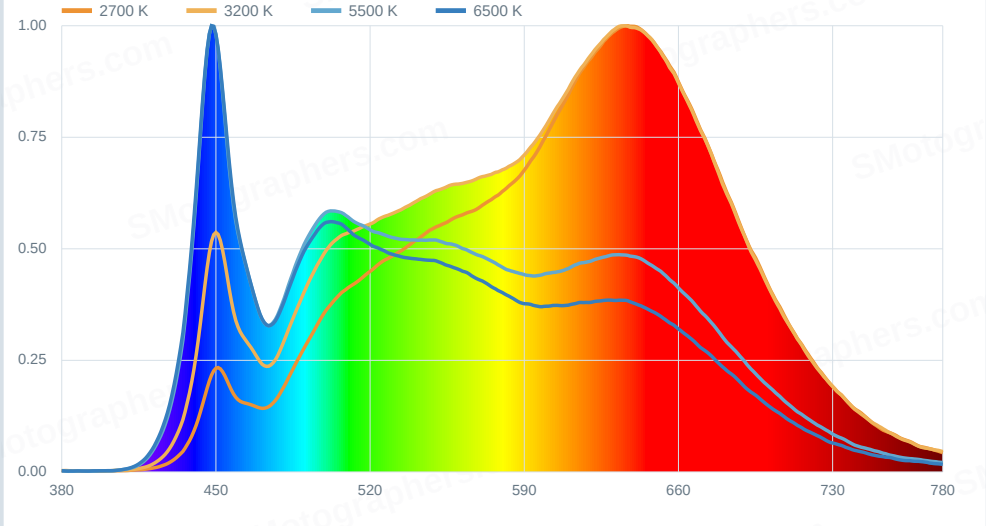

© Marvin Kuhn | SMotographers.com

Harlowe Avant Max

White light detail | Target CCT 2700 K

Level	Lux	Measured CCT	Duv	SDCM	Ra	R9	Peak
100%	2455	2765 K	0.00580	3.58	97.2	94.0	637 nm


Colour metric	Value
SSI	87
TM-30 Rf	92
TM-30 Rg	96
TLCI (Info)	96
Measurements	1

Check	Value
Brightest level	100%
CCT deviation	65 K
Mired deviation	8.71
Source	Harlowe Avant Max 100% lowest


Output linearity



CRI R1-R15 at brightest level



Spectra of all brightness levels

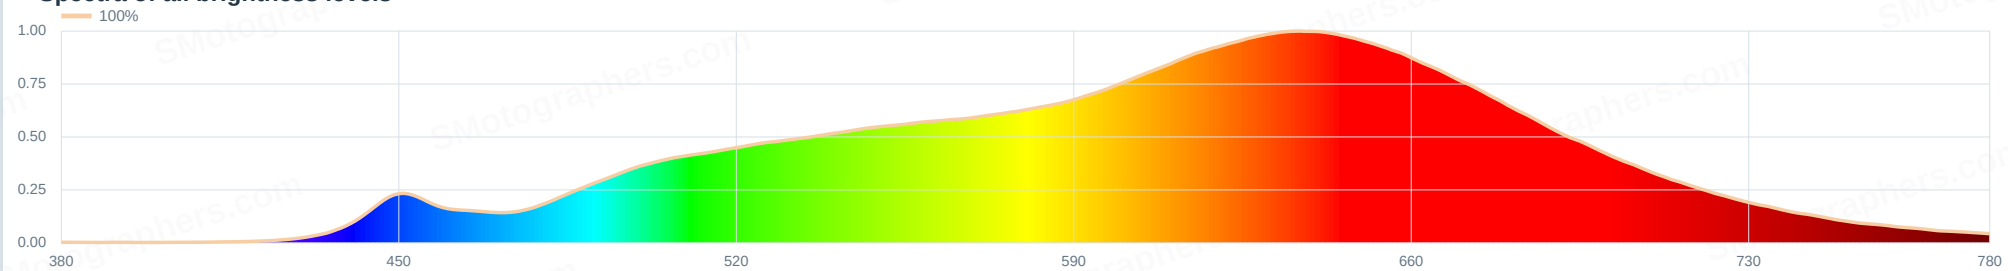

© Marvin Kuhn | SMotographers.com


Harlowe Avant Max

ANSI/IES TM-30 colour rendition | Target CCT 2700 K

LED EVALUATOR


TM-30 RF	TM-30 RG	SSI [P2767]	CCT (TM-30)	DUV	TLCI (INFO)	MEASUREMENT
92	96	87	2766 K	0.0058	96	100 %

Color Vector Graphic

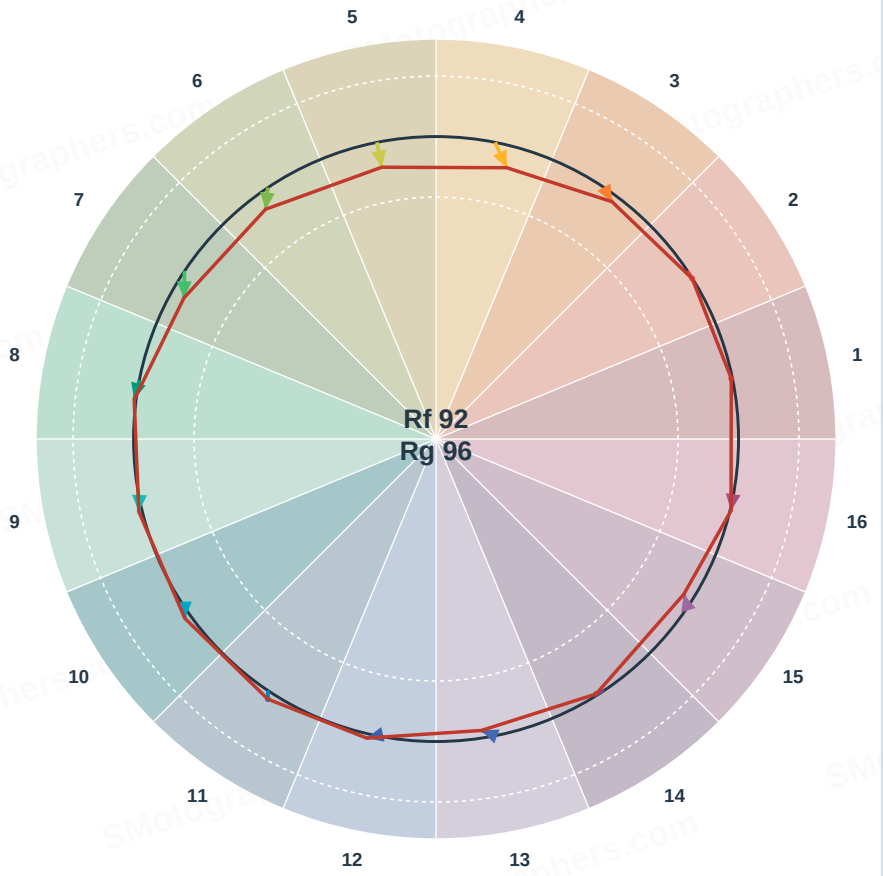


Circle = reference, arrows = shift of the test source per hue bin (CAM02-UCS).


Local chroma shift Rcs,hj

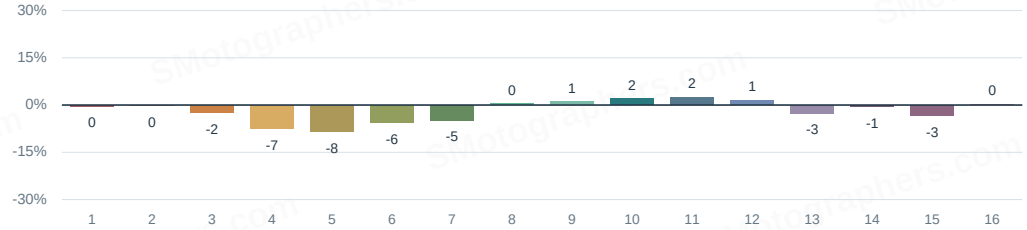

Local hue shift Rhs,hj

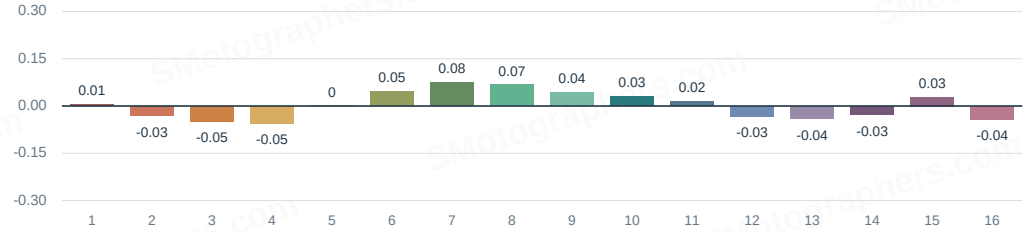

Local colour fidelity Rf,hj

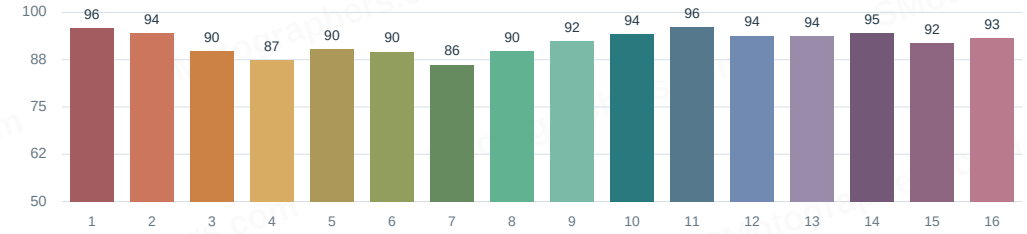

© Marvin Kuhn | SMotographers.com

Harlowe Avant Max

TM-30 colour swatches: reference vs. measurement | Target CCT 2700 K

LED EVALUATOR

TM-30 RF	TM-30 RG	SSI [P2767]	CCT (TM-30)	DUV	TLCI (INFO)	MEASUREMENT
92	96	87	2766 K	0.0058	96	100 %

Hue bins 1-16: average per bin



1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
-0 % Chroma	-0 % Chroma	-2 % Chroma	-7 % Chroma	-8 % Chroma	-6 % Chroma	-5 % Chroma	+0 % Chroma	+1 % Chroma	+2 % Chroma	+2 % Chroma	+1 % Chroma	-3 % Chroma	-1 % Chroma	-3 % Chroma	+0 % Chroma

Colour samples CES 1-99 (left reference, right measurement; sorted by hue bin)

CES 1 Rf 98	CES 2 Rf 97	CES 3 Rf 92	CES 4 Rf 95	CES 5 Rf 94	CES 6 Rf 96	CES 7 Rf 99	CES 8 Rf 97	CES 9 Rf 97	CES 98 Rf 96	CES 99 Rf 94
CES 10 Rf 95	CES 11 Rf 95	CES 12 Rf 94	CES 13 Rf 95	CES 14 Rf 98	CES 15 Rf 92	CES 16 Rf 93	CES 17 Rf 93	CES 18 Rf 92	CES 19 Rf 91	CES 20 Rf 86
CES 21 Rf 90	CES 22 Rf 87	CES 23 Rf 94	CES 24 Rf 92	CES 25 Rf 89	CES 26 Rf 88	CES 27 Rf 86	CES 28 Rf 95	CES 29 Rf 83	CES 30 Rf 83	CES 31 Rf 83
CES 33 Rf 87	CES 36 Rf 82	CES 32 Rf 86	CES 34 Rf 89	CES 35 Rf 95	CES 37 Rf 94	CES 38 Rf 79	CES 39 Rf 95	CES 40 Rf 93	CES 41 Rf 91	CES 42 Rf 89
CES 43 Rf 86	CES 44 Rf 99	CES 45 Rf 89	CES 46 Rf 90	CES 47 Rf 86	CES 48 Rf 83	CES 49 Rf 90	CES 50 Rf 90	CES 51 Rf 89	CES 52 Rf 90	CES 53 Rf 90
CES 54 Rf 92	CES 55 Rf 91	CES 56 Rf 92	CES 57 Rf 91	CES 58 Rf 92	CES 59 Rf 97	CES 60 Rf 94	CES 61 Rf 95	CES 62 Rf 88	CES 64 Rf 96	CES 65 Rf 95
CES 66 Rf 95	CES 67 Rf 96	CES 68 Rf 97	CES 63 Rf 94	CES 69 Rf 96	CES 70 Rf 98	CES 71 Rf 94	CES 72 Rf 98	CES 73 Rf 96	CES 75 Rf 96	CES 74 Rf 91
CES 76 Rf 97	CES 77 Rf 93	CES 78 Rf 97	CES 79 Rf 92	CES 80 Rf 95	CES 81 Rf 88	CES 82 Rf 98	CES 83 Rf 94	CES 84 Rf 98	CES 85 Rf 90	CES 86 Rf 93
CES 87 Rf 98	CES 88 Rf 92	CES 89 Rf 95	CES 90 Rf 89	CES 91 Rf 82	CES 92 Rf 92	CES 93 Rf 96	CES 94 Rf 93	CES 95 Rf 94	CES 96 Rf 100	CES 97 Rf 96

Shown as corresponding colours in sRGB (CAM02-UCS, adapted to D65); screen and print reproduction is only an approximation.

© Marvin Kuhn | SMotographers.com


Harlowe Avant Max

TM-30 colour samples & Academy SSI | Target CCT 2700 K

LED EVALUATOR


TM-30 RF	TM-30 RG	SSI [P2767]	CCT (TM-30)	DUV	TLCI (INFO)	MEASUREMENT
92	96	87	2766 K	0.0058	96	100 %

Fidelity per colour sample Rf,CES1-99

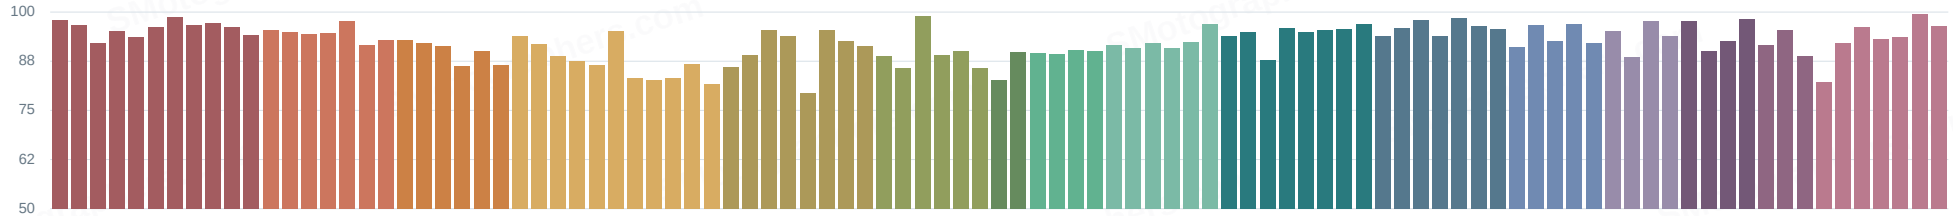


Samples sorted by hue bin 1-16; colour = hue bin.

Spectrum vs. TM-30 reference (equal area)

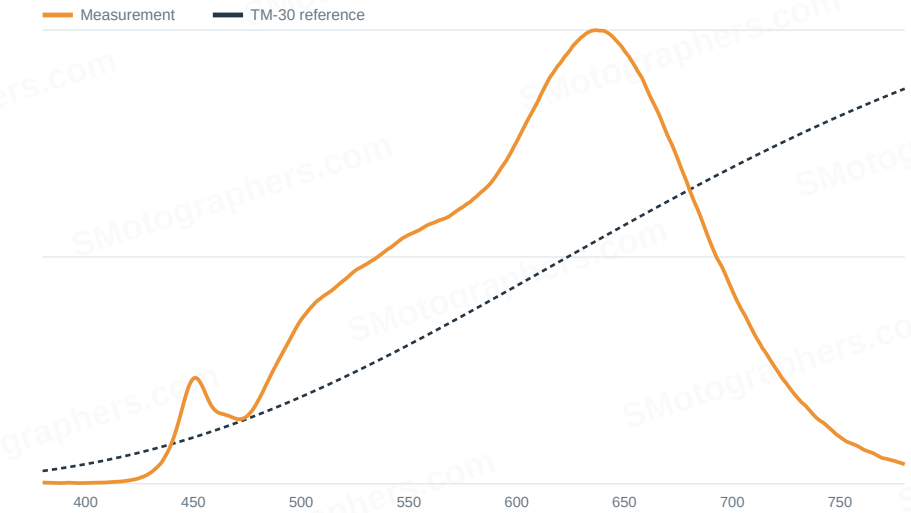

Academy SSI [P2767]

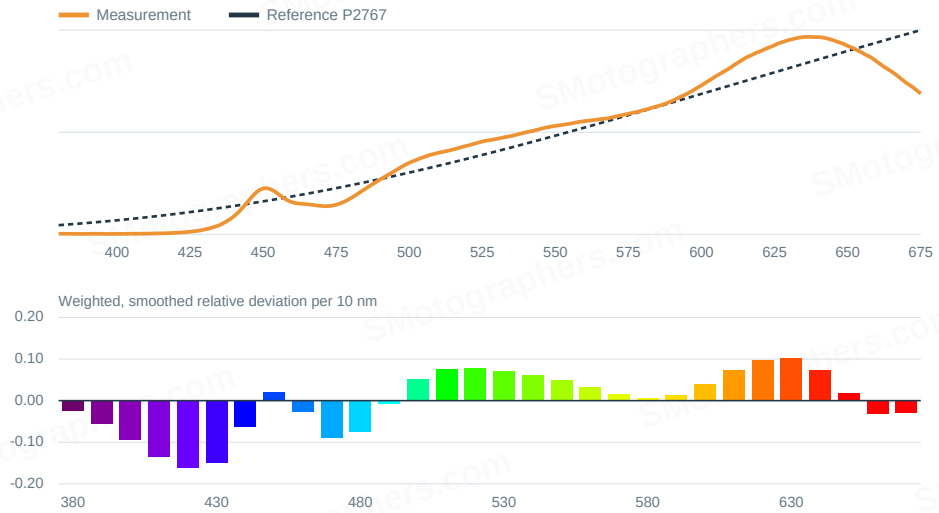

Reference as in the Academy SSI calculator (default): Planckian below 4000 K, CIE daylight from 4000 K, each at the measured CCT.

© Marvin Kuhn | SMotographers.com

Harlowe Avant Max


White light detail | Target CCT 3200 K

Level	Lux	Measured CCT	Duv	SDCM	Ra	R9	Peak
10%	378	3210 K	0.00129	5.73	95.4	87.0	637 nm
50%	1438	3137 K	0.00222	3.82	96.5	93.0	636 nm
100%	2683	3234 K	0.00164	6.53	96.8	93.0	636 nm


Colour metric	Value
SSI	84
TM-30 Rf	95
TM-30 Rg	101
TLCI (Info)	99
Measurements	3

Check	Value
Brightest level	100%
CCT deviation	34 K
Mired deviation	3.29
Source	Harlowe Avant Max 100% 3200


Output linearity

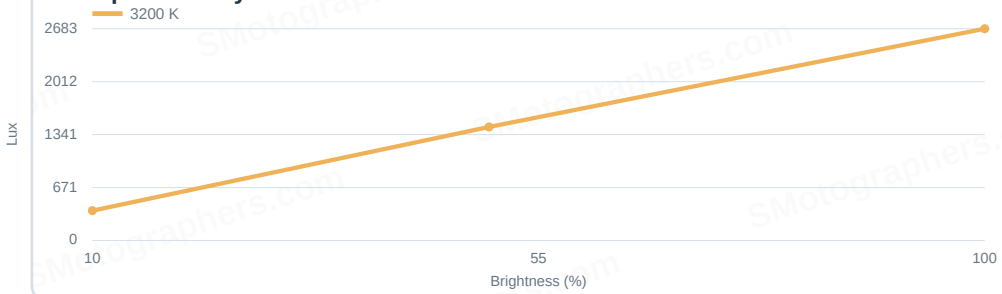

CRI R1-R15 at brightest level



Spectra of all brightness levels

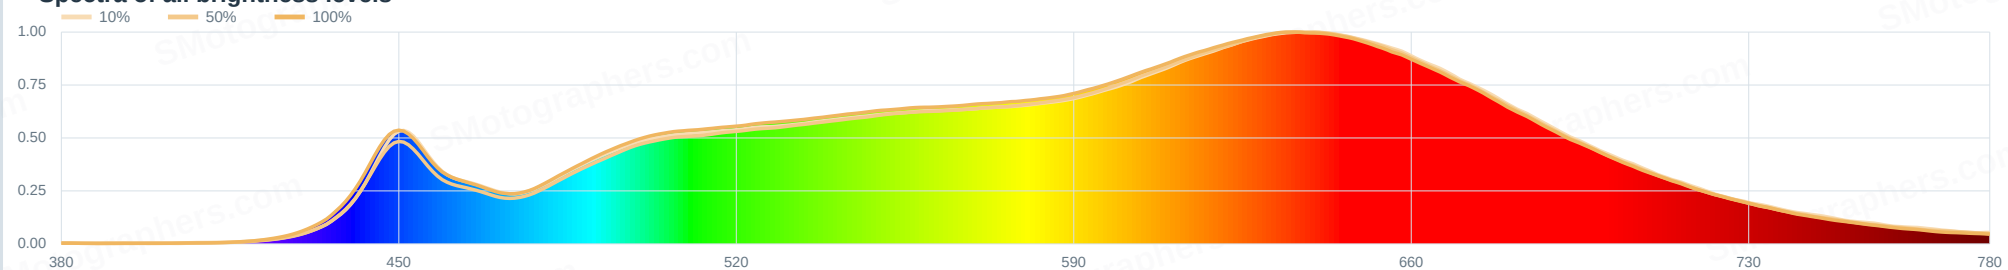

© Marvin Kuhn | SMotographers.com


Harlowe Avant Max

ANSI/IES TM-30 colour rendition | Target CCT 3200 K

LED EVALUATOR


TM-30 RF	TM-30 RG	SSI [P3243]	CCT (TM-30)	DUV	TLCI (INFO)	MEASUREMENT
95	101	84	3236 K	0.0016	99	100 %

Color Vector Graphic

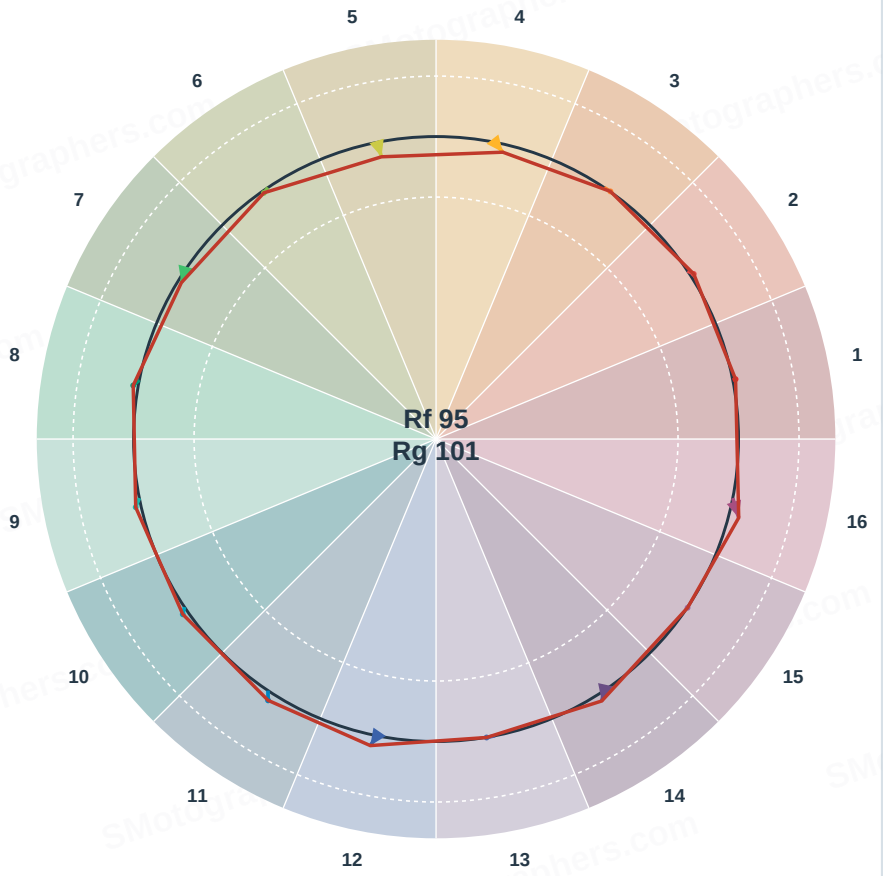


Circle = reference, arrows = shift of the test source per hue bin (CAM02-UCS).


Local chroma shift Rcs,hj

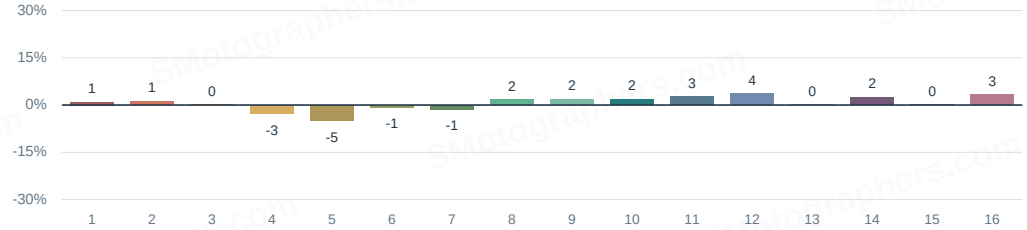

Local hue shift Rhs,hj

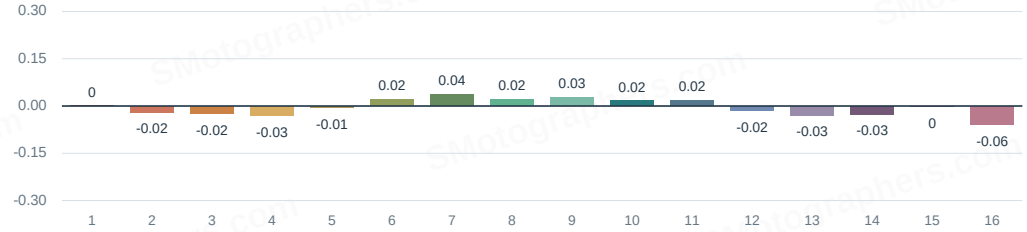

Local colour fidelity Rf,hj

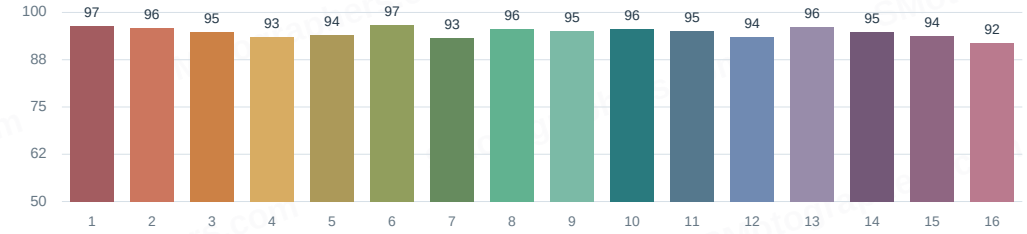

© Marvin Kuhn | SMotographers.com

Harlowe Avant Max

TM-30 colour swatches: reference vs. measurement | Target CCT 3200 K

LED EVALUATOR

TM-30 RF	TM-30 RG	SSI [P3243]	CCT (TM-30)	DUV	TLCI (INFO)	MEASUREMENT
95	101	84	3236 K	0.0016	99	100 %

Hue bins 1-16: average per bin



1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
+1 % Chroma	+1 % Chroma	+0 % Chroma	-3 % Chroma	-5 % Chroma	-1 % Chroma	-1 % Chroma	+2 % Chroma	+2 % Chroma	+2 % Chroma	+3 % Chroma	+4 % Chroma	+0 % Chroma	+2 % Chroma	+0 % Chroma	+3 % Chroma

Colour samples CES 1-99 (left reference, right measurement; sorted by hue bin)

CES 1 Rf 98	CES 2 Rf 97	CES 3 Rf 91	CES 4 Rf 97	CES 5 Rf 95	CES 6 Rf 98	CES 7 Rf 97	CES 8 Rf 98	CES 9 Rf 99	CES 98 Rf 98	CES 99 Rf 95
CES 10 Rf 96	CES 11 Rf 95	CES 12 Rf 95	CES 13 Rf 97	CES 14 Rf 98	CES 15 Rf 94	CES 16 Rf 97	CES 17 Rf 96	CES 18 Rf 95	CES 19 Rf 94	CES 20 Rf 97
CES 21 Rf 94	CES 22 Rf 92	CES 23 Rf 96	CES 24 Rf 96	CES 25 Rf 94	CES 26 Rf 94	CES 27 Rf 89	CES 28 Rf 98	CES 29 Rf 92	CES 30 Rf 89	CES 31 Rf 93
CES 32 Rf 96	CES 33 Rf 94	CES 34 Rf 97	CES 35 Rf 99	CES 36 Rf 82	CES 37 Rf 97	CES 38 Rf 85	CES 39 Rf 98	CES 40 Rf 98	CES 41 Rf 96	CES 42 Rf 96
CES 43 Rf 97	CES 44 Rf 99	CES 45 Rf 96	CES 46 Rf 97	CES 47 Rf 94	CES 48 Rf 89	CES 49 Rf 97	CES 50 Rf 95	CES 51 Rf 95	CES 52 Rf 96	CES 53 Rf 96
CES 54 Rf 93	CES 55 Rf 93	CES 56 Rf 96	CES 57 Rf 96	CES 58 Rf 97	CES 59 Rf 98	CES 60 Rf 94	CES 61 Rf 95	CES 62 Rf 89	CES 64 Rf 97	CES 65 Rf 97
CES 66 Rf 97	CES 67 Rf 97	CES 68 Rf 96	CES 63 Rf 97	CES 69 Rf 95	CES 70 Rf 96	CES 71 Rf 93	CES 72 Rf 97	CES 73 Rf 92	CES 75 Rf 94	CES 76 Rf 97
CES 74 Rf 92	CES 77 Rf 94	CES 78 Rf 93	CES 79 Rf 95	CES 80 Rf 96	CES 81 Rf 93	CES 82 Rf 98	CES 83 Rf 97	CES 84 Rf 97	CES 85 Rf 89	CES 86 Rf 97
CES 87 Rf 97	CES 88 Rf 95	CES 89 Rf 96	CES 90 Rf 93	CES 92 Rf 91	CES 91 Rf 78	CES 93 Rf 95	CES 94 Rf 95	CES 95 Rf 91	CES 96 Rf 97	CES 97 Rf 96

Shown as corresponding colours in sRGB (CAM02-UCS, adapted to D65); screen and print reproduction is only an approximation.

© Marvin Kuhn | SMotographers.com


Harlowe Avant Max

TM-30 colour samples & Academy SSI | Target CCT 3200 K

LED EVALUATOR


TM-30 RF	TM-30 RG	SSI [P3243]	CCT (TM-30)	DUV	TLCI (INFO)	MEASUREMENT
95	101	84	3236 K	0.0016	99	100 %

Fidelity per colour sample Rf,CES1-99

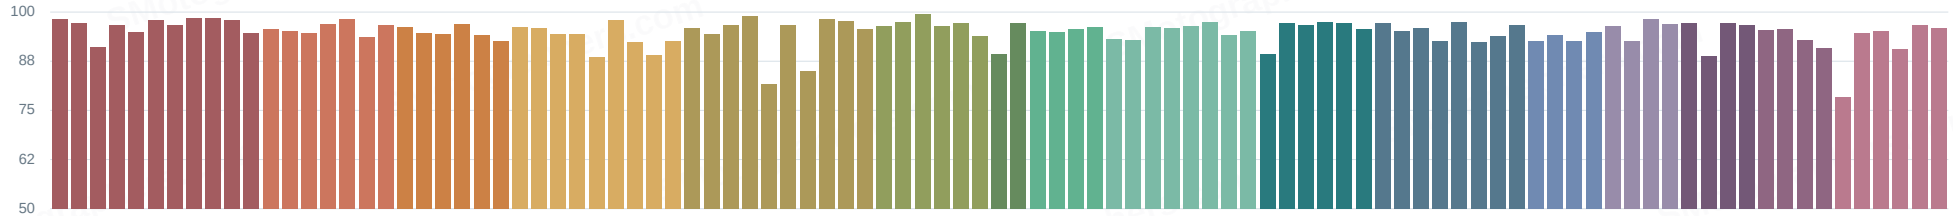


Samples sorted by hue bin 1-16; colour = hue bin.

Spectrum vs. TM-30 reference (equal area)

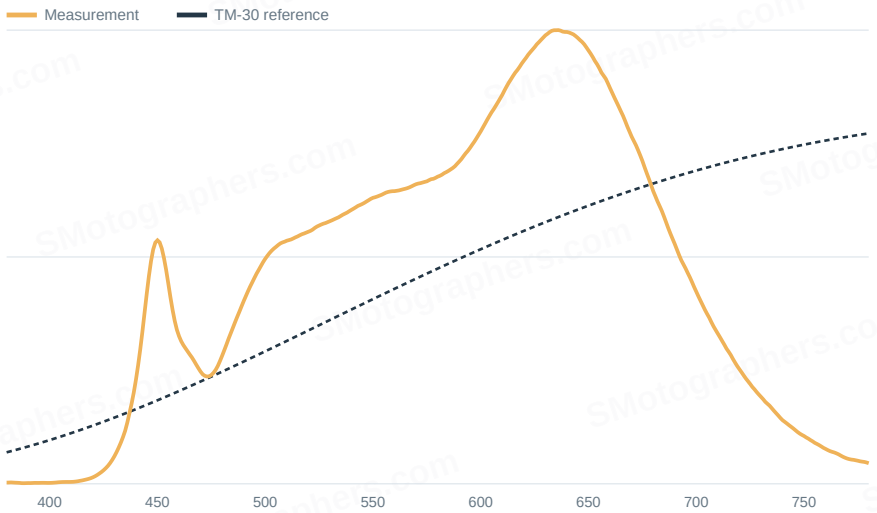

Academy SSI [P3243]

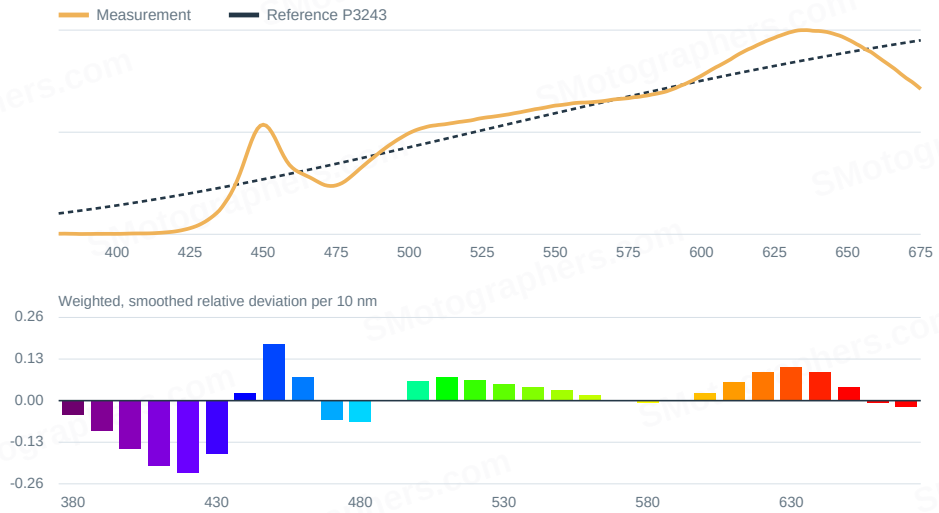

Reference as in the Academy SSI calculator (default): Planckian below 4000 K, CIE daylight from 4000 K, each at the measured CCT.

© Marvin Kuhn | SMotographers.com

Harlowe Avant Max


White light detail | Target CCT 5500 K

Level	Lux	Measured CCT	Duv	SDCM	Ra	R9	Peak
10%	461	5838 K	0.00536	5.22	98.4	90.0	450 nm
50%	1667	5964 K	0.00549	6.49	98.5	94.0	449 nm
100%	3072	5894 K	0.00443	4.73	98.2	93.0	449 nm


Colour metric	Value
SSI	73
TM-30 Rf	96
TM-30 Rg	102
TLCI (Info)	99
Measurements	3

Check	Value
Brightest level	100%
CCT deviation	394 K
Mired deviation	12.15
Source	Harlowe Avant Max 100% 5500


Output linearity

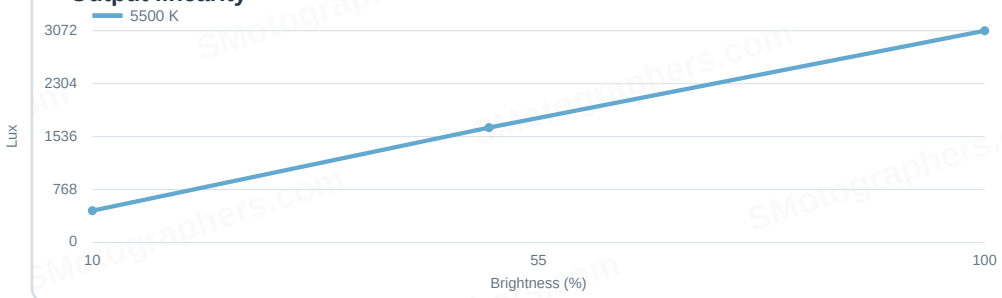

CRI R1-R15 at brightest level



Spectra of all brightness levels

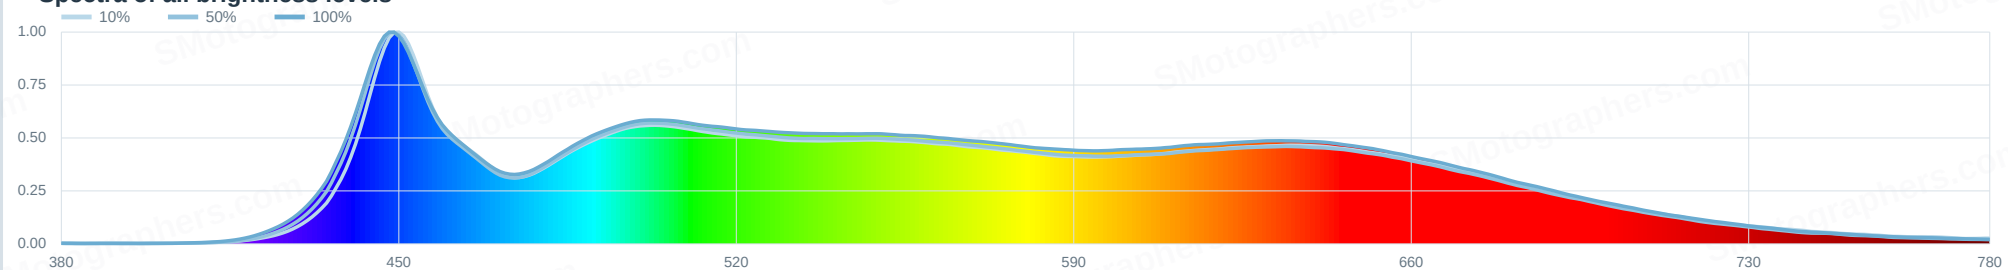

© Marvin Kuhn | SMotographers.com


Harlowe Avant Max

ANSI/IES TM-30 colour rendition | Target CCT 5500 K

LED EVALUATOR


TM-30 RF	TM-30 RG	SSI [D5889]	CCT (TM-30)	DUV	TLCI (INFO)	MEASUREMENT
96	102	73	5889 K	0.0044	99	100 %

Color Vector Graphic

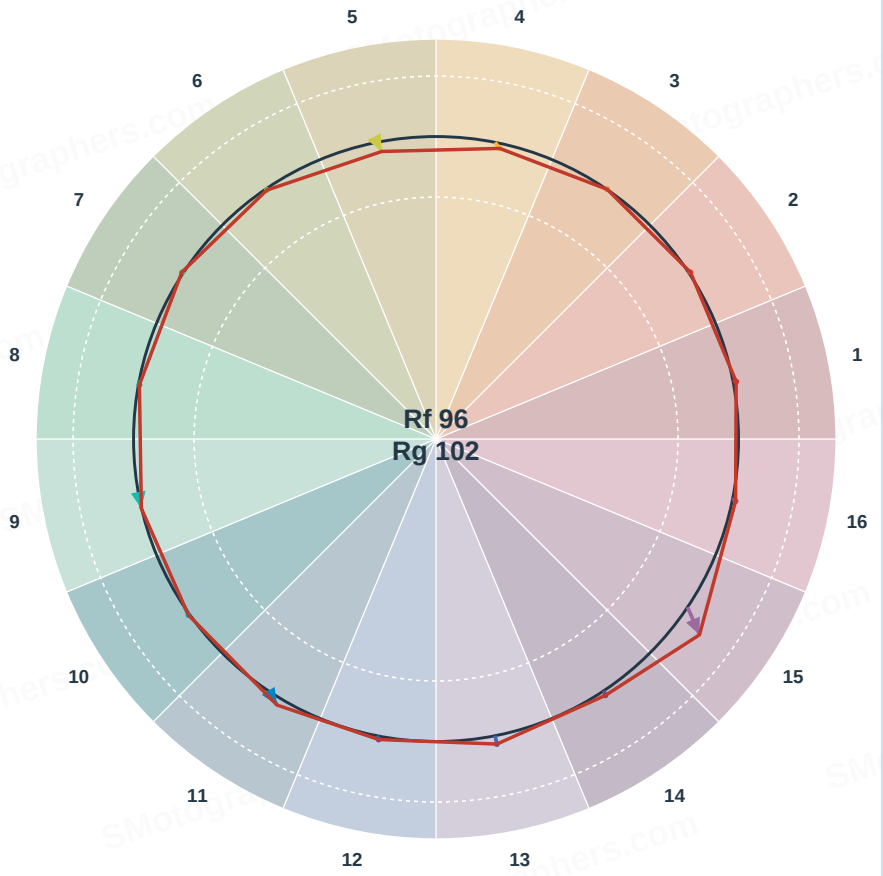


Circle = reference, arrows = shift of the test source per hue bin (CAM02-UCS).


Local chroma shift Rcs,hj

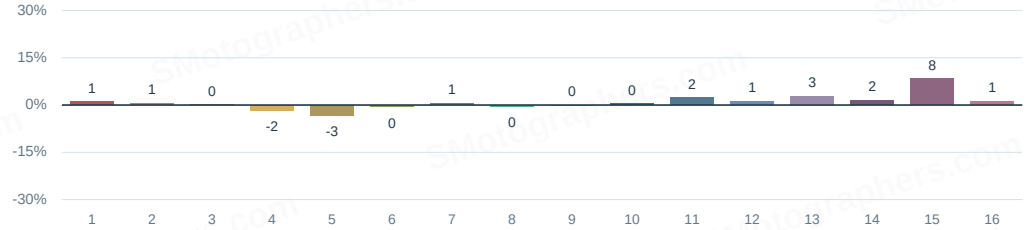

Local hue shift Rhs,hj

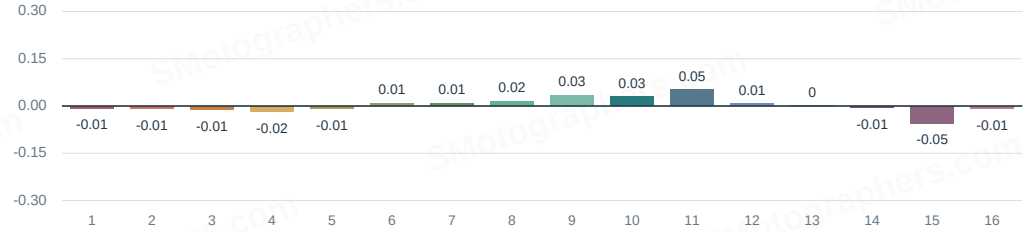

Local colour fidelity Rf,hj

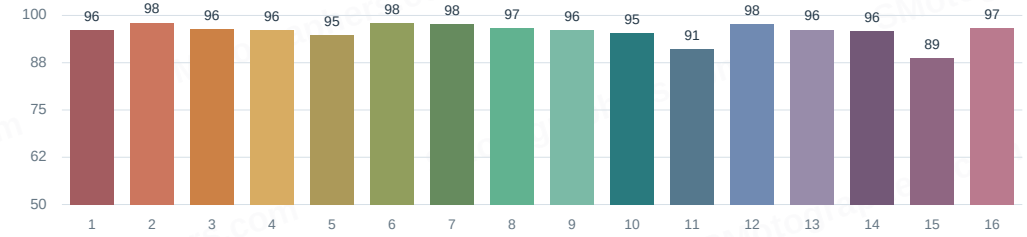

© Marvin Kuhn | SMotographers.com

Harlowe Avant Max

TM-30 colour swatches: reference vs. measurement | Target CCT 5500 K

LED EVALUATOR

TM-30 RF	TM-30 RG	SSI [D5889]	CCT (TM-30)	DUV	TLCI (INFO)	MEASUREMENT
96	102	73	5889 K	0.0044	99	100 %

Hue bins 1-16: average per bin



Colour samples CES 1-99 (left reference, right measurement; sorted by hue bin)

CES 2 Rf 99	CES 3 Rf 87	CES 4 Rf 99	CES 5 Rf 96	CES 6 Rf 98	CES 7 Rf 97	CES 8 Rf 98	CES 9 Rf 99	CES 10 Rf 98	CES 11 Rf 97	CES 12 Rf 97	CES 13 Rf 98	CES 14 Rf 99	CES 15 Rf 94	CES 16 Rf 98	CES 17 Rf 98	CES 18 Rf 96	CES 19 Rf 98	CES 20 Rf 93	CES 21 Rf 98	CES 22 Rf 96	CES 23 Rf 97
CES 24 Rf 99	CES 25 Rf 98	CES 26 Rf 98	CES 27 Rf 88	CES 28 Rf 99	CES 29 Rf 96	CES 30 Rf 92	CES 31 Rf 96	CES 32 Rf 99	CES 33 Rf 97	CES 34 Rf 100	CES 35 Rf 99	CES 36 Rf 81	CES 37 Rf 98	CES 38 Rf 87	CES 39 Rf 99	CES 40 Rf 98	CES 41 Rf 97	CES 42 Rf 98	CES 43 Rf 97	CES 44 Rf 100	CES 45 Rf 98
CES 46 Rf 99	CES 47 Rf 99	CES 48 Rf 93	CES 49 Rf 98	CES 50 Rf 98	CES 51 Rf 97	CES 52 Rf 97	CES 53 Rf 98	CES 54 Rf 95	CES 55 Rf 94	CES 56 Rf 99	CES 57 Rf 98	CES 58 Rf 99	CES 59 Rf 98	CES 60 Rf 94	CES 61 Rf 95	CES 62 Rf 90	CES 63 Rf 99	CES 64 Rf 98	CES 65 Rf 96	CES 66 Rf 97	CES 67 Rf 96
CES 68 Rf 94	CES 69 Rf 93	CES 70 Rf 93	CES 71 Rf 88	CES 72 Rf 96	CES 73 Rf 87	CES 74 Rf 94	CES 75 Rf 89	CES 76 Rf 93	CES 77 Rf 91	CES 78 Rf 88	CES 79 Rf 99	CES 80 Rf 96	CES 81 Rf 98	CES 82 Rf 98	CES 83 Rf 99	CES 84 Rf 96	CES 85 Rf 88	CES 86 Rf 99	CES 87 Rf 95	CES 88 Rf 98	CES 89 Rf 95
CES 90 Rf 96	CES 91 Rf 73	CES 92 Rf 88	CES 93 Rf 93	CES 94 Rf 94	CES 95 Rf 87	CES 1 Rf 99	CES 96 Rf 95	CES 97 Rf 95	CES 98 Rf 97	CES 99 Rf 96											

Shown as corresponding colours in sRGB (CAM02-UCS, adapted to D65); screen and print reproduction is only an approximation.

© Marvin Kuhn | SMotographers.com


Harlowe Avant Max

TM-30 colour samples & Academy SSI | Target CCT 5500 K

LED EVALUATOR


TM-30 RF	TM-30 RG	SSI [D5889]	CCT (TM-30)	DUV	TLCI (INFO)	MEASUREMENT
96	102	73	5889 K	0.0044	99	100 %

Fidelity per colour sample Rf,CES1-99

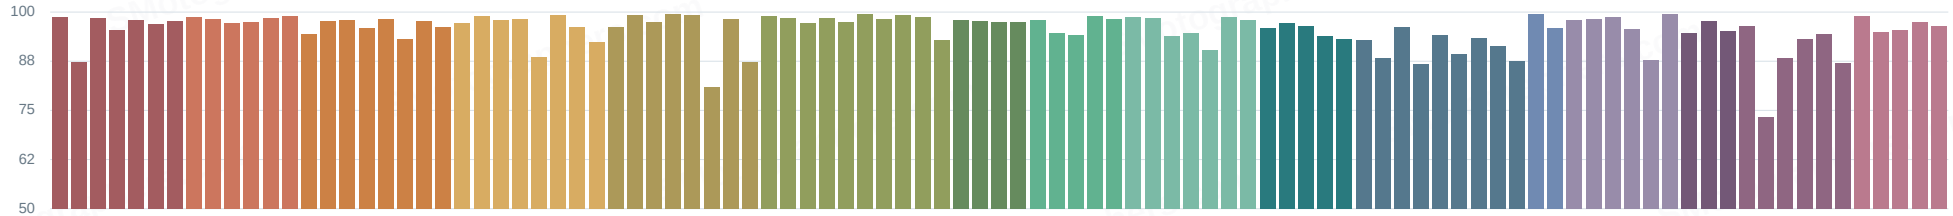


Samples sorted by hue bin 1-16; colour = hue bin.

Spectrum vs. TM-30 reference (equal area)

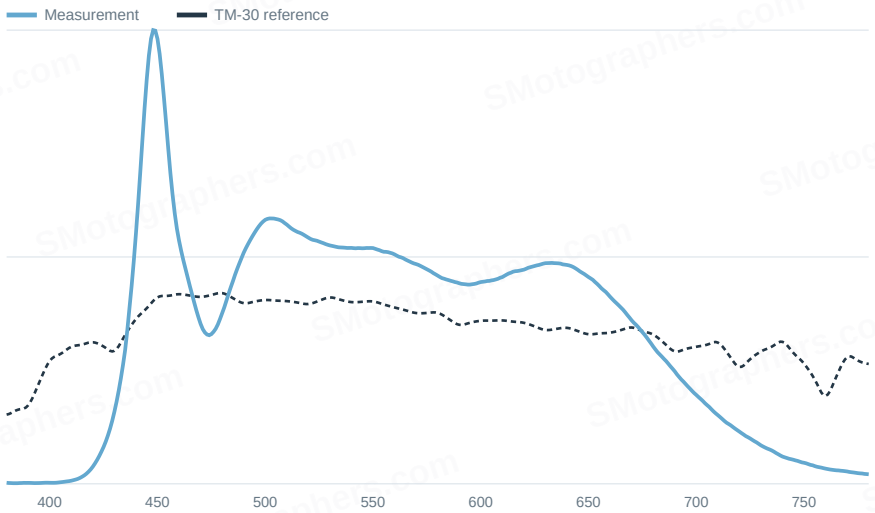

Academy SSI [D5889]

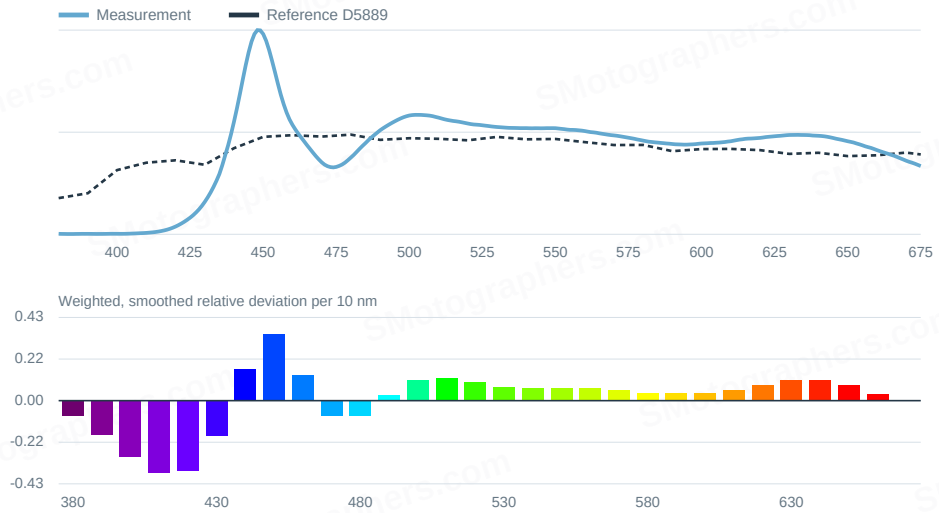

Reference as in the Academy SSI calculator (default): Planckian below 4000 K, CIE daylight from 4000 K, each at the measured CCT.

© Marvin Kuhn | SMotographers.com

Harlowe Avant Max


White light detail | Target CCT 6500 K

Level	Lux	Measured CCT	Duv	SDCM	Ra	R9	Peak
100%	3036	6858 K	0.00732	4.93	97.6	95.0	449 nm
100%	2812	6858 K	0.00732	4.93	97.6	95.0	449 nm


Colour metric	Value
SSI	70
TM-30 Rf	95
TM-30 Rg	100
TLCI (Info)	99
Measurements	2

Check	Value
Brightest level	100%
CCT deviation	358 K
Mired deviation	8.03
Source	Harlowe Avant Max 100% 6500


Output linearity

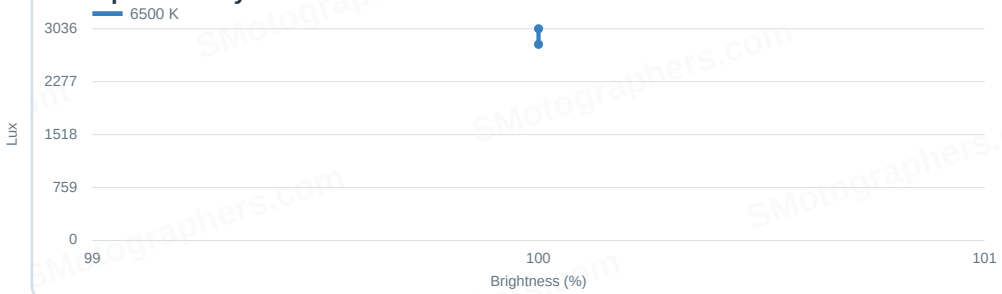

CRI R1-R15 at brightest level

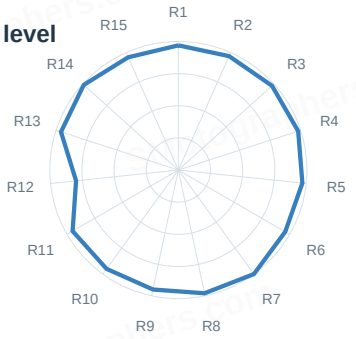

Spectra of all brightness levels

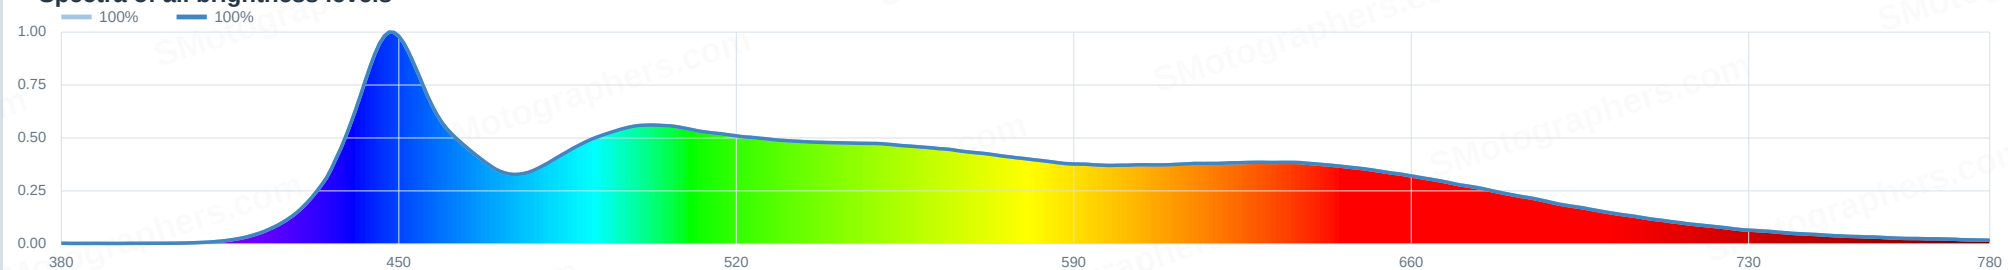

© Marvin Kuhn | SMotographers.com


Harlowe Avant Max

ANSI/IES TM-30 colour rendition | Target CCT 6500 K

LED EVALUATOR


TM-30 RF	TM-30 RG	SSI [D6862]	CCT (TM-30)	DUV	TLCI (INFO)	MEASUREMENT
95	100	70	6859 K	0.0074	99	100 %

Color Vector Graphic

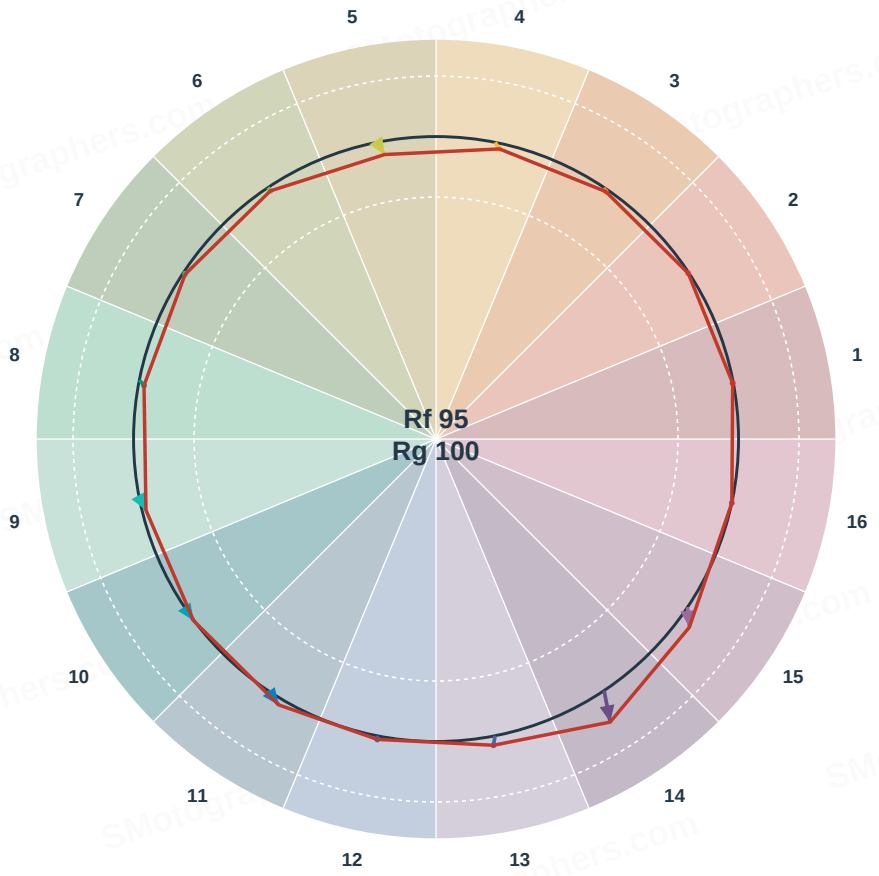


Circle = reference, arrows = shift of the test source per hue bin (CAM02-UCS).


Local chroma shift Rcs,hj

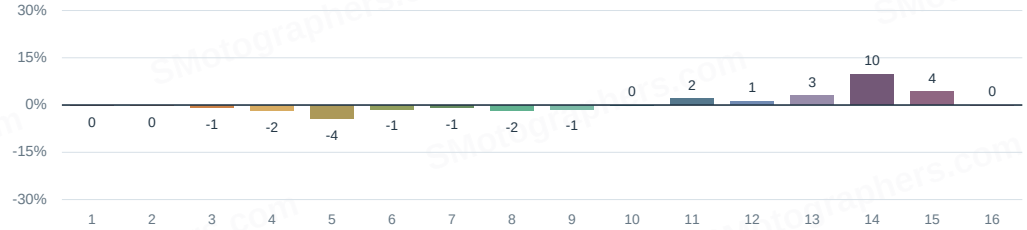

Local hue shift Rhs,hj

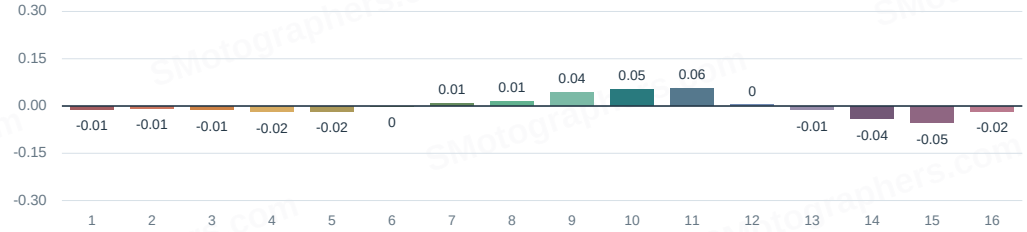

Local colour fidelity Rf,hj

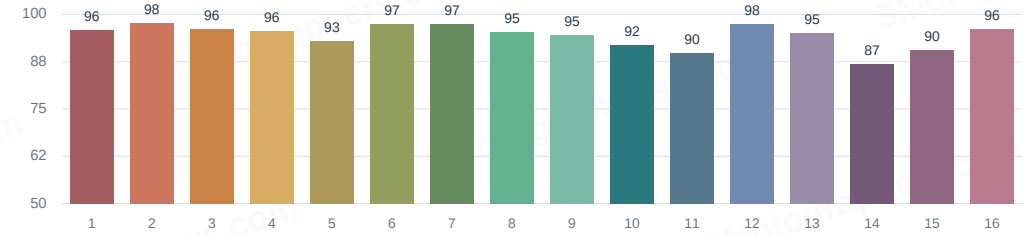

© Marvin Kuhn | SMotographers.com

Harlowe Avant Max

TM-30 colour swatches: reference vs. measurement | Target CCT 6500 K

LED EVALUATOR

TM-30 RF	TM-30 RG	SSI [D6862]	CCT (TM-30)	DUV	TLCI (INFO)	MEASUREMENT
95	100	70	6859 K	0.0074	99	100 %

Hue bins 1-16: average per bin



Colour samples CES 1-99 (left reference, right measurement; sorted by hue bin)

CES 2 Rf 98	CES 3 Rf 86	CES 4 Rf 98	CES 5 Rf 95	CES 6 Rf 97	CES 7 Rf 99	CES 8 Rf 99	CES 10 Rf 98	CES 11 Rf 96	CES 12 Rf 97	CES 13 Rf 98	CES 14 Rf 99	CES 9 Rf 98	CES 15 Rf 94	CES 16 Rf 97	CES 17 Rf 97	CES 18 Rf 95	CES 19 Rf 98	CES 20 Rf 94	CES 21 Rf 98
CES 22 Rf 95	CES 23 Rf 97	CES 24 Rf 99	CES 25 Rf 98	CES 26 Rf 97	CES 27 Rf 87	CES 28 Rf 99	CES 29 Rf 94	CES 30 Rf 90	CES 31 Rf 94	CES 32 Rf 98	CES 33 Rf 95	CES 34 Rf 99	CES 35 Rf 100	CES 36 Rf 78	CES 37 Rf 98	CES 38 Rf 84	CES 39 Rf 99	CES 40 Rf 98	CES 41 Rf 96
CES 42 Rf 99	CES 43 Rf 98	CES 44 Rf 99	CES 45 Rf 99	CES 46 Rf 98	CES 47 Rf 97	CES 48 Rf 91	CES 49 Rf 98	CES 50 Rf 97	CES 51 Rf 97	CES 52 Rf 98	CES 53 Rf 97	CES 54 Rf 94	CES 55 Rf 93	CES 56 Rf 97	CES 57 Rf 96	CES 58 Rf 96	CES 59 Rf 98	CES 60 Rf 93	CES 61 Rf 94
CES 62 Rf 88	CES 63 Rf 98	CES 64 Rf 96	CES 65 Rf 94	CES 66 Rf 95	CES 67 Rf 94	CES 68 Rf 93	CES 69 Rf 92	CES 70 Rf 92	CES 71 Rf 86	CES 74 Rf 93	CES 72 Rf 96	CES 73 Rf 85	CES 75 Rf 87	CES 76 Rf 93	CES 77 Rf 91	CES 78 Rf 87	CES 79 Rf 99	CES 80 Rf 96	CES 81 Rf 96
CES 82 Rf 98	CES 83 Rf 98	CES 84 Rf 95	CES 85 Rf 87	CES 86 Rf 98	CES 87 Rf 94	CES 88 Rf 97	CES 89 Rf 94	CES 91 Rf 70	CES 90 Rf 96	CES 92 Rf 87	CES 93 Rf 92	CES 94 Rf 93	CES 95 Rf 85	CES 1 Rf 99	CES 96 Rf 94	CES 97 Rf 95	CES 98 Rf 96	CES 99 Rf 97	

Shown as corresponding colours in sRGB (CAM02-UCS, adapted to D65); screen and print reproduction is only an approximation.

© Marvin Kuhn | SMotographers.com


Harlowe Avant Max

TM-30 colour samples & Academy SSI | Target CCT 6500 K

LED EVALUATOR


TM-30 RF	TM-30 RG	SSI [D6862]	CCT (TM-30)	DUV	TLCI (INFO)	MEASUREMENT
95	100	70	6859 K	0.0074	99	100 %

Fidelity per colour sample Rf,CES1-99

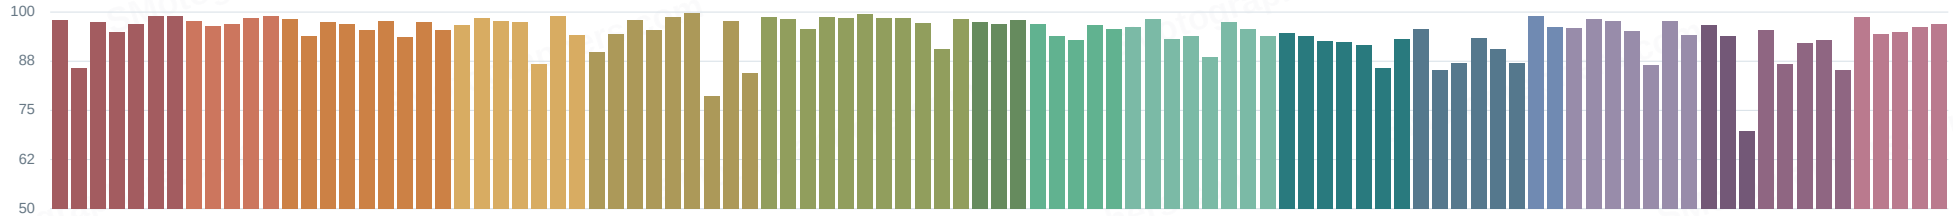


Samples sorted by hue bin 1-16; colour = hue bin.

Spectrum vs. TM-30 reference (equal area)

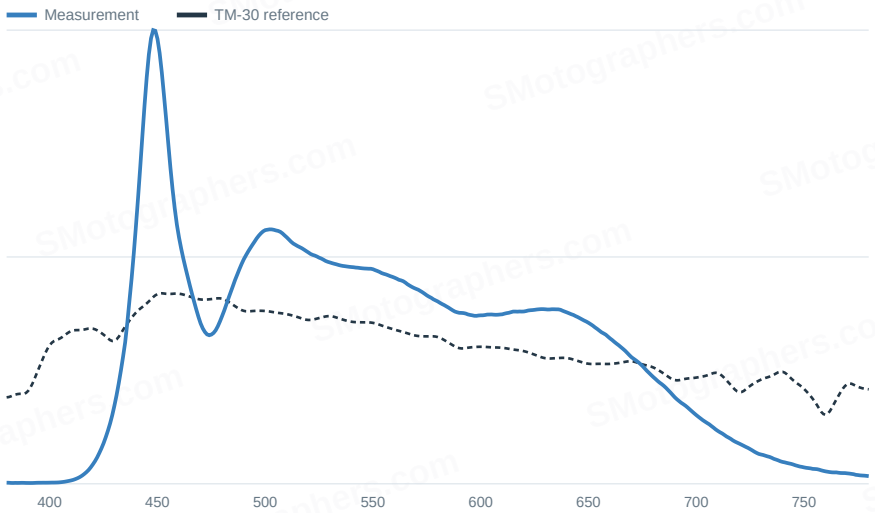

Academy SSI [D6862]

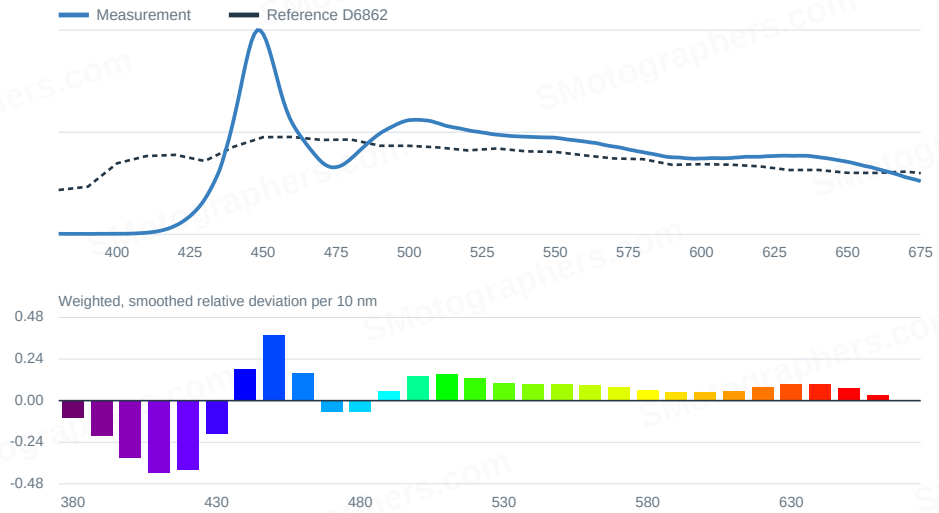

Reference as in the Academy SSI calculator (default): Planckian below 4000 K, CIE daylight from 4000 K, each at the measured CCT.


© Marvin Kuhn | SMotographers.com

Harlowe Avant Max

Reflectors | Maximum output

Reflector	Target CCT	Lux	EV	Measured CCT	Duv	Source
Standard reflector	-	10595	12.05	5687 K	0.00419	Harlowe Avant Max 100% max with reflector

Max EV per reflector

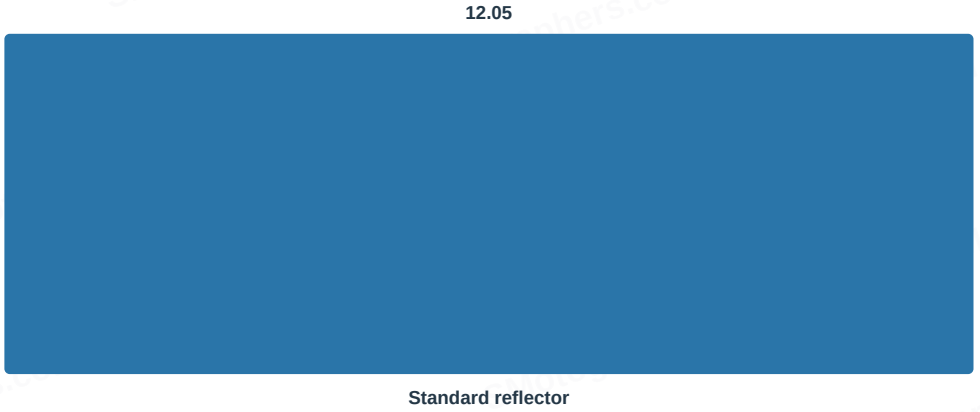

© Marvin Kuhn | SMotographers.com