







ANSI/IES TM-30-18 Color Rendition Report

Source: Marvin Kuhn

Date: 23.01.26

Manufacturer: Nanlite

Model: FC-60B

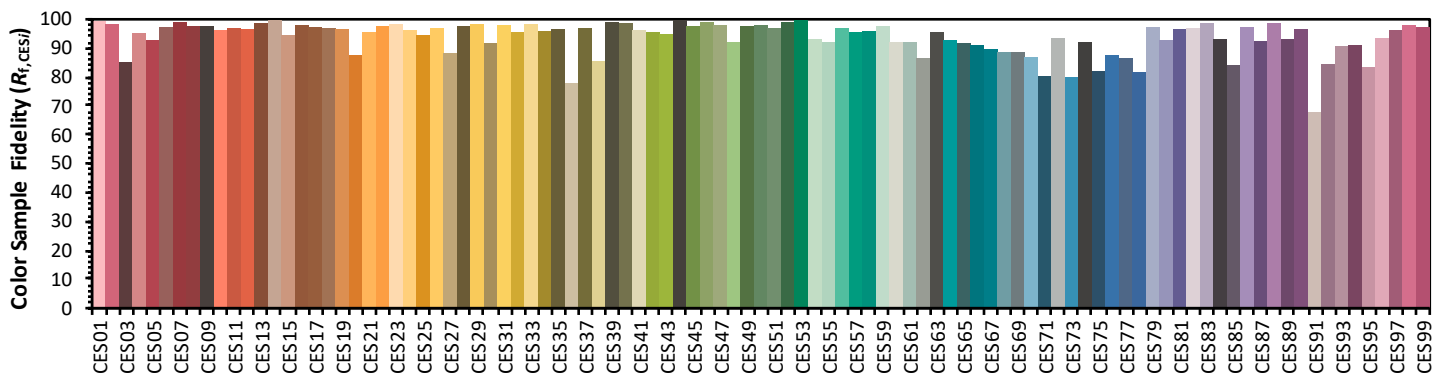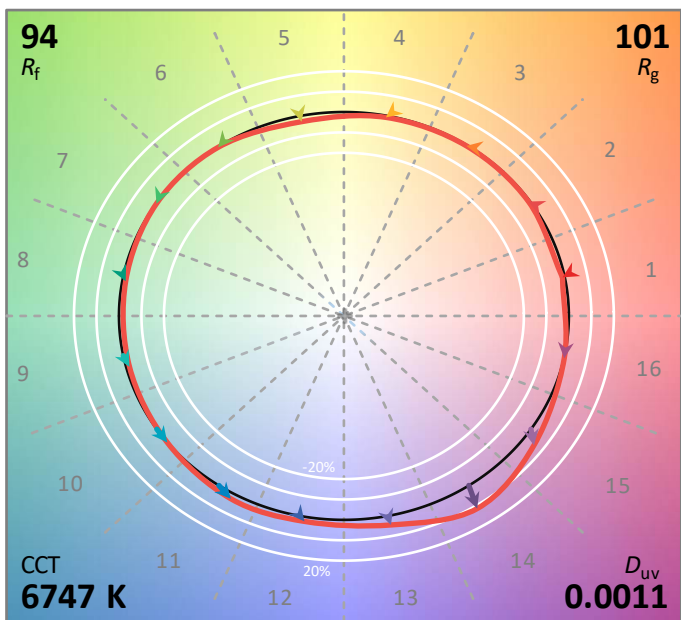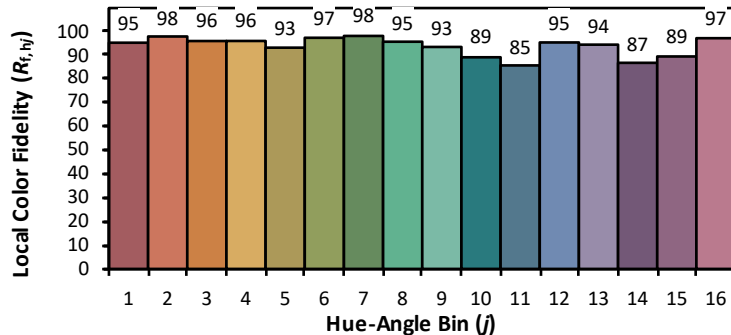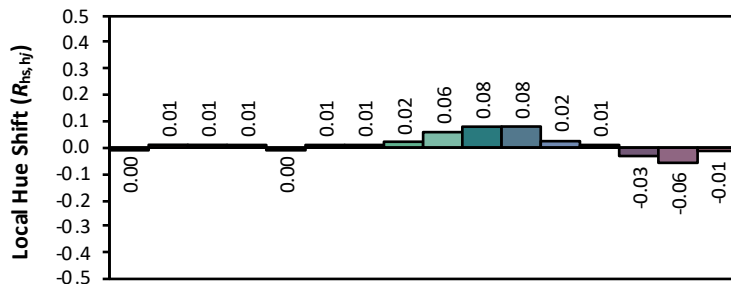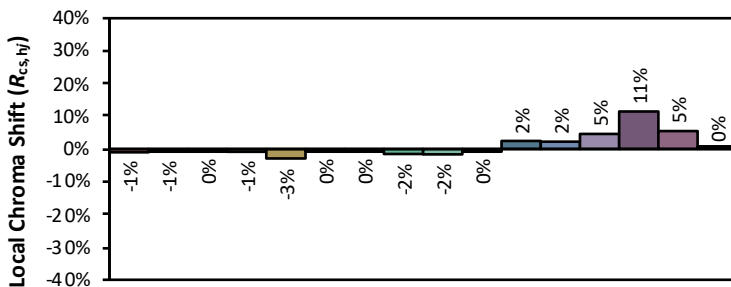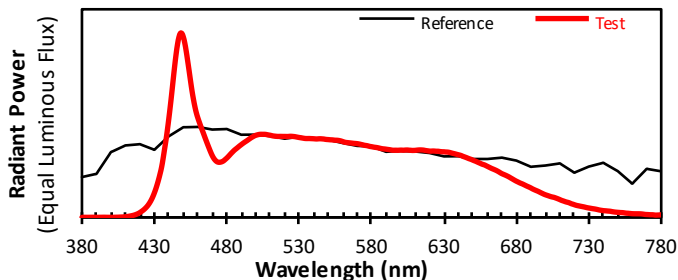

Notes: This is a recommended method for displaying ANSI/IES TM-30-18 information.

 $x = 0.3095$

y **0.3219**

u' **0.1983**

 ν' 0.4640

CIE 13.3-1995
(CRI)

R_a 97







R_9 95

Colors are for visual orientation purposes only. Created with the ANSI/IES TM-30-18 Calculator Version 2.00.

ANSI/IES TM-30-18 Color Rendition Report

Source: Marvin Kuhn
Date: 23.01.26

Manufacturer: Nanlite
Model: FC-60B

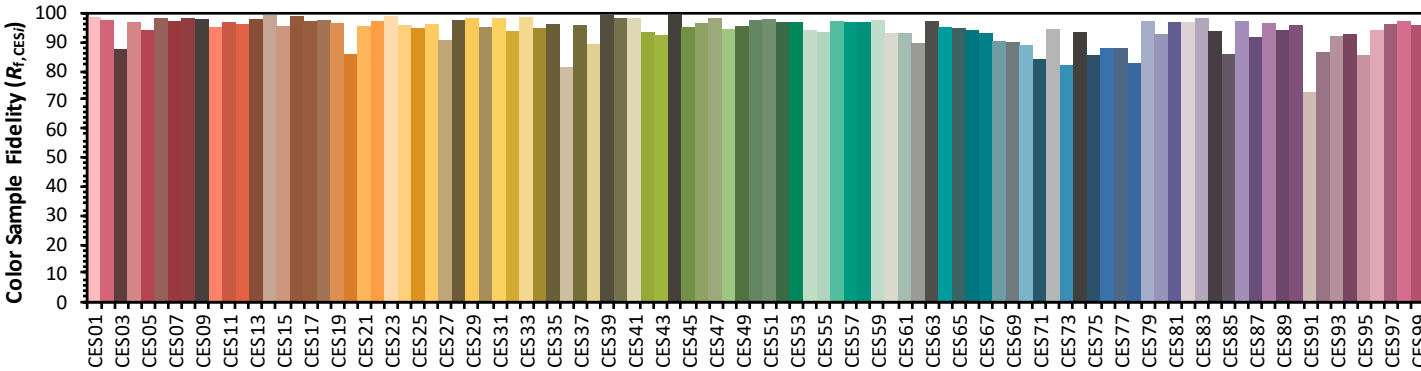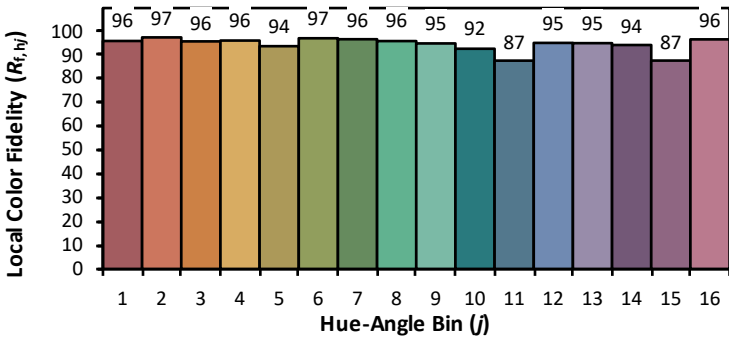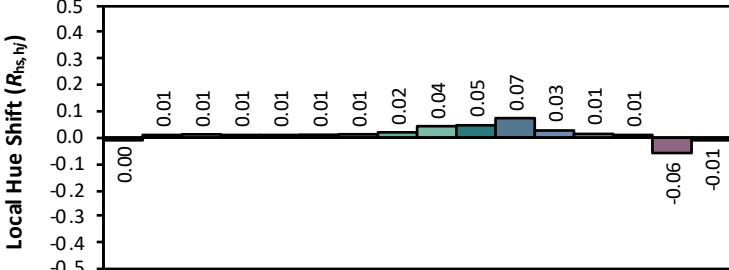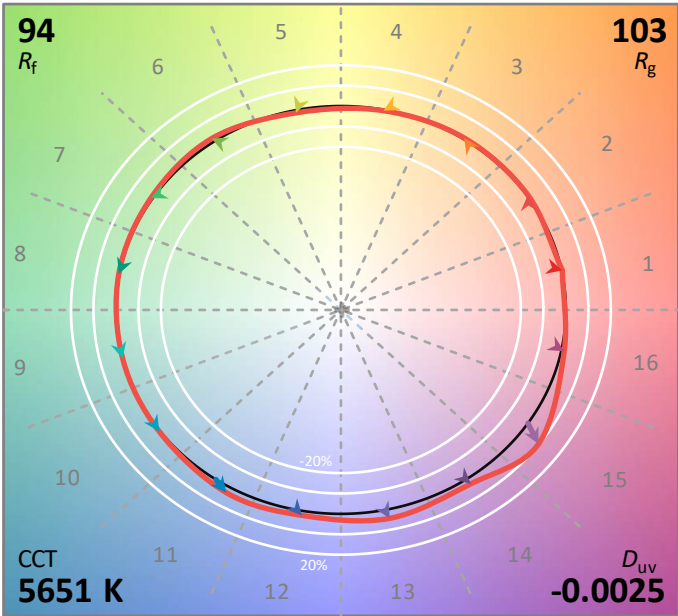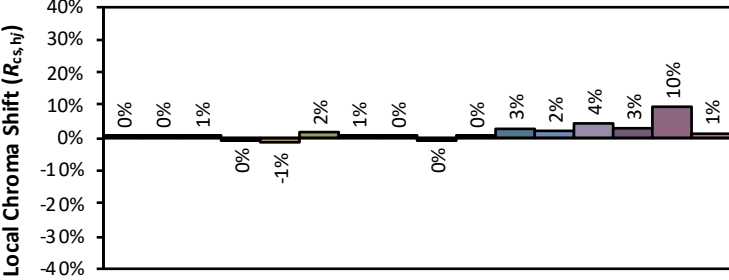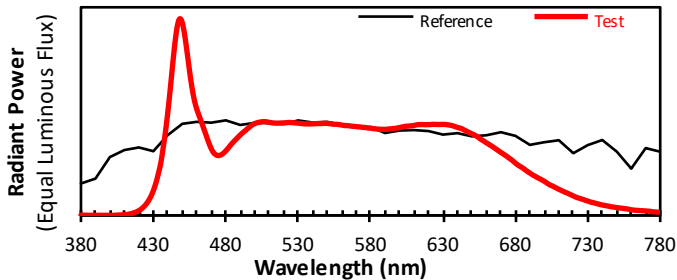

Notes: This is a recommended method for displaying ANSI/IES TM-30-18 information.







x 0.3292
y 0.3333
u' 0.2076
v' 0.4730

CIE 13.3-1995	
(CRI)	
R _a	97
R ₉	92

ANSI/IES TM-30-18 Color Rendition Report

Source: Marvin Kuhn
Date: 23.01.26

Manufacturer: Nanlite
Model: FC-60B

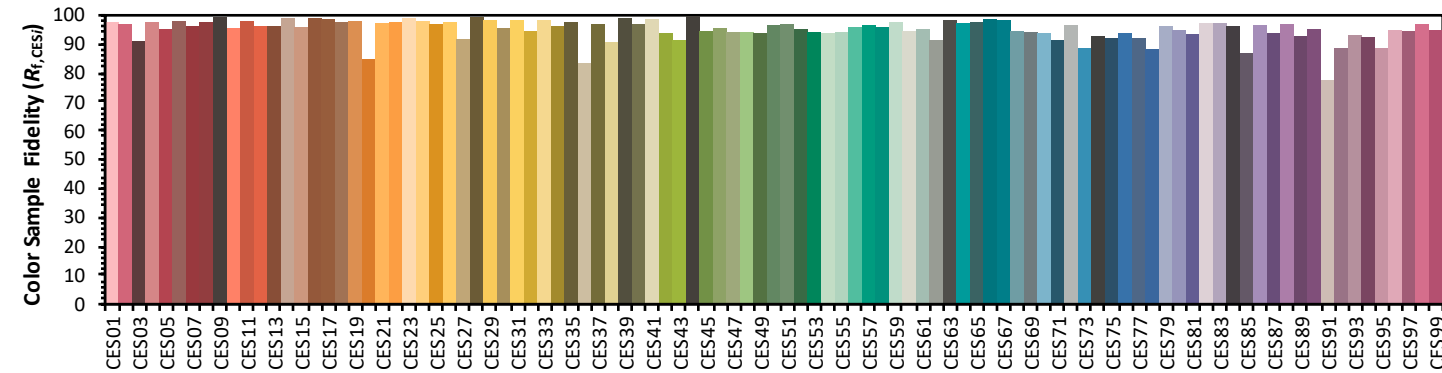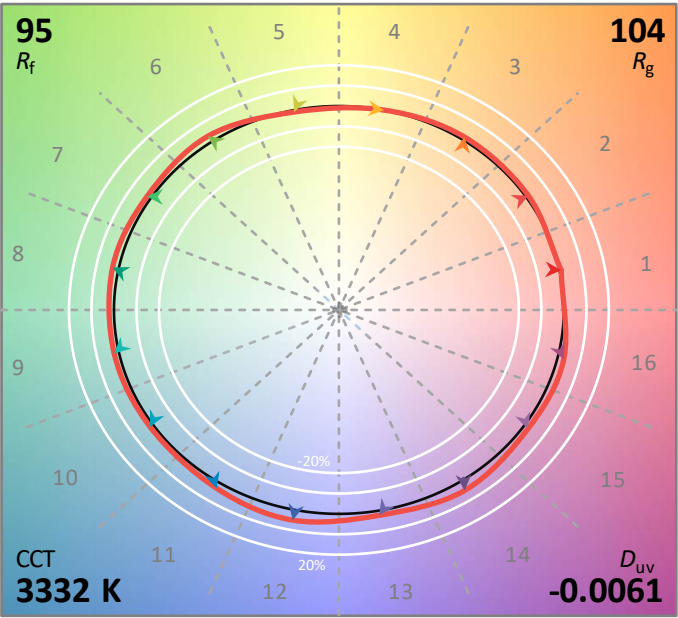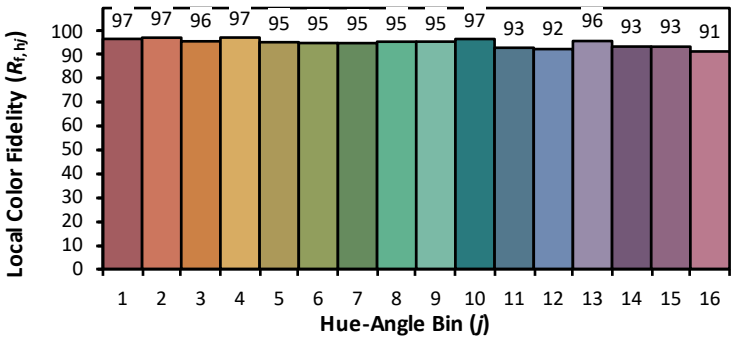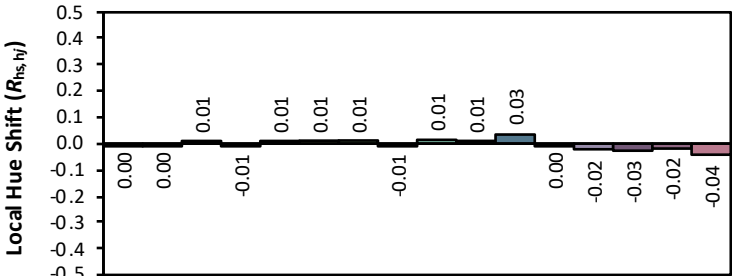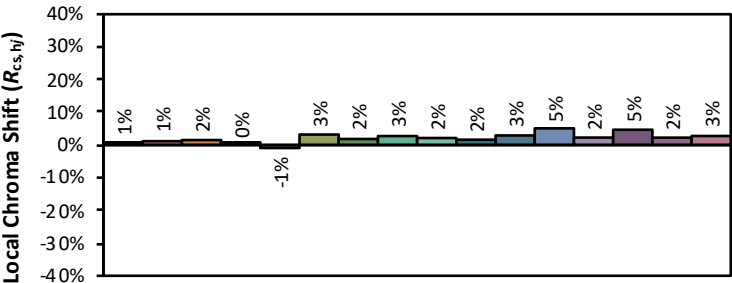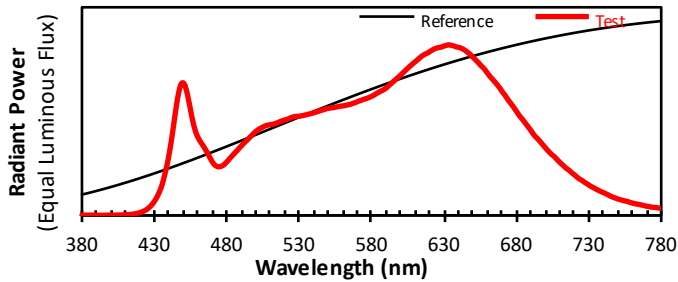

Notes: This is a recommended method for displaying ANSI/IES TM-30-18 information.







x 0.4082
y 0.3784
u' 0.2428
v' 0.5065

CIE 13.3-1995	
(CRI)	
R _a	95
R ₉	92

ANSI/IES TM-30-18 Color Rendition Report

Source: Marvin Kuhn
Date: 23.01.26

Manufacturer: Nanlite
Model: FC-60B

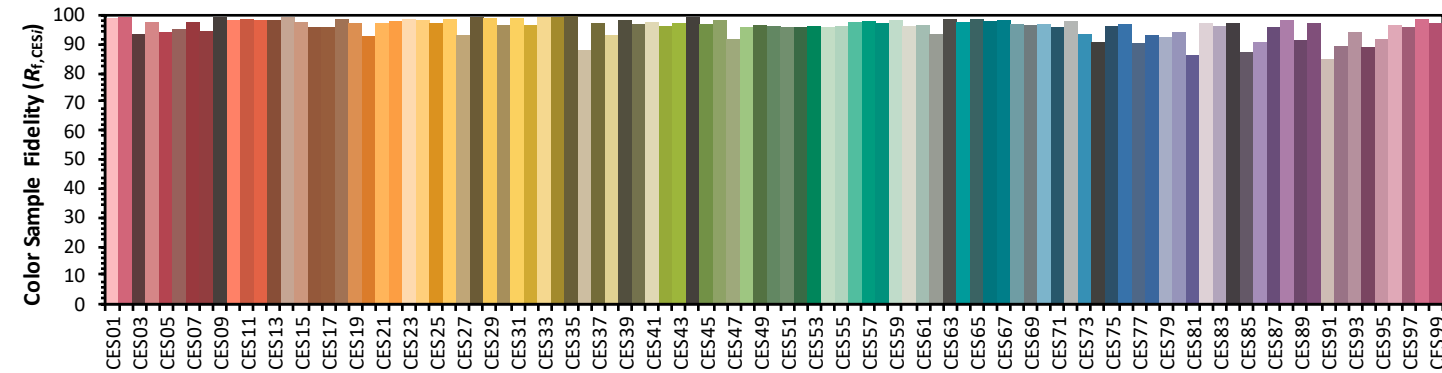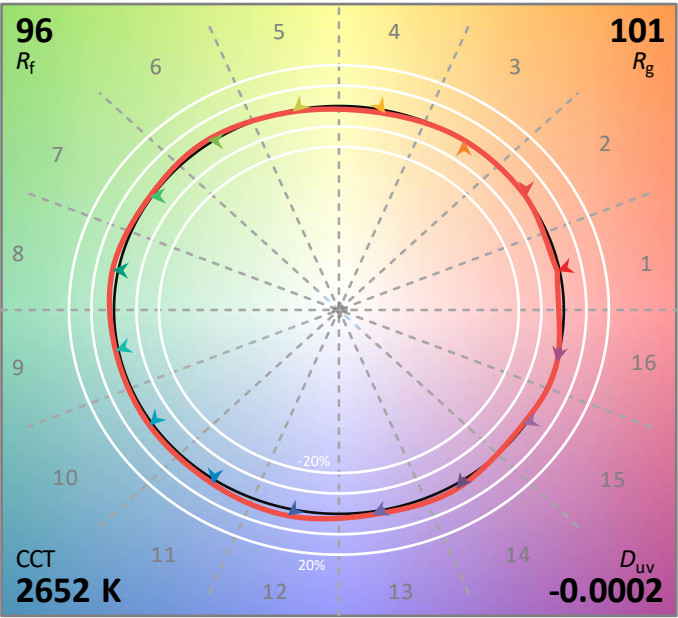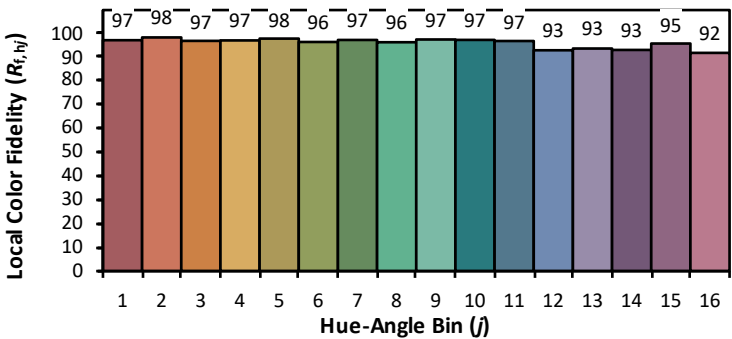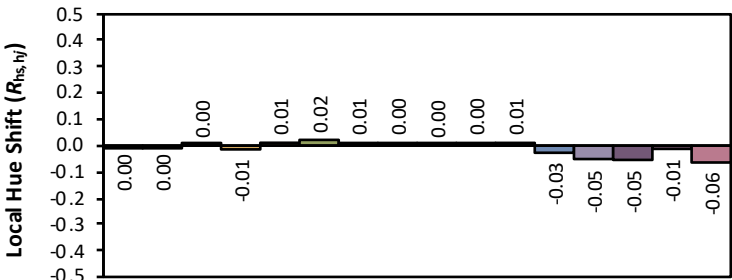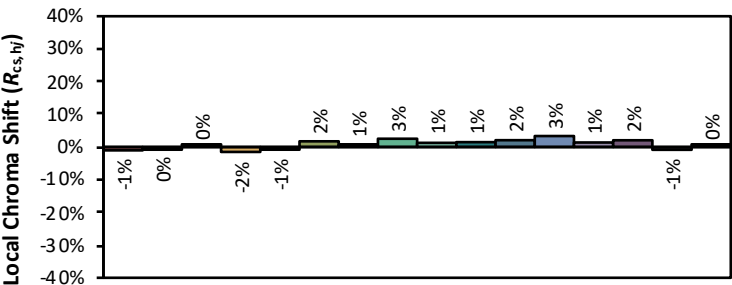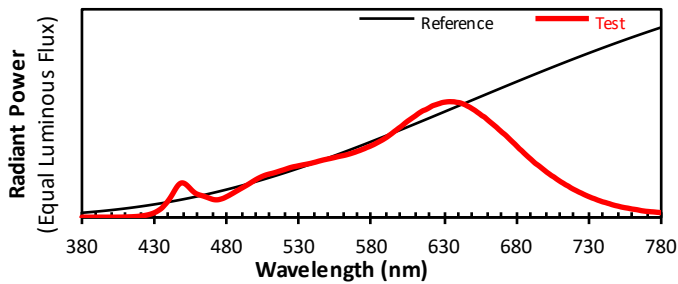

Notes: This is a recommended method for displaying ANSI/IES TM-30-18 information.

x 0.4635
y 0.4108
u' 0.2647
v' 0.5280

CIE 13.3-1995	
(CRI)	
R _a	97
R ₉	89