



Tiefste CCT

Brand	Nanlite Pavotubes 15x ii
Lux	310.06
CCT	2712.00
DUV	0.0012
CRI	97.00
CRI (Full)	96.40
TM-30 R _f	93.00
TM-30 R _g	99.00

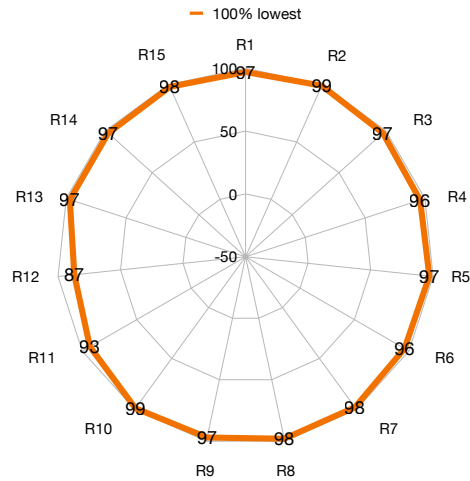


3200k

Lux	310.84
CCT	3225.00
DUV	0.0014
CRI	96.30
CRI (Full)	95.20
TM-30 R _f	94.00
TM-30 R _g	101.00
SSI	84.00

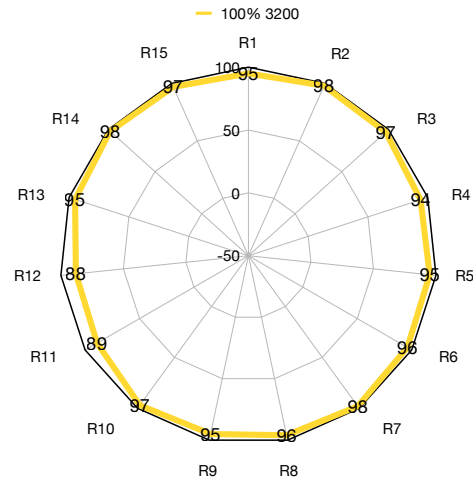

5500K

Lux	335.72
CCT	5735.00
DUV	0.0018
CRI	97.10
CRI (Full)	95.93
TM-30 R _f	94.00
TM-30 R _g	101.00
SSI	72.00

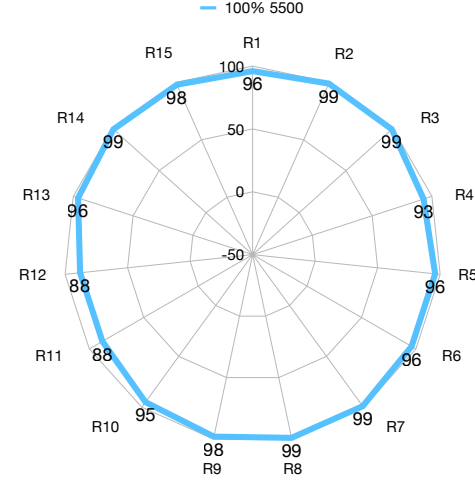

6500K

Lux	347.21
CCT	6851.00
DUV	0.0016
CRI	97.40
CRI (Full)	95.93
TM-30 R _f	95.00
TM-30 R _g	102.00

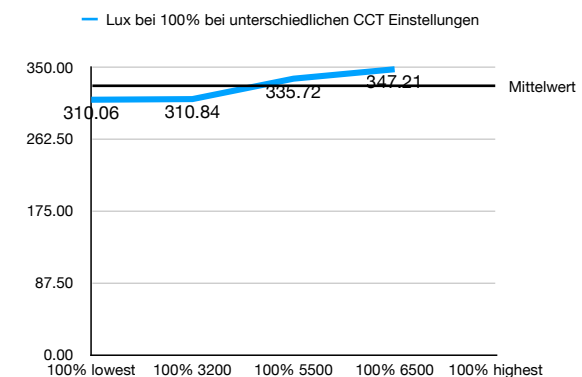
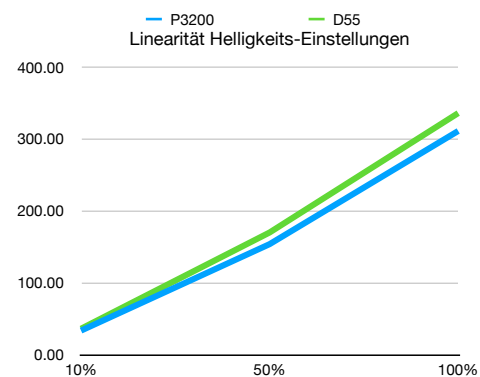
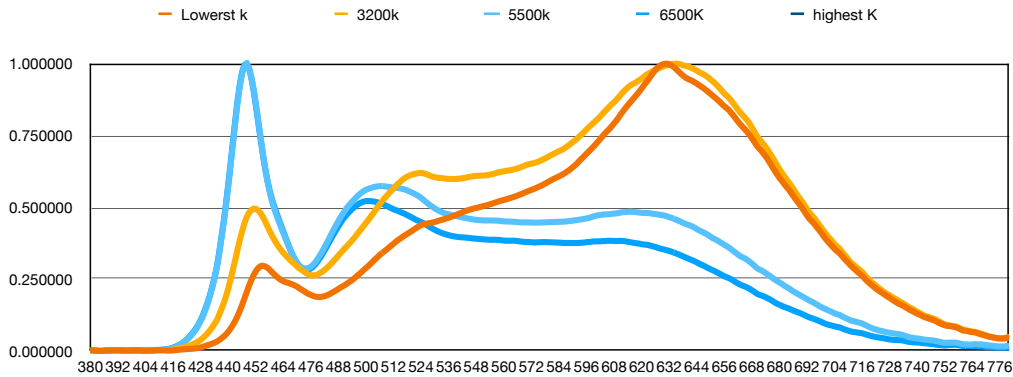
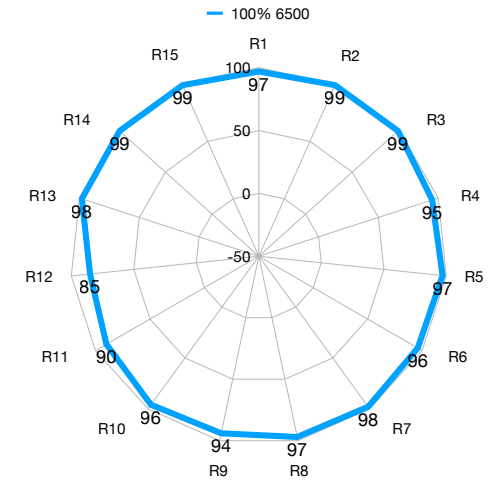


Tabelle 1

Farbtemperatur Eingestellt	Farbtemperatur gemessen	MK-1	Duv	CRI Ra	R9	CRI Re	TM30 R _f	TM30 R _g	SSI	LUX ohne Reflektor 100%	LUX 10% Leistung	LUX mit Reflektor	LUX eigentlicher % Wert bei 10% Leistung	LUX standardabweichung bei verschiedenen CCT
P3200	3225.00	2.42	0.0014	96.30	95.00	95.20	94.00	101.00	84.00	310.84	32.87		10.57%	18.59
D55	5735.00	7.45	0.0018	97.10	98.00	95.93	94.00	101.00	72.00	335.72	35.49	347.21	10.57%	
D65	6851.00	7.88	0.0016	97.40	94.00	95.93	95.00	102.00		347.21				