Nanlite FC-60B

Measurement overview | 100 % measurements and reflectors


LED EVALUATOR

Key values at maximum brightness

For each target CCT and RGB hue the highest available brightness level is shown. EV = log2(2 x lux / 5).
Duv, CRI/R9, SSI, TM-30 and TLCI are not reported for saturated RGB colours, where they are not meaningful. TLCI is for information only.

Type	Target CCT / hue	Level	Lux	EV	Measured CCT / hue	Duv	CRI Ra	R9	SSI	TM-30 Rf	TM-30 Rg	TLCI	Source
White	2700 K	100%	2406	9.91	2656 K	-0.00025	97.2	89.0	88.0	96.0	101.0	97	Nanlite FC-60B
White	3200 K	100%	2868	10.16	3344 K	-0.00602	95.5	91.0	80.0	95.0	104.0	98	Nanlite FC-60B
White	5500 K	100%	3067	10.26	5649 K	-0.00252	96.6	93.0	72.0	94.0	103.0	99	Nanlite FC-60B
White	6500 K	100%	2880	10.17	6744 K	0.00106	97.3	95.0	69.0	94.0	101.0	99	Nanlite FC-60B

White light output at 100 % across all CCTs

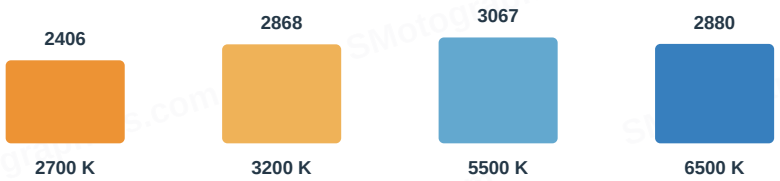

RGB output at 100 % across all colours

No values

Output with all reflectors

Reflector	Target CCT	Level	Lux	EV	Measured CCT	Duv	CRI Ra	R9	Source
Standard reflector	5500 K	100%	16909	12.72	5555 K	-0.00104	97.6	97.0	Nanlite FC-60B

© Marvin Kuhn | SMotographers.com

Nanlite FC-60B


LED Lab Report | Numbers-Import

TOTAL	COLOUR	POWER	USABILITY
83.1	78.0	98.5	72.8


Luminaire	Value	Test	Value
LED type	Bi-Color	Power	69.0 W
Test date	2026-07-29	Distance	-
Modifier	Verschiedene Setups aus dem Numbers-Rechner	Mode	Linear (current)
RGB in total	Yes	Measurements	9

Target CCT	Max Lux	Measured CCT	Duv	Ra	SSI	Rf	Rg	TLCI
2700 K	2406	2656	-0.00025	97.2	88.0	96.0	101.0	97
3200 K	2868	3344	-0.00602	95.5	80.0	95.0	104.0	98
5500 K	3067	5649	-0.00252	96.6	72.0	94.0	103.0	99
6500 K	2880	6744	0.00106	97.3	69.0	94.0	101.0	99

Output across CCTs and levels

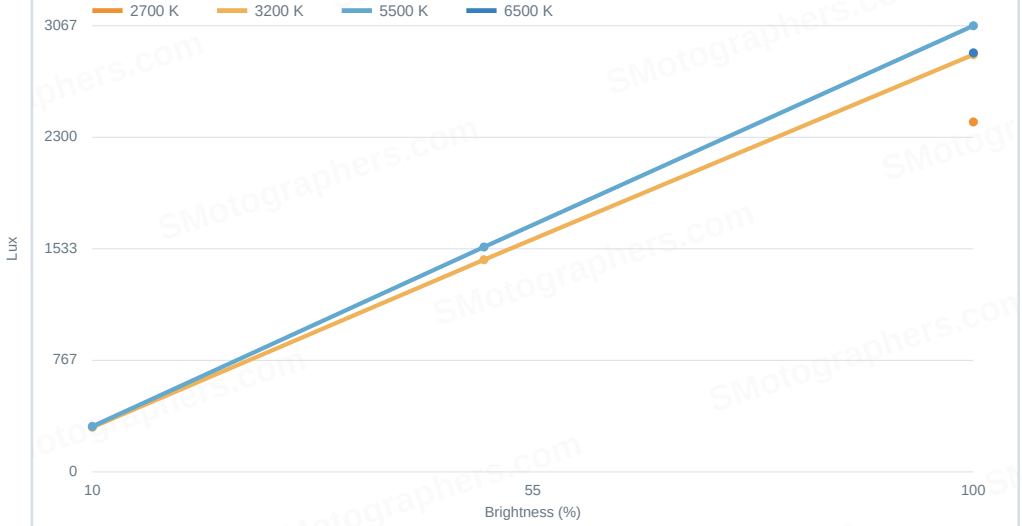

Spectrum at maximum brightness

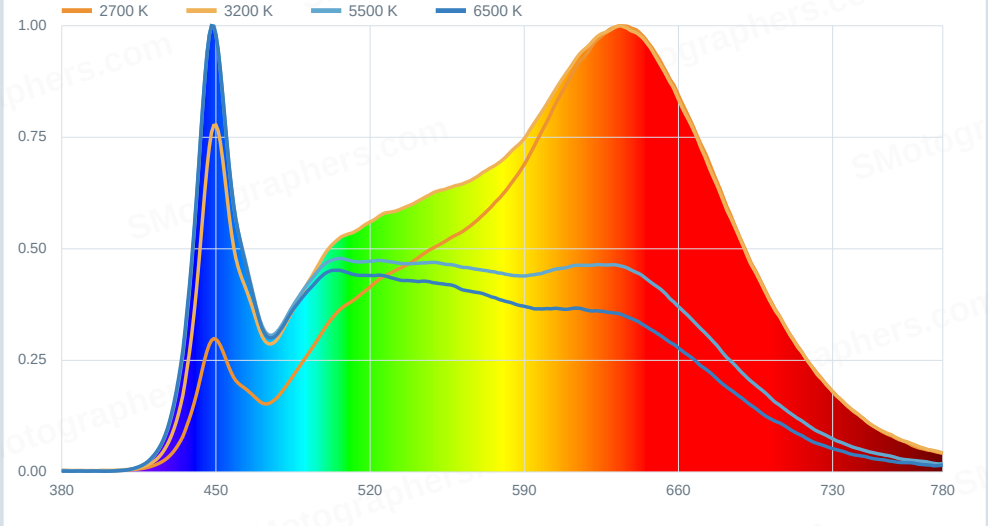

© Marvin Kuhn | SMotographers.com

Nanlite FC-60B

White light detail | Target CCT 2700 K

Level	Lux	Measured CCT	Duv	SDCM	Ra	R9	Peak
100%	2406	2656 K	-0.00025	3.06	97.2	89.0	634 nm


Colour metric	Value
SSI	88
TM-30 Rf	96
TM-30 Rg	101
TLCI (Info)	97
Measurements	1

Check	Value
Brightest level	100%
CCT deviation	-44 K
Mired deviation	6.14
Source	Nanlite FC-60B


Output linearity



CRI R1-R15 at brightest level

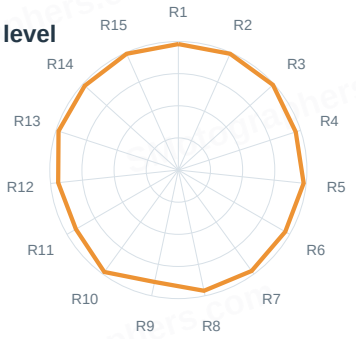

Spectra of all brightness levels

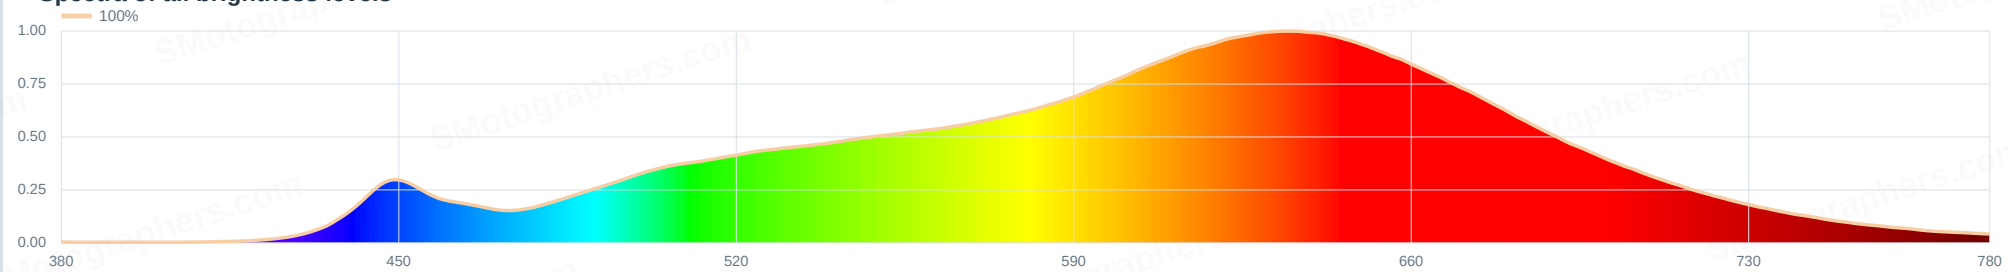

© Marvin Kuhn | SMotographers.com


Nanlite FC-60B

ANSI/IES TM-30 colour rendition | Target CCT 2700 K

LED EVALUATOR


TM-30 RF	TM-30 RG	SSI [P2650]	CCT (TM-30)	DUV	TLCI (INFO)	MEASUREMENT
96	101	88	2655 K	-0.0003	97	100 %

Color Vector Graphic

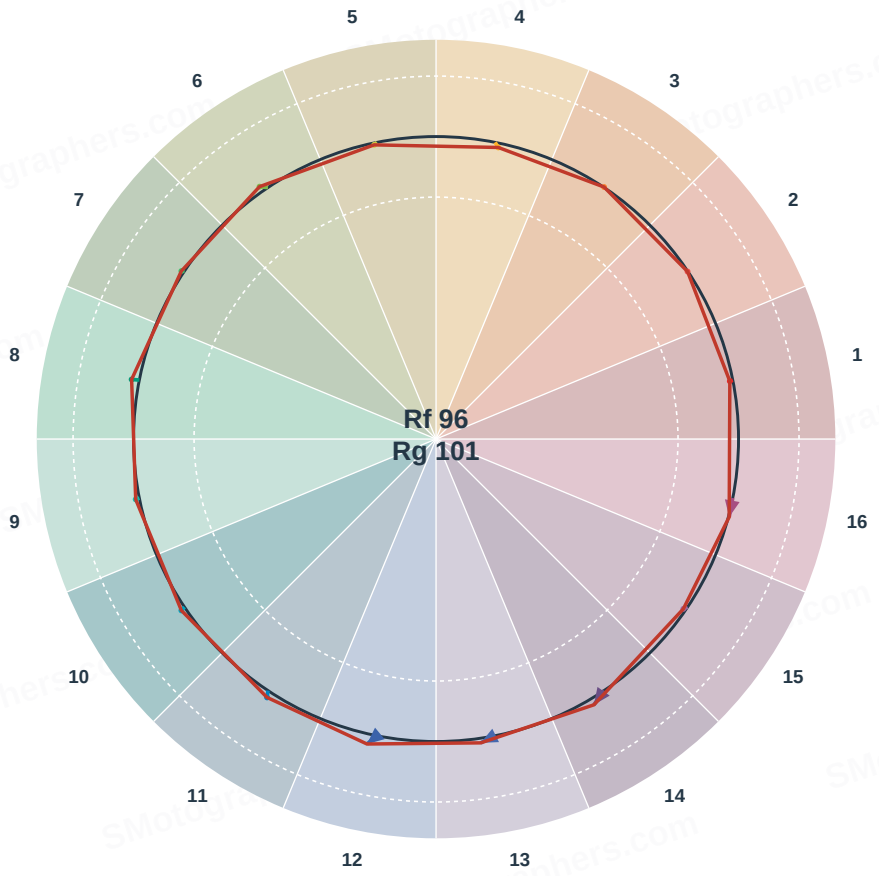


Circle = reference, arrows = shift of the test source per hue bin (CAM02-UCS).


Local chroma shift Rcs,hj

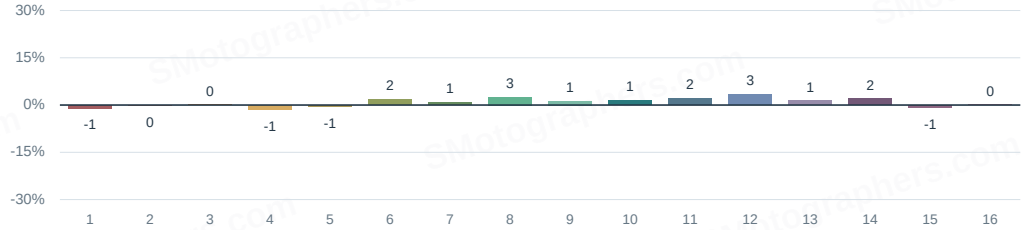

Local hue shift Rhs,hj

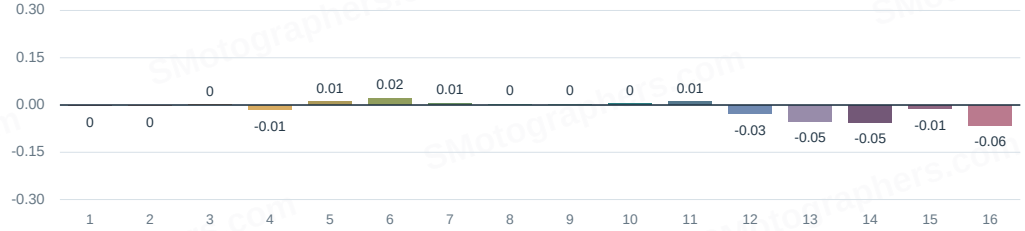

Local colour fidelity Rf,hj

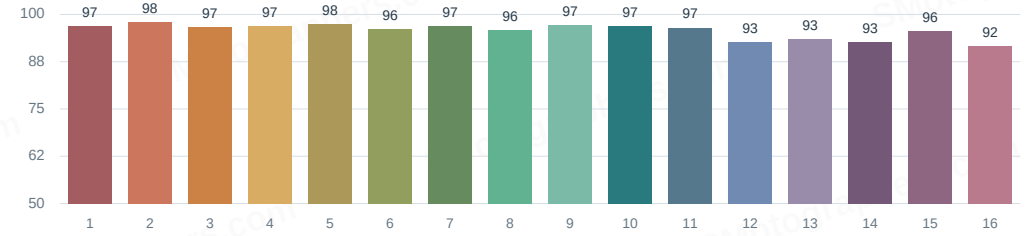

© Marvin Kuhn | SMotographers.com

Nanlite FC-60B

TM-30 colour swatches: reference vs. measurement | Target CCT 2700 K

LED EVALUATOR

TM-30 RF	TM-30 RG	SSI [P2650]	CCT (TM-30)	DUV	TLCI (INFO)	MEASUREMENT
96	101	88	2655 K	-0.0003	97	100 %

Hue bins 1-16: average per bin



1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
-1 % Chroma	-0 % Chroma	+0 % Chroma	-1 % Chroma	-1 % Chroma	+2 % Chroma	+1 % Chroma	+3 % Chroma	+1 % Chroma	+1 % Chroma	+2 % Chroma	+3 % Chroma	+1 % Chroma	+2 % Chroma	-1 % Chroma	+0 % Chroma

Colour samples CES 1-99 (left reference, right measurement; sorted by hue bin)

CES 1 Rf 99	CES 2 Rf 99	CES 3 Rf 93	CES 4 Rf 98	CES 5 Rf 94	CES 6 Rf 95	CES 7 Rf 98	CES 8 Rf 95	CES 9 Rf 99	CES 98 Rf 98	CES 99 Rf 97
CES 10 Rf 98	CES 11 Rf 99	CES 12 Rf 98	CES 13 Rf 98	CES 14 Rf 99	CES 15 Rf 98	CES 16 Rf 96	CES 17 Rf 96	CES 18 Rf 99	CES 19 Rf 97	CES 20 Rf 92
CES 21 Rf 97	CES 22 Rf 98	CES 23 Rf 98	CES 24 Rf 98	CES 25 Rf 97	CES 26 Rf 99	CES 27 Rf 93	CES 29 Rf 99	CES 30 Rf 97	CES 31 Rf 99	CES 33 Rf 99
CES 36 Rf 88	CES 28 Rf 99	CES 32 Rf 97	CES 34 Rf 99	CES 35 Rf 100	CES 37 Rf 97	CES 38 Rf 93	CES 39 Rf 98	CES 40 Rf 97	CES 41 Rf 97	CES 42 Rf 96
CES 43 Rf 97	CES 44 Rf 99	CES 47 Rf 92	CES 45 Rf 97	CES 46 Rf 98	CES 48 Rf 96	CES 49 Rf 96	CES 50 Rf 96	CES 51 Rf 96	CES 52 Rf 96	CES 53 Rf 96
CES 54 Rf 96	CES 55 Rf 96	CES 56 Rf 97	CES 57 Rf 98	CES 58 Rf 97	CES 59 Rf 98	CES 60 Rf 96	CES 61 Rf 97	CES 62 Rf 94	CES 64 Rf 98	CES 65 Rf 99
CES 66 Rf 98	CES 67 Rf 98	CES 68 Rf 97	CES 63 Rf 98	CES 69 Rf 96	CES 70 Rf 97	CES 71 Rf 96	CES 72 Rf 98	CES 73 Rf 94	CES 75 Rf 96	CES 74 Rf 91
CES 76 Rf 97	CES 77 Rf 90	CES 78 Rf 93	CES 79 Rf 92	CES 80 Rf 94	CES 81 Rf 86	CES 82 Rf 97	CES 83 Rf 96	CES 84 Rf 97	CES 85 Rf 87	CES 86 Rf 91
CES 87 Rf 96	CES 88 Rf 98	CES 89 Rf 91	CES 90 Rf 97	CES 91 Rf 85	CES 92 Rf 89	CES 93 Rf 94	CES 94 Rf 89	CES 95 Rf 92	CES 96 Rf 97	CES 97 Rf 96

Shown as corresponding colours in sRGB (CAM02-UCS, adapted to D65); screen and print reproduction is only an approximation.

© Marvin Kuhn | SMotographers.com


Nanlite FC-60B

TM-30 colour samples & Academy SSI | Target CCT 2700 K

LED EVALUATOR


TM-30 RF	TM-30 RG	SSI [P2650]	CCT (TM-30)	DUV	TLCI (INFO)	MEASUREMENT
96	101	88	2655 K	-0.0003	97	100 %

Fidelity per colour sample Rf,CES1-99

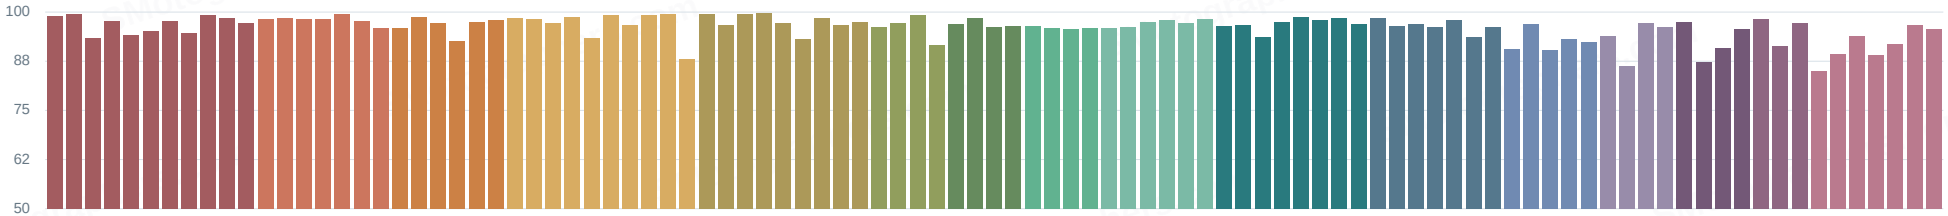


Samples sorted by hue bin 1-16; colour = hue bin.

Spectrum vs. TM-30 reference (equal area)

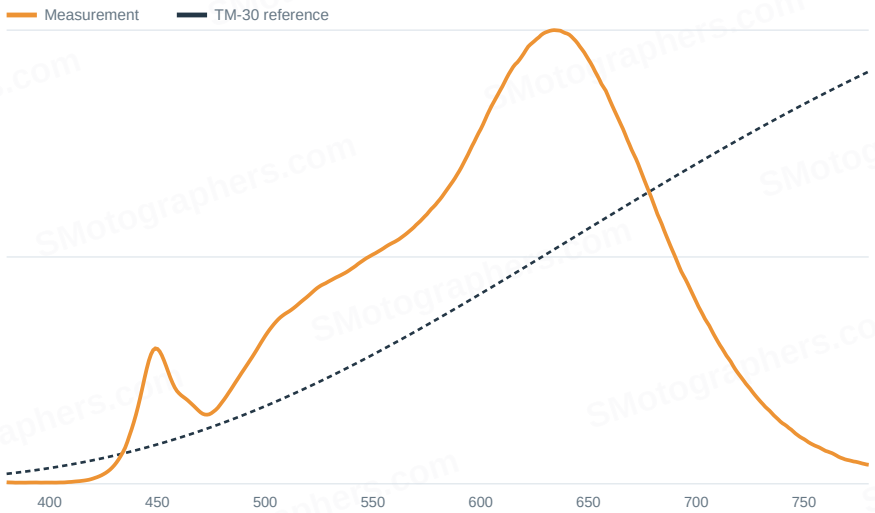

Academy SSI [P2650]

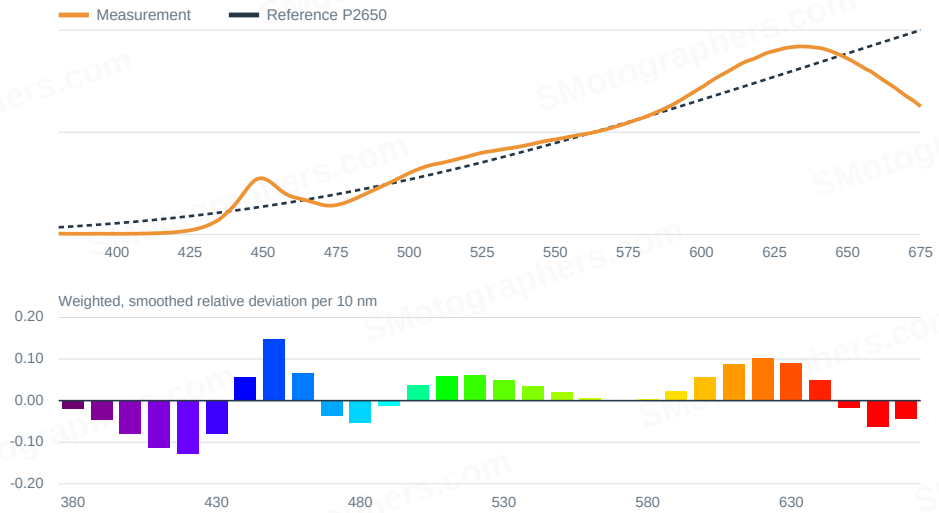

Reference as in the Academy SSI calculator (default): Planckian below 4000 K, CIE daylight from 4000 K, each at the measured CCT.

© Marvin Kuhn | SMotographers.com

Nanlite FC-60B


White light detail | Target CCT 3200 K

Level	Lux	Measured CCT	Duv	SDCM	Ra	R9	Peak
10%	307	3235 K	-0.00664	9.17	94.5	90.0	633 nm
50%	1458	3311 K	-0.00600	7.61	95.2	91.0	634 nm
100%	2868	3344 K	-0.00602	7.31	95.5	91.0	633 nm


Colour metric	Value
SSI	80
TM-30 Rf	95
TM-30 Rg	104
TLCI (Info)	98
Measurements	3

Check	Value
Brightest level	100%
CCT deviation	144 K
Mired deviation	13.46
Source	Nanlite FC-60B


Output linearity

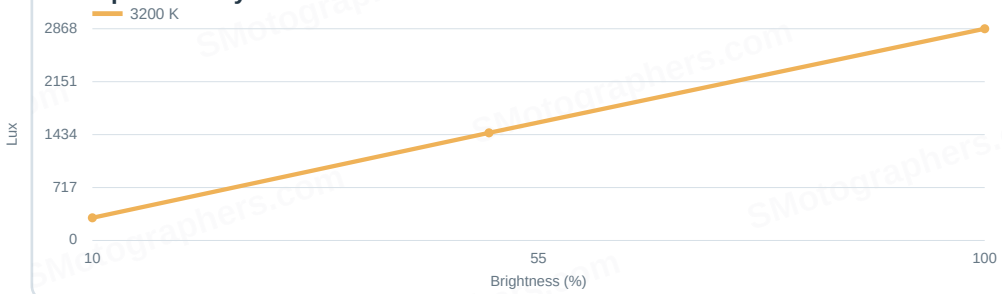

CRI R1-R15 at brightest level

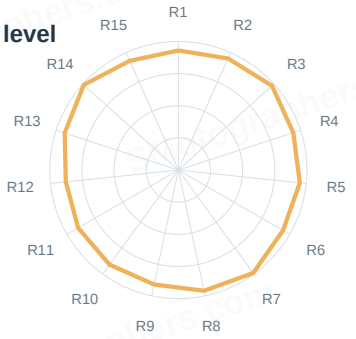

Spectra of all brightness levels

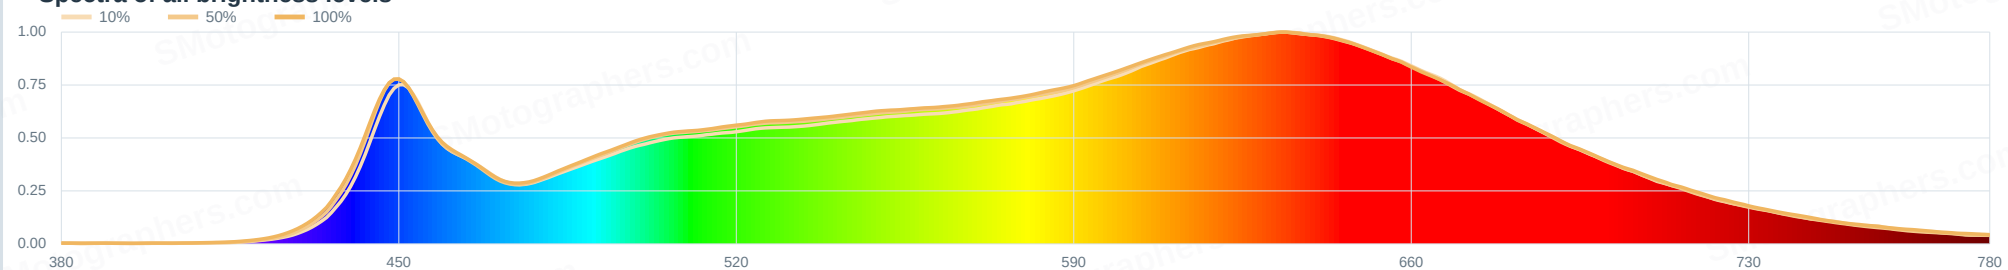

© Marvin Kuhn | SMotographers.com


Nanlite FC-60B

ANSI/IES TM-30 colour rendition | Target CCT 3200 K

LED EVALUATOR


TM-30 RF	TM-30 RG	SSI [P3350]	CCT (TM-30)	DUV	TLCI (INFO)	MEASUREMENT
95	104	80	3336 K	-0.0061	98	100 %

Color Vector Graphic

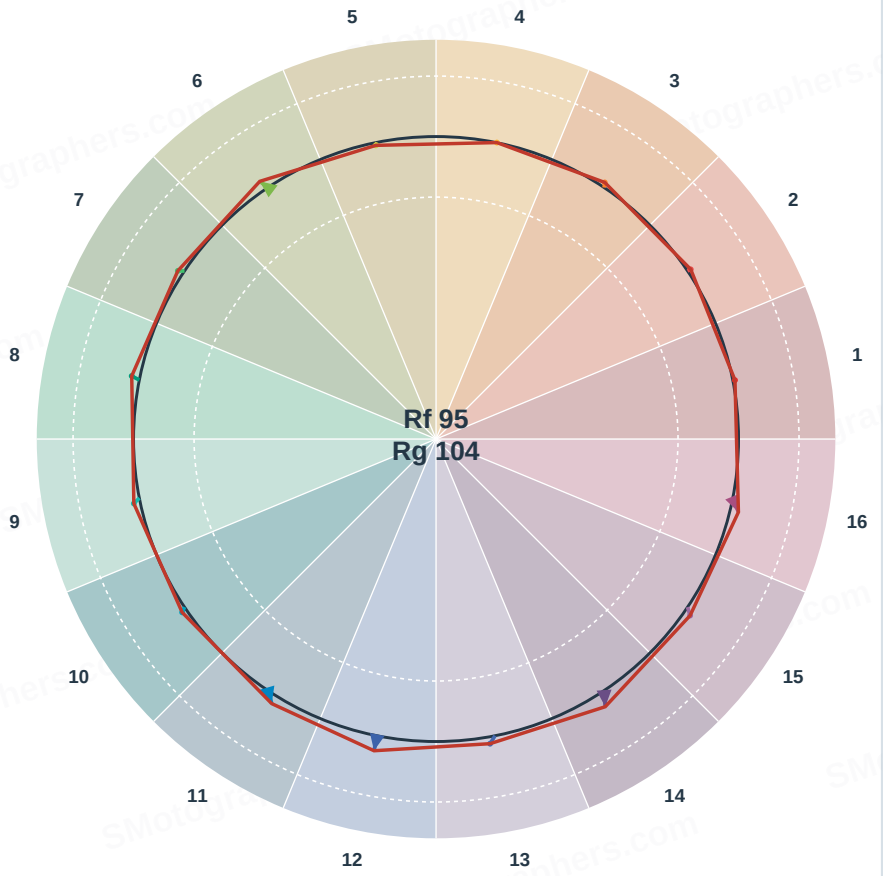


Circle = reference, arrows = shift of the test source per hue bin (CAM02-UCS).


Local chroma shift Rcs,hj

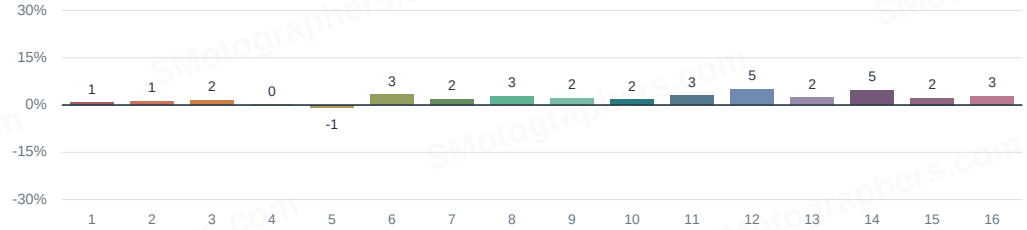

Local hue shift Rhs,hj

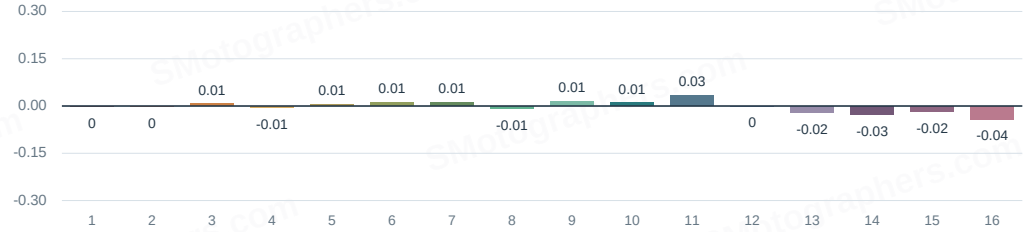

Local colour fidelity Rf,hj

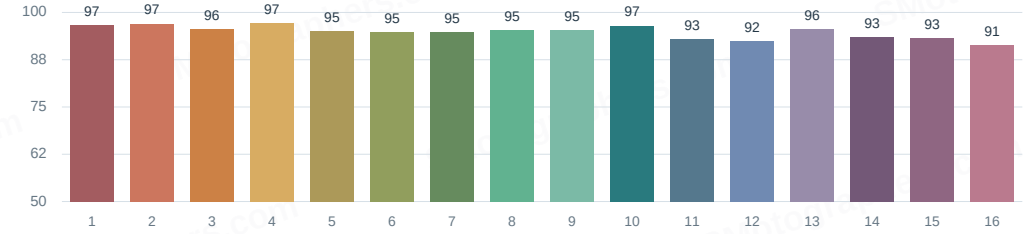

© Marvin Kuhn | SMotographers.com

Nanlite FC-60B

TM-30 colour swatches: reference vs. measurement | Target CCT 3200 K

LED EVALUATOR

TM-30 RF	TM-30 RG	SSI [P3350]	CCT (TM-30)	DUV	TLCI (INFO)	MEASUREMENT
95	104	80	3336 K	-0.0061	98	100 %

Hue bins 1-16: average per bin



1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
+1 % Chroma	+1 % Chroma	+2 % Chroma	+0 % Chroma	-1 % Chroma	+3 % Chroma	+2 % Chroma	+3 % Chroma	+2 % Chroma	+2 % Chroma	+3 % Chroma	+5 % Chroma	+2 % Chroma	+5 % Chroma	+2 % Chroma	+3 % Chroma

Colour samples CES 1-99 (left reference, right measurement; sorted by hue bin)

CES 1 Rf 98	CES 2 Rf 97	CES 3 Rf 91	CES 4 Rf 97	CES 5 Rf 95	CES 6 Rf 98	CES 7 Rf 96	CES 8 Rf 98	CES 9 Rf 99	CES 10 Rf 96	CES 11 Rf 98	CES 12 Rf 96	CES 13 Rf 96	CES 14 Rf 99	CES 15 Rf 96	CES 16 Rf 99	CES 17 Rf 98	CES 18 Rf 98	CES 19 Rf 98	CES 20 Rf 85
CES 21 Rf 97	CES 22 Rf 97	CES 23 Rf 99	CES 24 Rf 98	CES 25 Rf 97	CES 26 Rf 98	CES 27 Rf 92	CES 28 Rf 99	CES 29 Rf 98	CES 30 Rf 96	CES 31 Rf 98	CES 32 Rf 95	CES 33 Rf 98	CES 34 Rf 96	CES 35 Rf 98	CES 36 Rf 83	CES 37 Rf 97	CES 38 Rf 91	CES 39 Rf 99	CES 40 Rf 97
CES 41 Rf 99	CES 42 Rf 94	CES 43 Rf 91	CES 44 Rf 100	CES 45 Rf 94	CES 46 Rf 96	CES 47 Rf 94	CES 48 Rf 94	CES 49 Rf 94	CES 50 Rf 96	CES 51 Rf 97	CES 52 Rf 95	CES 53 Rf 94	CES 54 Rf 94	CES 55 Rf 94	CES 56 Rf 96	CES 57 Rf 96	CES 58 Rf 96	CES 59 Rf 98	CES 60 Rf 95
CES 61 Rf 95	CES 62 Rf 91	CES 63 Rf 98	CES 64 Rf 97	CES 65 Rf 98	CES 66 Rf 98	CES 67 Rf 98	CES 68 Rf 94	CES 69 Rf 94	CES 70 Rf 94	CES 71 Rf 92	CES 72 Rf 96	CES 73 Rf 89	CES 75 Rf 92	CES 76 Rf 94	CES 74 Rf 93	CES 77 Rf 92	CES 78 Rf 88	CES 79 Rf 96	CES 80 Rf 95
CES 81 Rf 93	CES 82 Rf 97	CES 83 Rf 97	CES 84 Rf 96	CES 85 Rf 87	CES 86 Rf 97	CES 87 Rf 94	CES 88 Rf 97	CES 89 Rf 93	CES 90 Rf 95	CES 92 Rf 89	CES 93 Rf 93	CES 91 Rf 77	CES 94 Rf 92	CES 95 Rf 89	CES 96 Rf 95	CES 97 Rf 94	CES 98 Rf 97	CES 99 Rf 95	

Shown as corresponding colours in sRGB (CAM02-UCS, adapted to D65); screen and print reproduction is only an approximation.

© Marvin Kuhn | SMotographers.com


Nanlite FC-60B

TM-30 colour samples & Academy SSI | Target CCT 3200 K

LED EVALUATOR


TM-30 RF	TM-30 RG	SSI [P3350]	CCT (TM-30)	DUV	TLCI (INFO)	MEASUREMENT
95	104	80	3336 K	-0.0061	98	100 %

Fidelity per colour sample Rf,CES1-99

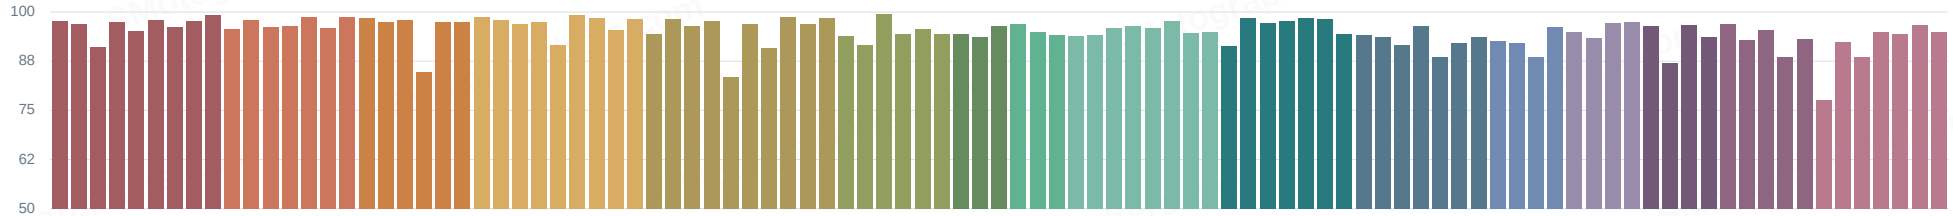


Samples sorted by hue bin 1-16; colour = hue bin.

Spectrum vs. TM-30 reference (equal area)

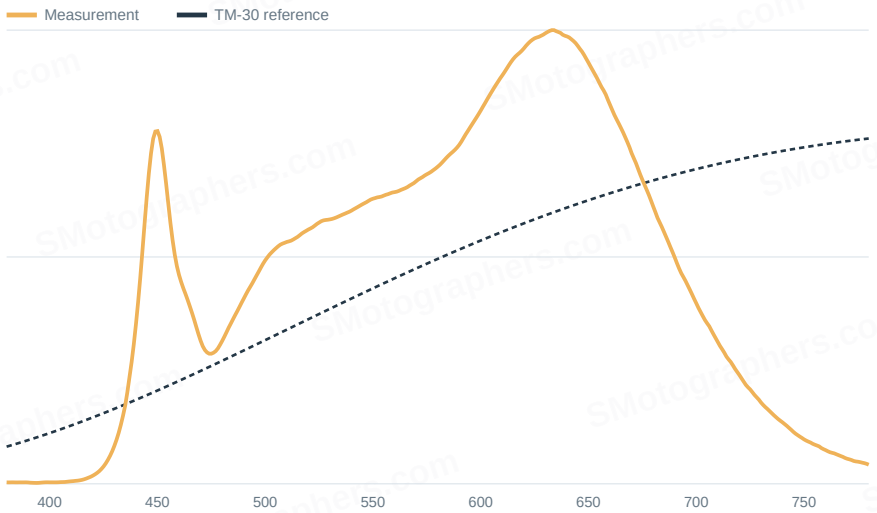

Academy SSI [P3350]

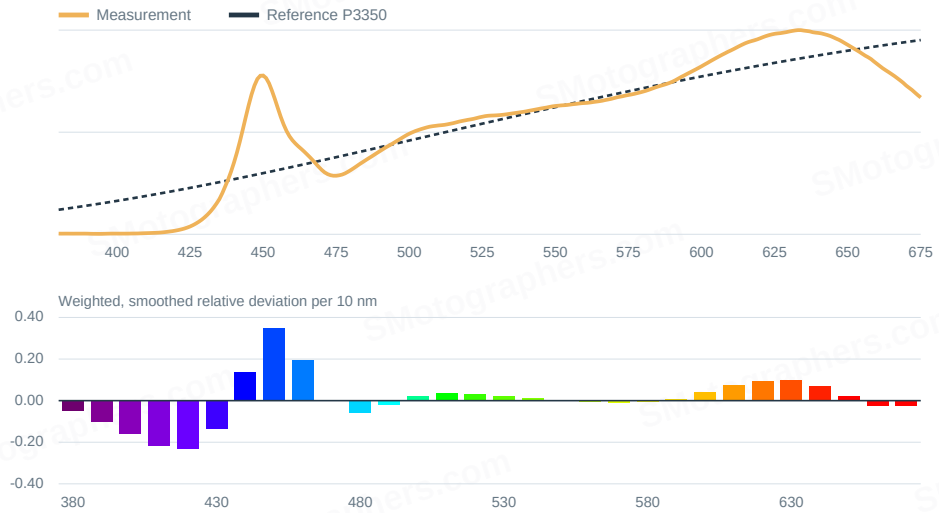

Reference as in the Academy SSI calculator (default): Planckian below 4000 K, CIE daylight from 4000 K, each at the measured CCT.

© Marvin Kuhn | SMotographers.com

Nanlite FC-60B


White light detail | Target CCT 5500 K

Level	Lux	Measured CCT	Duv	SDCM	Ra	R9	Peak
10%	313	5718 K	-0.00298	6.48	96.2	87.0	450 nm
50%	1546	5643 K	-0.00256	5.95	96.6	90.0	449 nm
100%	3067	5649 K	-0.00252	5.88	96.6	93.0	449 nm


Colour metric	Value
SSI	72
TM-30 Rf	94
TM-30 Rg	103
TLCI (Info)	99
Measurements	3

Check	Value
Brightest level	100%
CCT deviation	149 K
Mired deviation	4.80
Source	Nanlite FC-60B


Output linearity

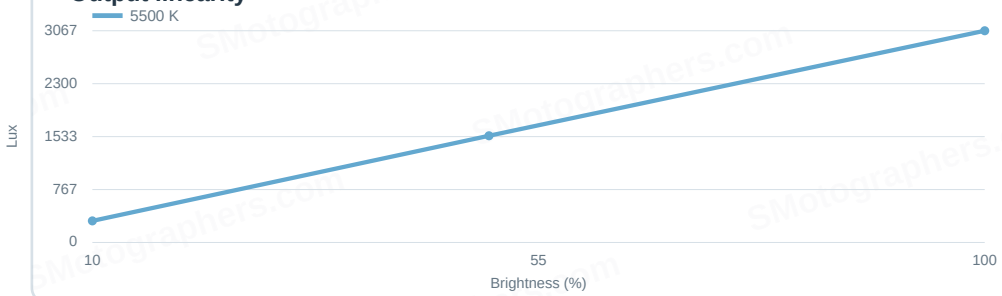

CRI R1-R15 at brightest level

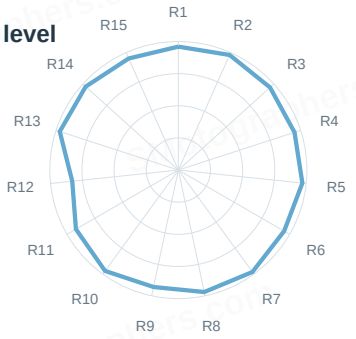

Spectra of all brightness levels

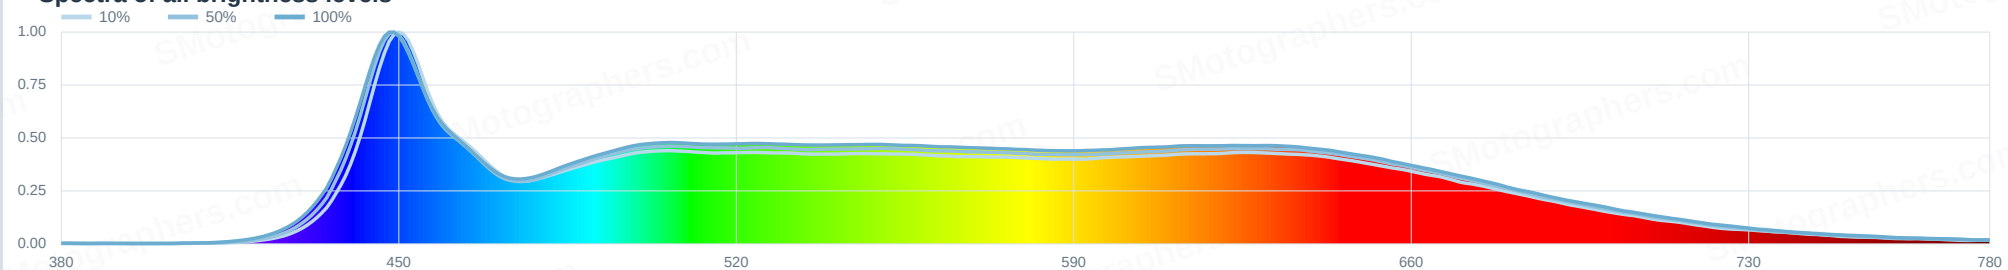

© Marvin Kuhn | SMotographers.com


Nanlite FC-60B

ANSI/IES TM-30 colour rendition | Target CCT 5500 K

LED EVALUATOR


TM-30 RF	TM-30 RG	SSI [D5652]	CCT (TM-30)	DUV	TLCI (INFO)	MEASUREMENT
94	103	72	5651 K	-0.0025	99	100 %

Color Vector Graphic

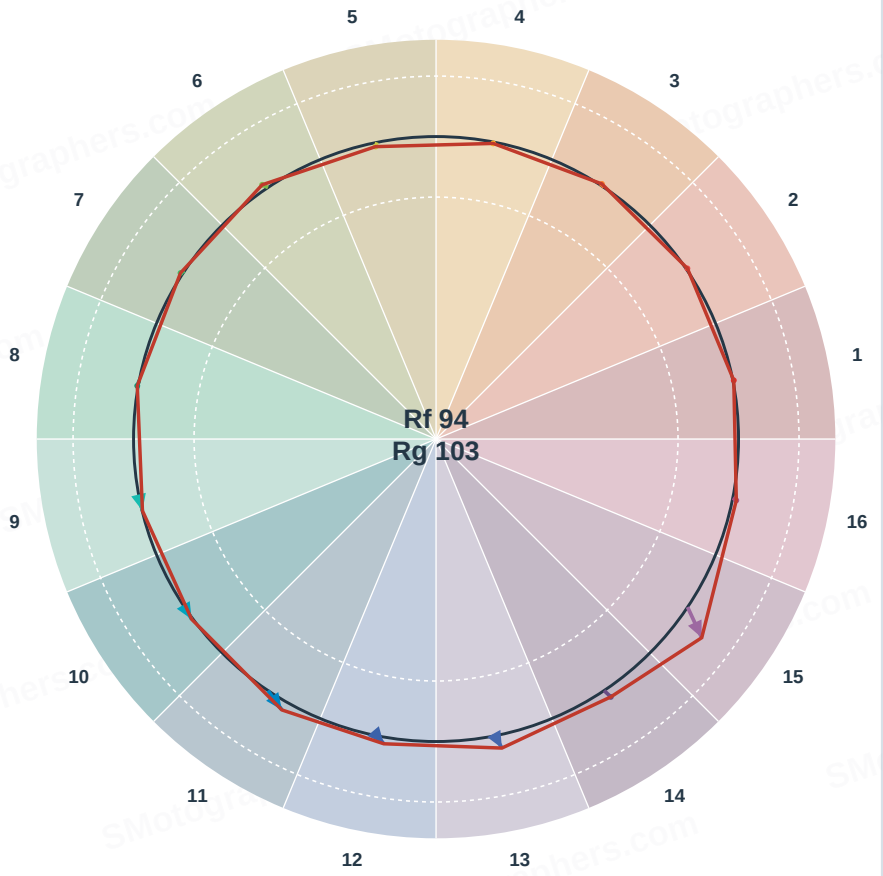


Circle = reference, arrows = shift of the test source per hue bin (CAM02-UCS).


Local chroma shift Rcs,hj

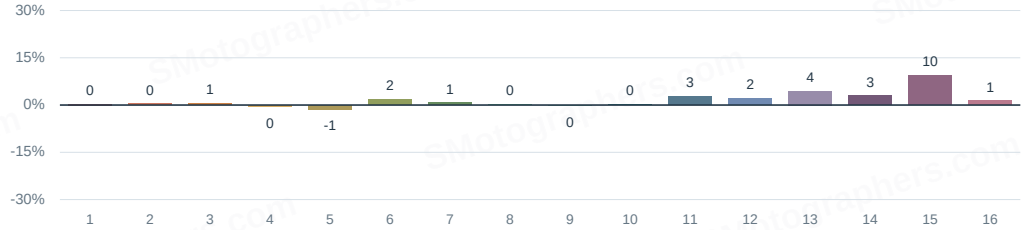

Local hue shift Rhs,hj

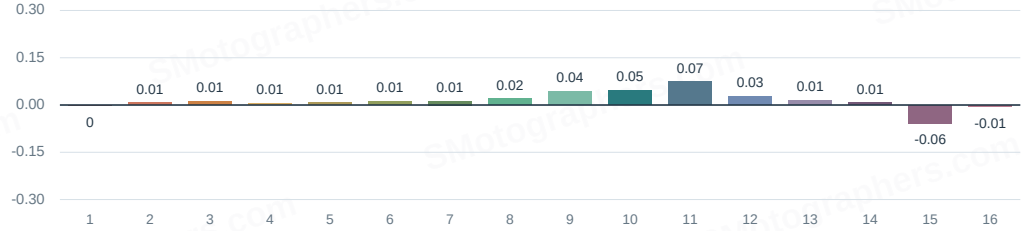

Local colour fidelity Rf,hj

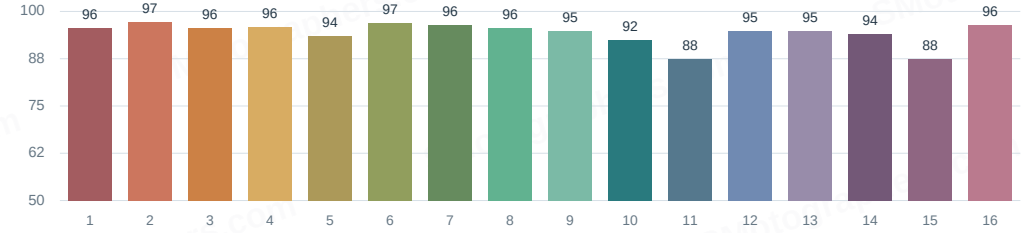

© Marvin Kuhn | SMotographers.com

Nanlite FC-60B

TM-30 colour swatches: reference vs. measurement | Target CCT 5500 K

LED EVALUATOR

TM-30 RF	TM-30 RG	SSI [D5652]	CCT (TM-30)	DUV	TLCI (INFO)	MEASUREMENT
94	103	72	5651 K	-0.0025	99	100 %

Hue bins 1-16: average per bin



1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
+0 % Chroma	+0 % Chroma	+1 % Chroma	-0 % Chroma	-1 % Chroma	+2 % Chroma	+1 % Chroma	+0 % Chroma	-0 % Chroma	+0 % Chroma	+3 % Chroma	+2 % Chroma	+4 % Chroma	+3 % Chroma	+10 % Chroma	+1 % Chroma

Colour samples CES 1-99 (left reference, right measurement; sorted by hue bin)

CES 2 Rf 98	CES 3 Rf 87	CES 4 Rf 97	CES 5 Rf 94	CES 6 Rf 98	CES 7 Rf 97	CES 8 Rf 98	CES 9 Rf 98	CES 10 Rf 95	CES 11 Rf 97	CES 12 Rf 96	CES 13 Rf 98	CES 14 Rf 99	CES 15 Rf 95	CES 16 Rf 99	CES 17 Rf 97	CES 18 Rf 98	CES 19 Rf 96	CES 20 Rf 86	CES 21 Rf 96	CES 22 Rf 97	CES 23 Rf 99	CES 24 Rf 96	CES 25 Rf 95	CES 26 Rf 96
CES 27 Rf 91	CES 28 Rf 98	CES 29 Rf 98	CES 30 Rf 95	CES 31 Rf 98	CES 32 Rf 94	CES 33 Rf 98	CES 34 Rf 95	CES 35 Rf 96	CES 36 Rf 81	CES 37 Rf 96	CES 38 Rf 90	CES 39 Rf 100	CES 40 Rf 98	CES 41 Rf 98	CES 42 Rf 93	CES 43 Rf 92	CES 44 Rf 100	CES 45 Rf 95	CES 46 Rf 97	CES 47 Rf 98	CES 48 Rf 94	CES 49 Rf 96	CES 50 Rf 98	CES 51 Rf 98
CES 52 Rf 97	CES 53 Rf 97	CES 54 Rf 94	CES 55 Rf 93	CES 56 Rf 97	CES 57 Rf 97	CES 58 Rf 97	CES 59 Rf 98	CES 60 Rf 93	CES 61 Rf 93	CES 62 Rf 90	CES 63 Rf 97	CES 64 Rf 95	CES 65 Rf 95	CES 66 Rf 94	CES 67 Rf 93	CES 68 Rf 90	CES 69 Rf 90	CES 70 Rf 89	CES 71 Rf 84	CES 72 Rf 94	CES 73 Rf 82	CES 74 Rf 94	CES 75 Rf 85	CES 76 Rf 88	CES 77 Rf 88
CES 78 Rf 83	CES 79 Rf 97	CES 80 Rf 93	CES 81 Rf 97	CES 82 Rf 97	CES 83 Rf 98	CES 84 Rf 94	CES 85 Rf 86	CES 86 Rf 97	CES 87 Rf 92	CES 88 Rf 96	CES 89 Rf 94	CES 90 Rf 96	CES 91 Rf 73	CES 92 Rf 86	CES 93 Rf 92	CES 94 Rf 93	CES 95 Rf 86	CES 1 Rf 99	CES 96 Rf 94	CES 97 Rf 96	CES 98 Rf 97	CES 99 Rf 96			

Shown as corresponding colours in sRGB (CAM02-UCS, adapted to D65); screen and print reproduction is only an approximation.

© Marvin Kuhn | SMotographers.com


Nanlite FC-60B

TM-30 colour samples & Academy SSI | Target CCT 5500 K

LED EVALUATOR


TM-30 RF	TM-30 RG	SSI [D5652]	CCT (TM-30)	DUV	TLCI (INFO)	MEASUREMENT
94	103	72	5651 K	-0.0025	99	100 %

Fidelity per colour sample Rf,CES1-99

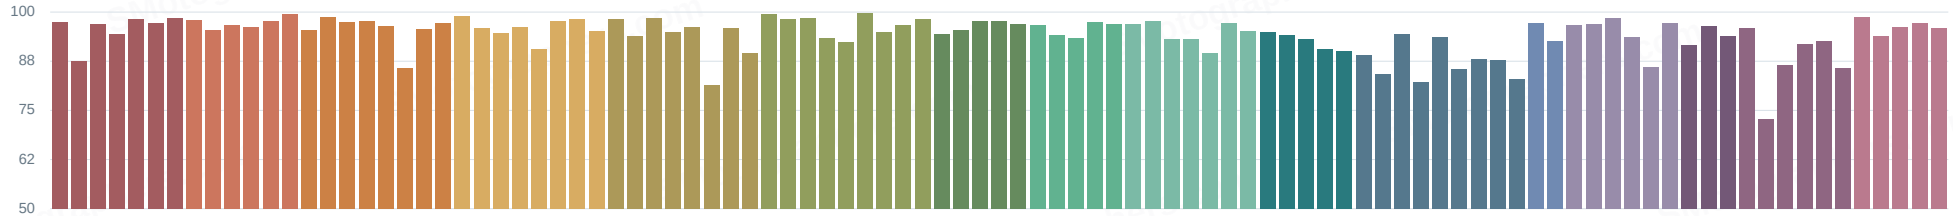


Samples sorted by hue bin 1-16; colour = hue bin.

Spectrum vs. TM-30 reference (equal area)

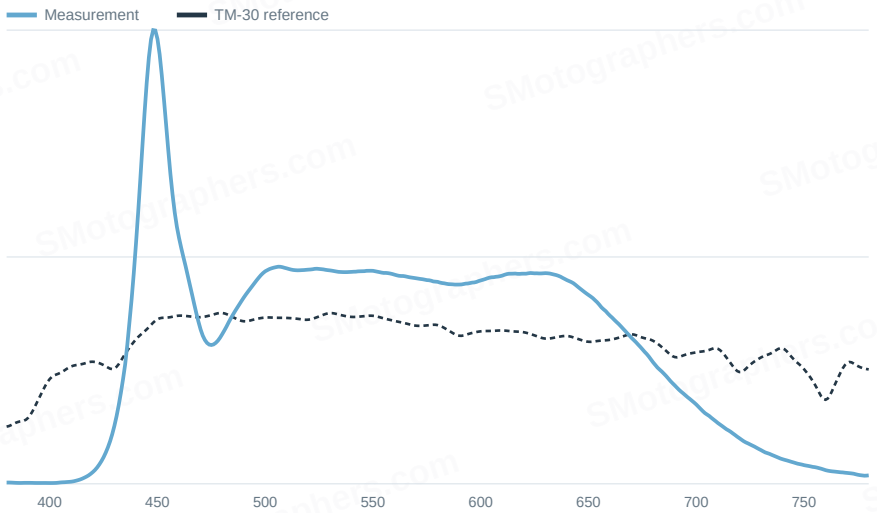

Academy SSI [D5652]

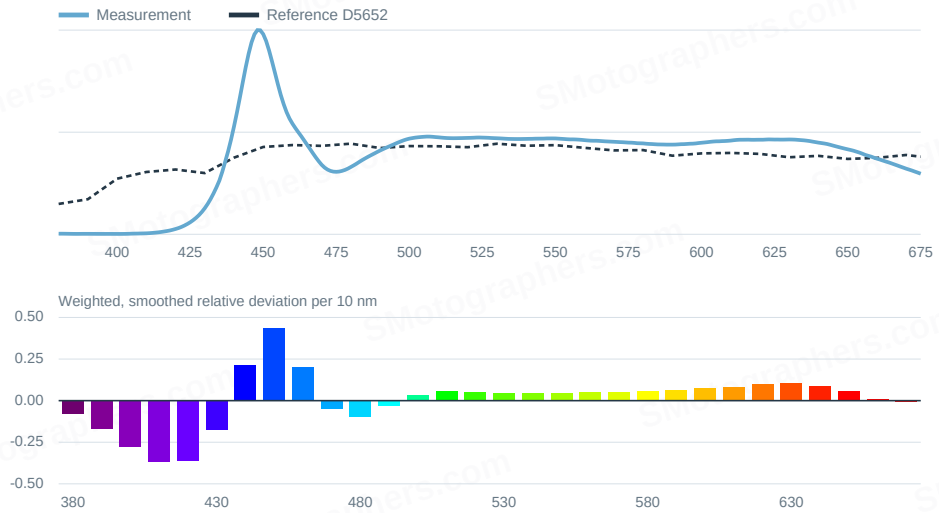

Reference as in the Academy SSI calculator (default): Planckian below 4000 K, CIE daylight from 4000 K, each at the measured CCT.

© Marvin Kuhn | SMotographers.com

Nanlite FC-60B

White light detail | Target CCT 6500 K

Level	Lux	Measured CCT	Duv	SDCM	Ra	R9	Peak
100%	2880	6744 K	0.00106	3.28	97.3	95.0	449 nm


Colour metric	Value
SSI	69
TM-30 Rf	94
TM-30 Rg	101
TLCI (Info)	99
Measurements	1

Check	Value
Brightest level	100%
CCT deviation	244 K
Mired deviation	5.57
Source	Nanlite FC-60B


Output linearity



CRI R1-R15 at brightest level

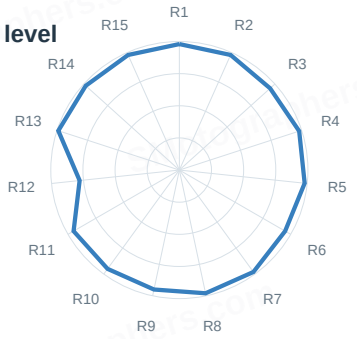

Spectra of all brightness levels

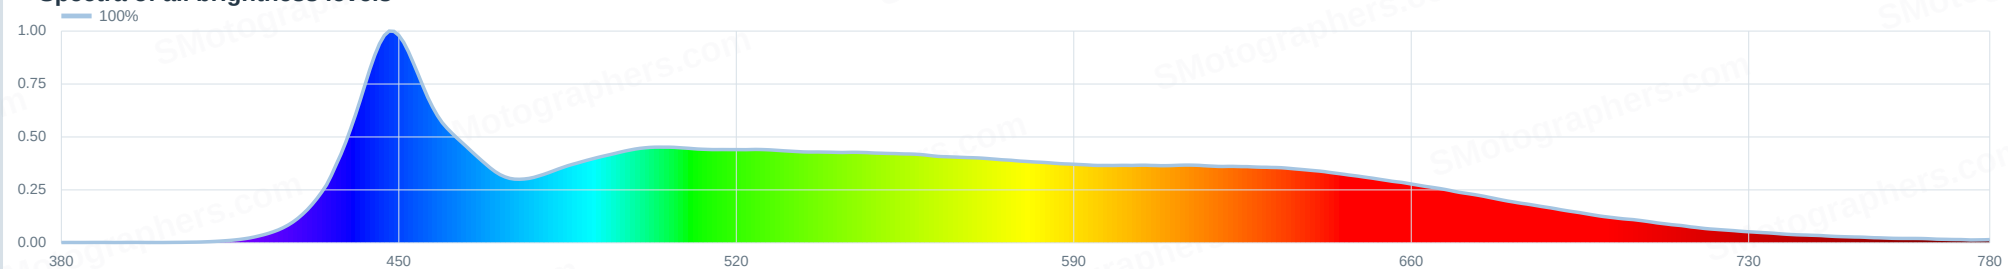

© Marvin Kuhn | SMotographers.com


Nanlite FC-60B

ANSI/IES TM-30 colour rendition | Target CCT 6500 K

LED EVALUATOR


TM-30 RF	TM-30 RG	SSI [D6740]	CCT (TM-30)	DUV	TLCI (INFO)	MEASUREMENT
94	101	69	6741 K	0.0011	99	100 %

Color Vector Graphic

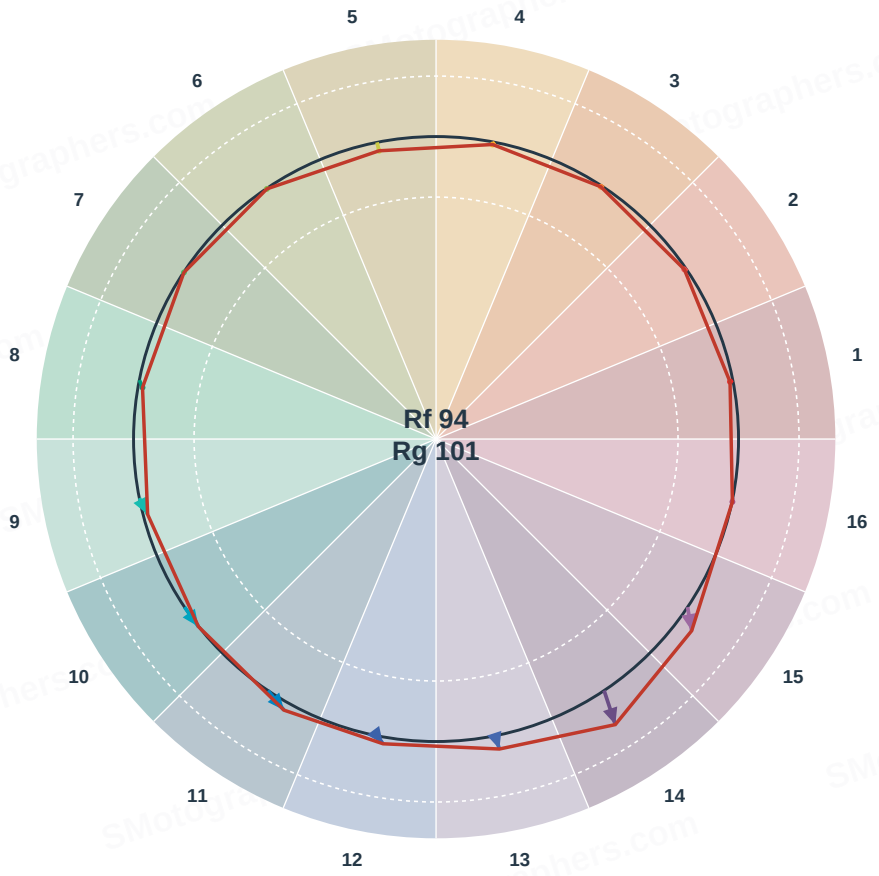


Circle = reference, arrows = shift of the test source per hue bin (CAM02-UCS).


Local chroma shift Rcs,hj

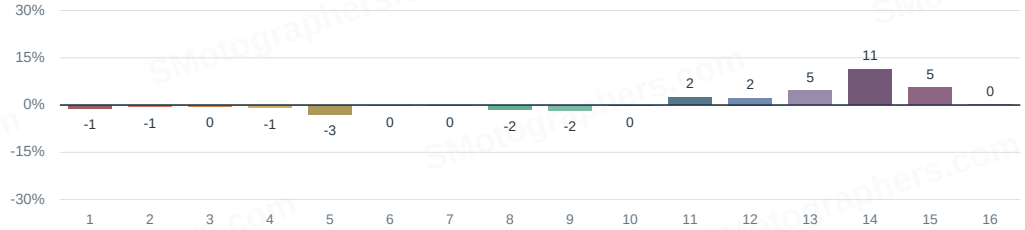

Local hue shift Rhs,hj

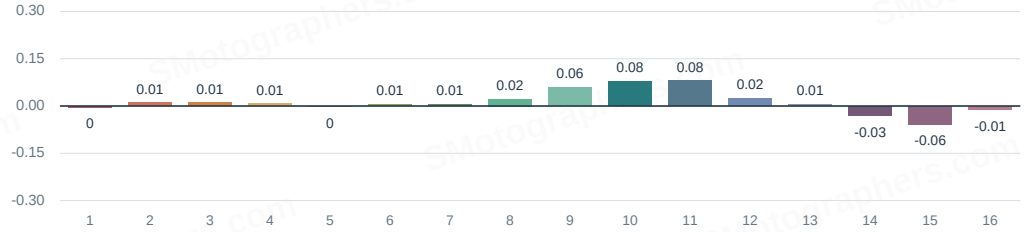

Local colour fidelity Rf,hj

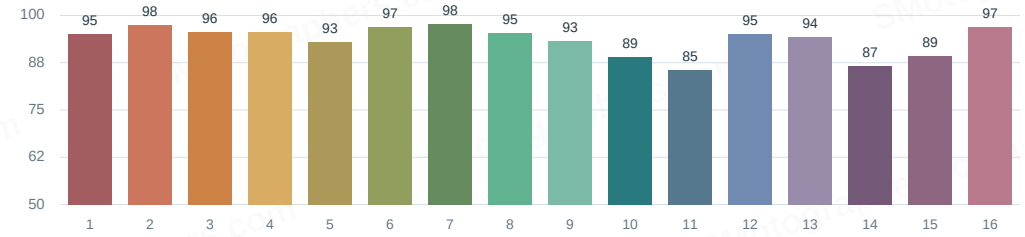

© Marvin Kuhn | SMotographers.com

Nanlite FC-60B

TM-30 colour swatches: reference vs. measurement | Target CCT 6500 K

LED EVALUATOR

TM-30 RF	TM-30 RG	SSI [D6740]	CCT (TM-30)	DUV	TLCI (INFO)	MEASUREMENT
94	101	69	6741 K	0.0011	99	100 %

Hue bins 1-16: average per bin

Reference

Measurement

Bin	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
Chroma	-1 % Chroma	-1 % Chroma	-0 % Chroma	-1 % Chroma	-3 % Chroma	-0 % Chroma	-0 % Chroma	-2 % Chroma	-2 % Chroma	-0 % Chroma	+2 % Chroma	+2 % Chroma	+5 % Chroma	+11 % Chroma	+5 % Chroma	+0 % Chroma

Colour samples CES 1-99 (left reference, right measurement; sorted by hue bin)

CES 2 Rf 98	CES 3 Rf 85	CES 4 Rf 95	CES 5 Rf 93	CES 6 Rf 97	CES 7 Rf 99	CES 8 Rf 98	CES 10 Rf 96	CES 11 Rf 97	CES 12 Rf 98	CES 13 Rf 99
CES 14 Rf 100	CES 9 Rf 98	CES 15 Rf 95	CES 16 Rf 98	CES 17 Rf 97	CES 18 Rf 87	CES 19 Rf 96	CES 20 Rf 88	CES 21 Rf 96	CES 22 Rf 98	CES 23 Rf 98
CES 24 Rf 96	CES 25 Rf 94	CES 26 Rf 97	CES 27 Rf 88	CES 28 Rf 98	CES 29 Rf 98	CES 30 Rf 92	CES 31 Rf 98	CES 32 Rf 95	CES 33 Rf 98	CES 34 Rf 96
CES 35 Rf 97	CES 36 Rf 78	CES 37 Rf 97	CES 38 Rf 86	CES 39 Rf 99	CES 40 Rf 99	CES 41 Rf 96	CES 42 Rf 95	CES 43 Rf 95	CES 44 Rf 100	CES 45 Rf 97
CES 46 Rf 99	CES 47 Rf 98	CES 48 Rf 92	CES 49 Rf 98	CES 50 Rf 98	CES 51 Rf 97	CES 52 Rf 99	CES 53 Rf 100	CES 54 Rf 93	CES 55 Rf 92	CES 56 Rf 97
CES 57 Rf 96	CES 58 Rf 96	CES 59 Rf 98	CES 60 Rf 92	CES 61 Rf 92	CES 62 Rf 87	CES 63 Rf 96	CES 64 Rf 93	CES 65 Rf 92	CES 66 Rf 91	CES 67 Rf 90
CES 68 Rf 89	CES 69 Rf 89	CES 71 Rf 80	CES 74 Rf 92	CES 70 Rf 87	CES 72 Rf 94	CES 73 Rf 80	CES 75 Rf 82	CES 76 Rf 87	CES 77 Rf 87	CES 78 Rf 82
CES 79 Rf 97	CES 80 Rf 93	CES 81 Rf 96	CES 82 Rf 97	CES 83 Rf 99	CES 84 Rf 93	CES 85 Rf 84	CES 86 Rf 97	CES 87 Rf 92	CES 88 Rf 98	CES 89 Rf 93
CES 91 Rf 68	CES 90 Rf 97	CES 92 Rf 84	CES 93 Rf 91	CES 94 Rf 91	CES 95 Rf 84	CES 1 Rf 99	CES 96 Rf 94	CES 97 Rf 96	CES 98 Rf 98	CES 99 Rf 97

Shown as corresponding colours in sRGB (CAM02-UCS, adapted to D65); screen and print reproduction is only an approximation.

© Marvin Kuhn | SMotographers.com


Nanlite FC-60B

TM-30 colour samples & Academy SSI | Target CCT 6500 K

LED EVALUATOR


TM-30 RF	TM-30 RG	SSI [D6740]	CCT (TM-30)	DUV	TLCI (INFO)	MEASUREMENT
94	101	69	6741 K	0.0011	99	100 %

Fidelity per colour sample Rf,CES1-99

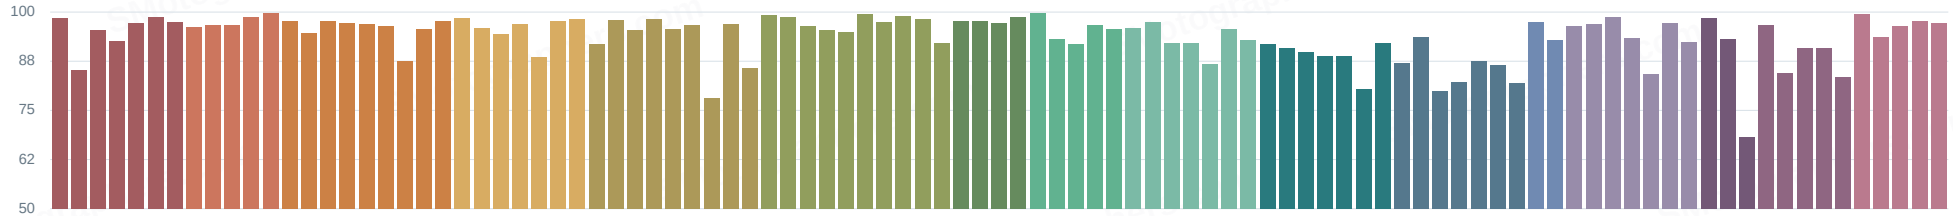


Samples sorted by hue bin 1-16; colour = hue bin.

Spectrum vs. TM-30 reference (equal area)

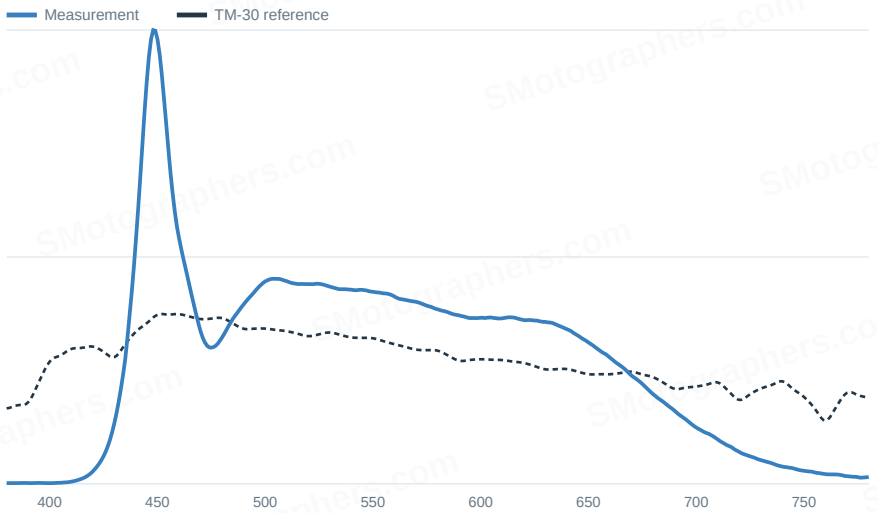

Academy SSI [D6740]

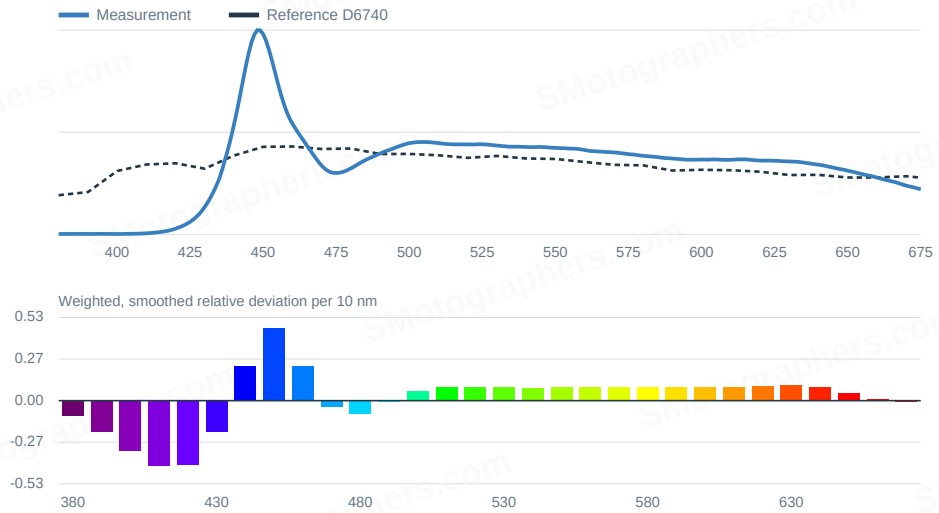

Reference as in the Academy SSI calculator (default): Planckian below 4000 K, CIE daylight from 4000 K, each at the measured CCT.


© Marvin Kuhn | SMotographers.com

Nanlite FC-60B

Reflectors | Maximum output

Reflector	Target CCT	Lux	EV	Measured CCT	Duv	Source
Standard reflector	5500 K	16909	12.72	5555 K	-0.00104	Nanlite FC-60B

Max EV per reflector

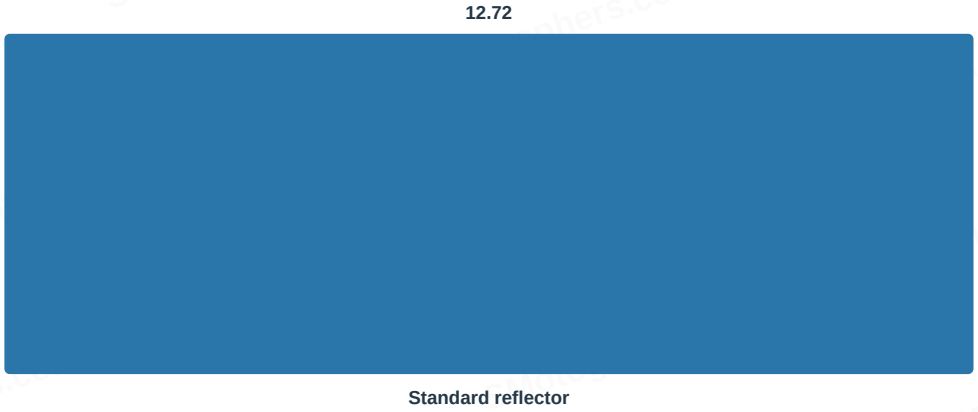

© Marvin Kuhn | SMotographers.com