



Tiefste CCT

Brand	Smallrig RF 10C
Lux	0.00
CCT	0.00
DUV	0.0000
CRI	0.00
CRI (Full)	0.00
TM-30 R _f	92.00
TM-30 R _g	100.00

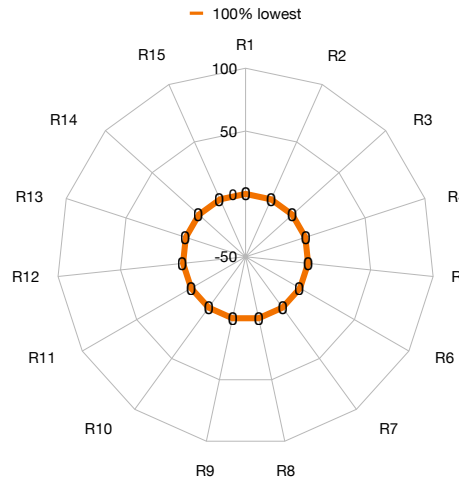


3200k

Lux	0.00
CCT	0.00
DUV	0.0000
CRI	0.00
CRI (Full)	0.00
TM-30 R _f	
TM-30 R _g	
SSI	73.00

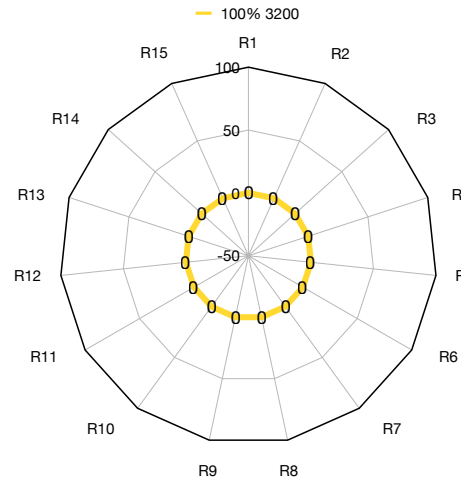




5500K

Lux	397.76
CCT	5955.00
DUV	0.0032
CRI	93.40
CRI (Full)	90.73
TM-30 R _f	
TM-30 R _g	
SSI	0.00

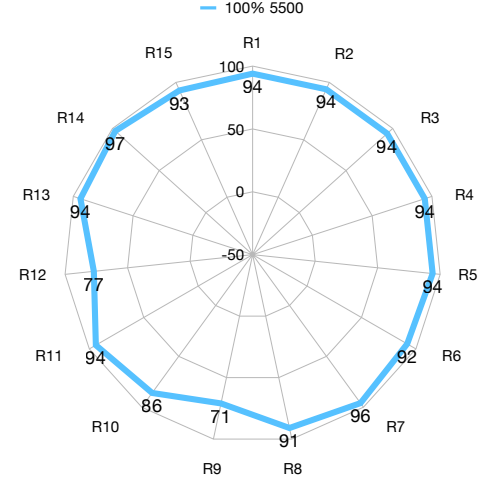

6500K

Lux	0.00
CCT	0.00
DUV	0.0000
CRI	0.00
CRI (Full)	0.00
TM-30 R _f	
TM-30 R _g	

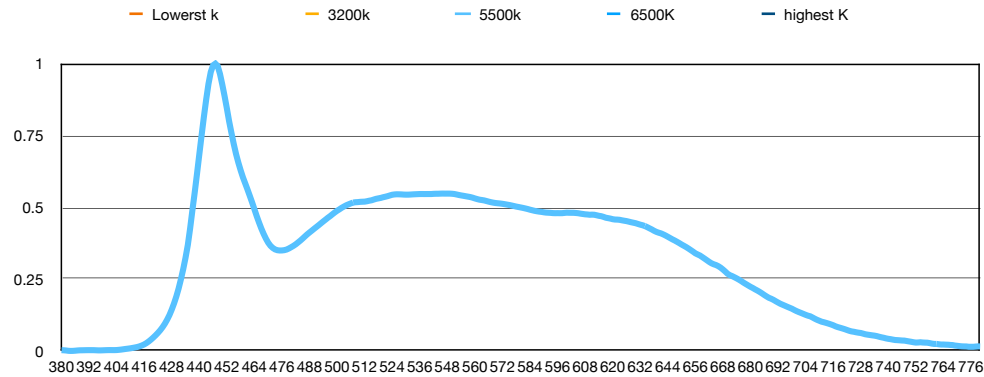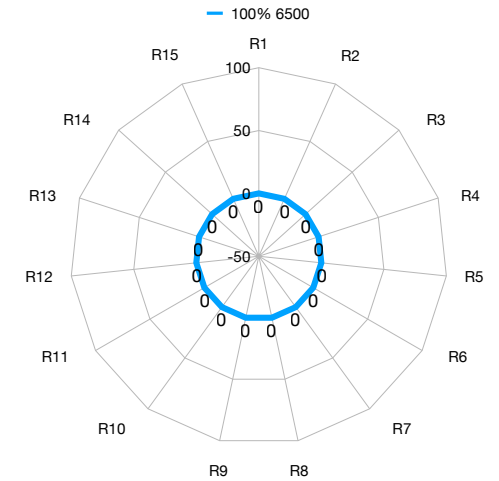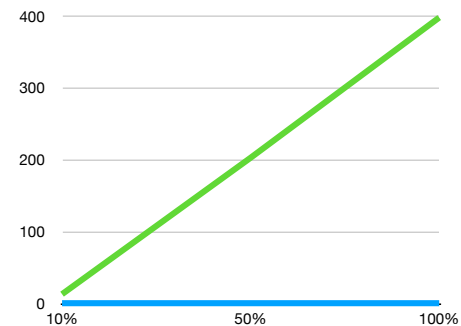
 Linearität Helligkeits-Einstellungen
 P3200 D55


Lux bei 100% bei unterschiedlichen CCT Einstellungen

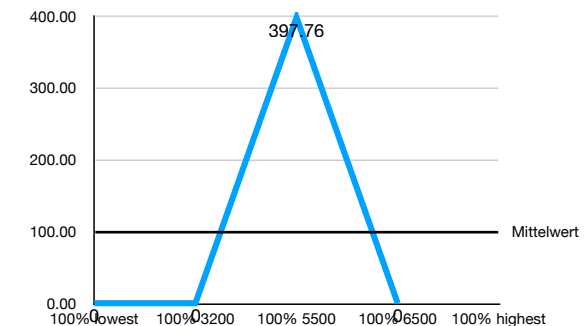


Tabelle 1

Farbtemperatur Eingestellt	Farbtemperatur gemessen	MK-1	Duv	CRI Ra	R9	CRI Re	TM30 R _f	TM30 R _g	SSI	LUX ohne Reflektor 100%	LUX 10% Leistung	LUX mit Reflektor	LUX eigentlicher % Wert bei 10% Leistung	LUX standardabweichung bei verschiedenen CCT
P3200	0.00		0.0000	0.00	0.00	0.00			73.00	0.00	0.00			229.65
D55	5955.00	13.89	0.0032	93.40	71.00	90.73			0.00	397.76	12.60	397.76	3.17%	
D65	0.00		0.0000	0.00	0.00	0.00				0.00				