Zhiyun Molus G200 Normal

Measurement overview | 100 % measurements and reflectors


LED EVALUATOR

Key values at maximum brightness

For each target CCT and RGB hue the highest available brightness level is shown. EV = log2(2 x lux / 5).
Duv, CRI/R9, SSI, TM-30 and TLCI are not reported for saturated RGB colours, where they are not meaningful. TLCI is for information only.

Type	Target CCT / hue	Level	Lux	EV	Measured CCT / hue	Duv	CRI Ra	R9	SSI	TM-30 Rf	TM-30 Rg	TLCI	Source
White	2700 K	100%	8225	11.68	2754 K	0.00348	96.9	77.0	87.0	94.0	97.0	96	Zhiyun Molus G200 Normal 100% lowe
White	3200 K	100%	8794	11.78	3247 K	-0.00209	97.6	91.0	82.0	95.0	101.0	98	Zhiyun Molus G200 Normal 100% 3200
White	5500 K	100%	9734	11.93	5569 K	-0.00176	97.5	97.0	72.0	94.0	102.0	98	Zhiyun Molus G200 Normal 100% 5500
White	6500 K	100%	9766	11.93	6567 K	0.00104	97.2	94.0	69.0	93.0	100.0	98	Zhiyun Molus G200 Normal 100% 6500

White light output at 100 % across all CCTs

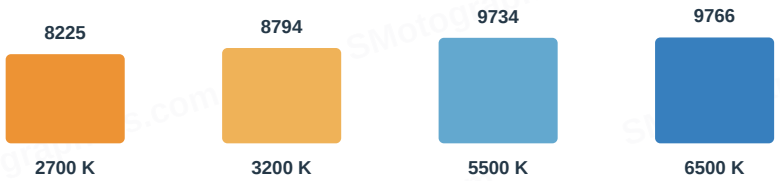

RGB output at 100 % across all colours

No values

Output with all reflectors

Reflector	Target CCT	Level	Lux	EV	Measured CCT	Duv	CRI Ra	R9	Source
Standard reflector	-	100%	62591	14.61	5681 K	-0.00150	97.5	98.0	Zhiyun Molus G200 Normal 100% max with reflector

© Marvin Kuhn | SMotographers.com

Zhiyun Molus G200 Normal


LED Lab Report | Numbers-Import

TOTAL	COLOUR	POWER	USABILITY
84.8	84.7	103.5	66.0


Luminaire	Value	Test	Value
LED type	Bi-Color	Power	200.0 W
Test date	2026-07-29	Distance	-
Modifier	Verschiedene Setups aus dem Numbers-Rechner	Mode	Linear (current)
RGB in total	Yes	Measurements	9

Target CCT	Max Lux	Measured CCT	Duv	Ra	SSI	Rf	Rg	TLCI
2700 K	8225	2754	0.00348	96.9	87.0	94.0	97.0	96
3200 K	8794	3247	-0.00209	97.6	82.0	95.0	101.0	98
5500 K	9734	5569	-0.00176	97.5	72.0	94.0	102.0	98
6500 K	9766	6567	0.00104	97.2	69.0	93.0	100.0	98

Output across CCTs and levels

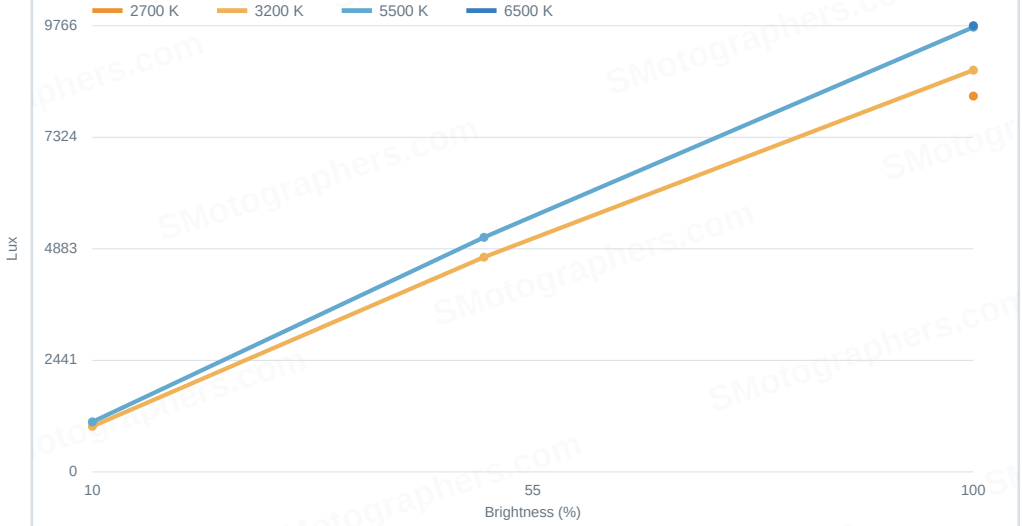

Spectrum at maximum brightness

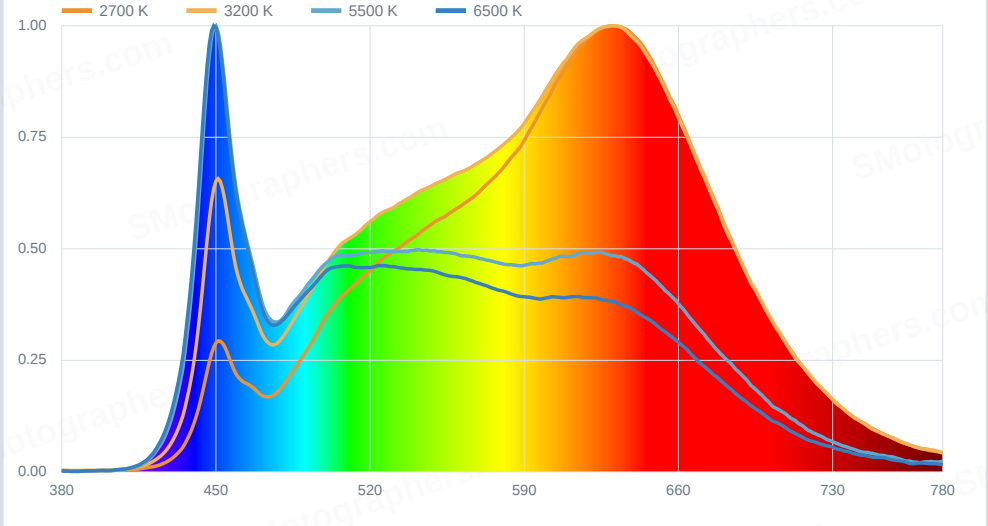

© Marvin Kuhn | SMotographers.com

Zhiyun Molus G200 Normal


White light detail | Target CCT 2700 K

Level	Lux	Measured CCT	Duv	SDCM	Ra	R9	Peak
100%	8225	2754 K	0.00348	1.21	96.9	77.0	630 nm


Colour metric	Value
SSI	87
TM-30 Rf	94
TM-30 Rg	97
TLCI (Info)	96
Measurements	1

Check	Value
Brightest level	100%
CCT deviation	54 K
Mired deviation	7.26
Source	Zhiyun Molus G200 Normal 100% lowe


Output linearity

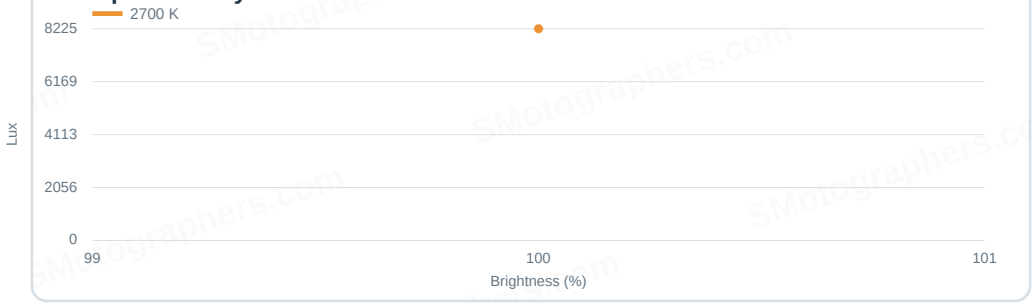

CRI R1-R15 at brightest level

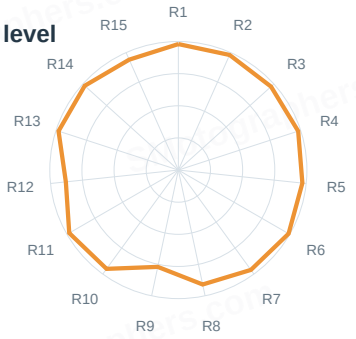

Spectra of all brightness levels

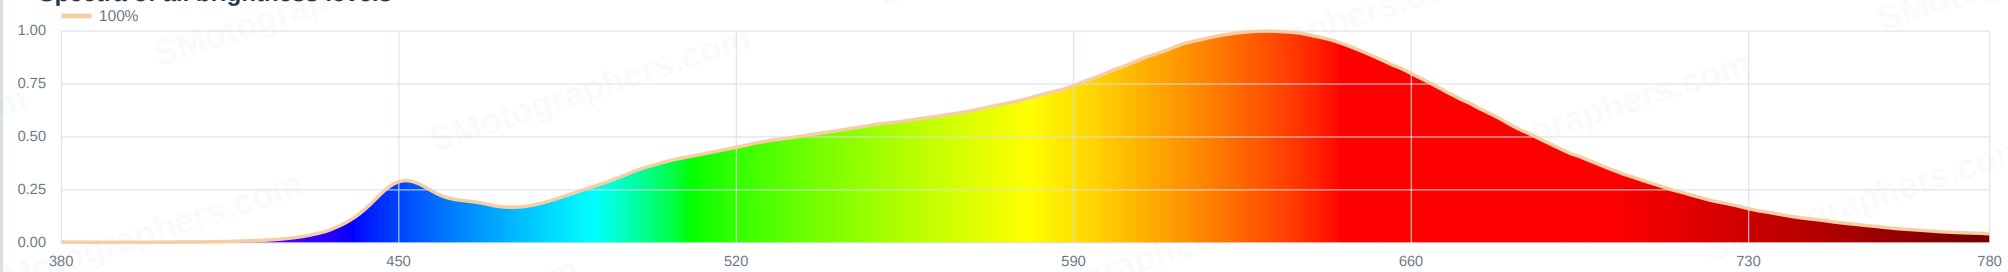

© Marvin Kuhn | SMotographers.com


Zhiyun Molus G200 Normal

ANSI/IES TM-30 colour rendition | Target CCT 2700 K

LED EVALUATOR


TM-30 RF	TM-30 RG	SSI [P2754]	CCT (TM-30)	DUV	TLCI (INFO)	MEASUREMENT
94	97	87	2754 K	0.0034	96	100 %

Color Vector Graphic

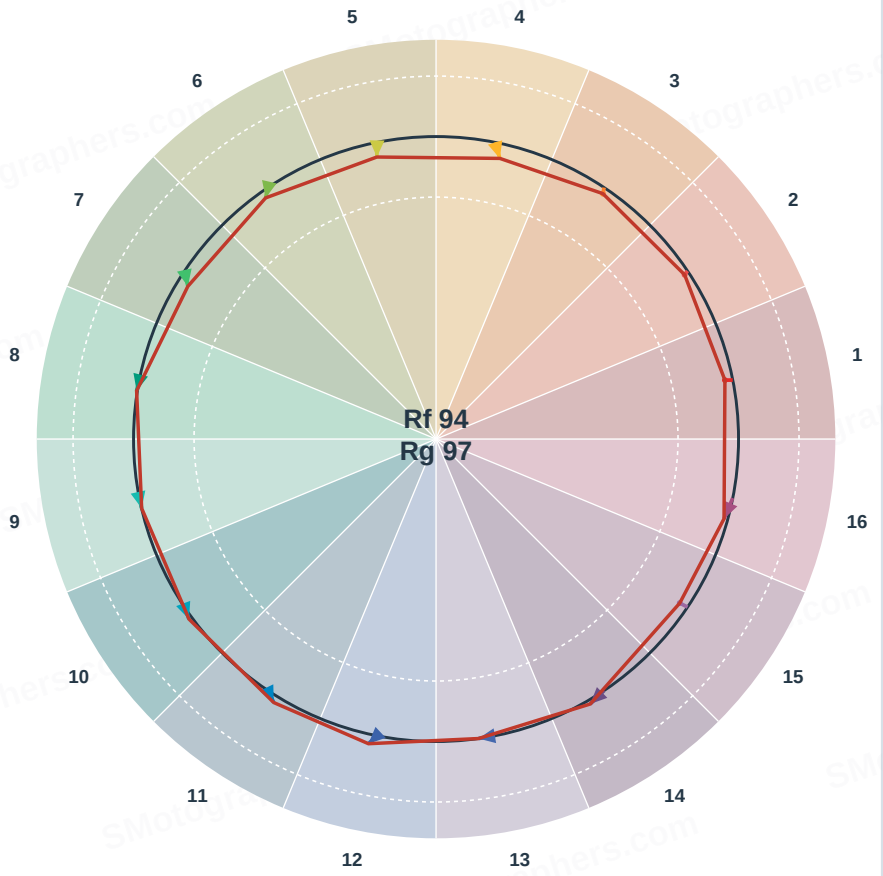


Circle = reference, arrows = shift of the test source per hue bin (CAM02-UCS).


Local chroma shift Rcs,hj

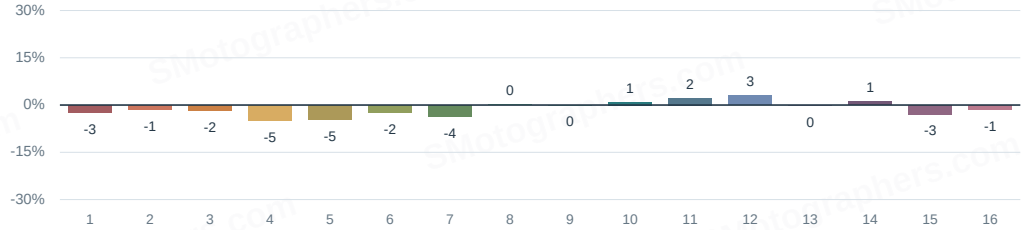

Local hue shift Rhs,hj

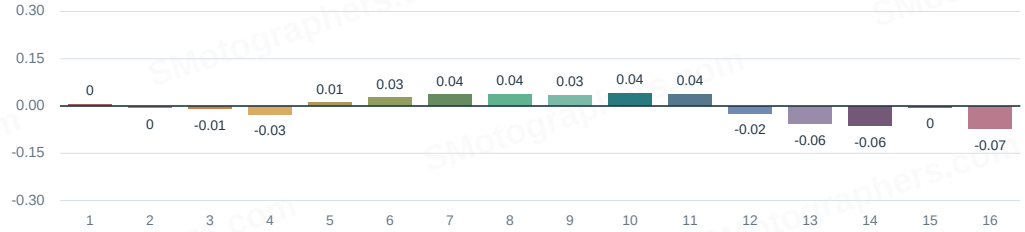

Local colour fidelity Rf,hj

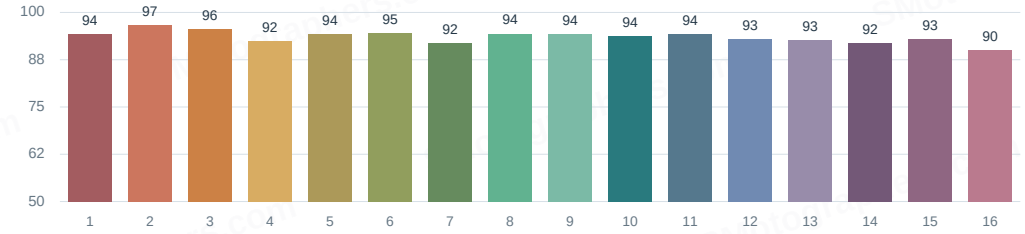

© Marvin Kuhn | SMotographers.com

Zhiyun Molus G200 Normal

TM-30 colour swatches: reference vs. measurement | Target CCT 2700 K

LED EVALUATOR

TM-30 RF	TM-30 RG	SSI [P2754]	CCT (TM-30)	DUV	TLCI (INFO)	MEASUREMENT
94	97	87	2754 K	0.0034	96	100 %

Hue bins 1-16: average per bin



1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
-3 % Chroma	-1 % Chroma	-2 % Chroma	-5 % Chroma	-5 % Chroma	-2 % Chroma	-4 % Chroma	+0 % Chroma	-0 % Chroma	+1 % Chroma	+2 % Chroma	+3 % Chroma	-0 % Chroma	+1 % Chroma	-3 % Chroma	-1 % Chroma

Colour samples CES 1-99 (left reference, right measurement; sorted by hue bin)

CES 1 Rf 98	CES 2 Rf 96	CES 3 Rf 91	CES 4 Rf 96	CES 5 Rf 89	CES 6 Rf 93	CES 7 Rf 94	CES 8 Rf 91	CES 9 Rf 98	CES 98 Rf 97	CES 99 Rf 94
CES 10 Rf 99	CES 11 Rf 97	CES 12 Rf 98	CES 13 Rf 97	CES 14 Rf 99	CES 15 Rf 94	CES 16 Rf 93	CES 17 Rf 94	CES 18 Rf 95	CES 19 Rf 97	CES 20 Rf 97
CES 21 Rf 97	CES 22 Rf 94	CES 23 Rf 97	CES 24 Rf 97	CES 25 Rf 96	CES 26 Rf 95	CES 27 Rf 89	CES 28 Rf 98	CES 29 Rf 91	CES 30 Rf 87	CES 31 Rf 91
CES 33 Rf 93	CES 36 Rf 83	CES 32 Rf 93	CES 34 Rf 95	CES 35 Rf 98	CES 37 Rf 96	CES 38 Rf 84	CES 39 Rf 97	CES 40 Rf 96	CES 41 Rf 94	CES 42 Rf 94
CES 43 Rf 94	CES 44 Rf 99	CES 45 Rf 95	CES 46 Rf 95	CES 47 Rf 90	CES 48 Rf 88	CES 49 Rf 96	CES 50 Rf 94	CES 51 Rf 93	CES 52 Rf 95	CES 53 Rf 95
CES 54 Rf 93	CES 55 Rf 92	CES 56 Rf 95	CES 57 Rf 93	CES 58 Rf 94	CES 59 Rf 98	CES 60 Rf 94	CES 61 Rf 95	CES 62 Rf 88	CES 64 Rf 95	CES 65 Rf 93
CES 66 Rf 94	CES 67 Rf 94	CES 68 Rf 95	CES 63 Rf 95	CES 69 Rf 95	CES 70 Rf 95	CES 71 Rf 91	CES 72 Rf 97	CES 73 Rf 93	CES 75 Rf 93	CES 74 Rf 90
CES 76 Rf 98	CES 77 Rf 91	CES 78 Rf 94	CES 79 Rf 92	CES 80 Rf 94	CES 81 Rf 84	CES 82 Rf 98	CES 83 Rf 95	CES 84 Rf 97	CES 85 Rf 86	CES 86 Rf 88
CES 87 Rf 97	CES 88 Rf 95	CES 89 Rf 91	CES 90 Rf 93	CES 91 Rf 81	CES 92 Rf 86	CES 93 Rf 92	CES 94 Rf 86	CES 95 Rf 90	CES 96 Rf 96	CES 97 Rf 99

Shown as corresponding colours in sRGB (CAM02-UCS, adapted to D65); screen and print reproduction is only an approximation.

© Marvin Kuhn | SMotographers.com


Zhiyun Molus G200 Normal

TM-30 colour samples & Academy SSI | Target CCT 2700 K

LED EVALUATOR


TM-30 RF	TM-30 RG	SSI [P2754]	CCT (TM-30)	DUV	TLCI (INFO)	MEASUREMENT
94	97	87	2754 K	0.0034	96	100 %

Fidelity per colour sample Rf,CES1-99

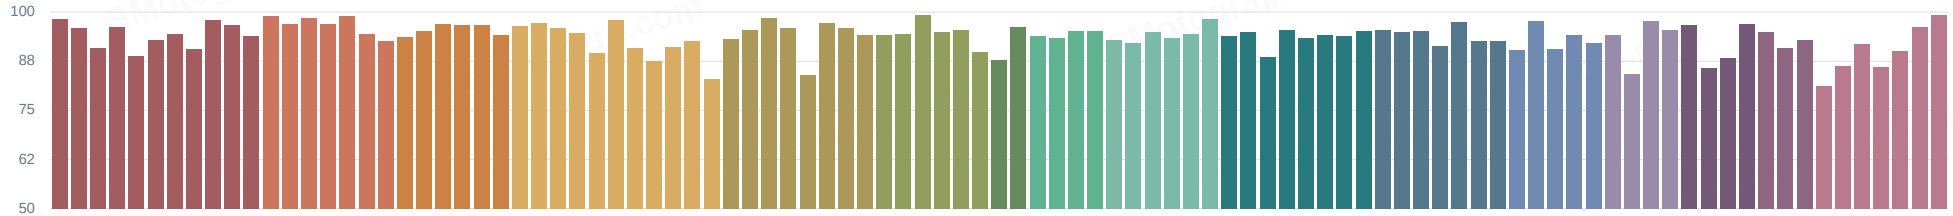


Samples sorted by hue bin 1-16; colour = hue bin.

Spectrum vs. TM-30 reference (equal area)

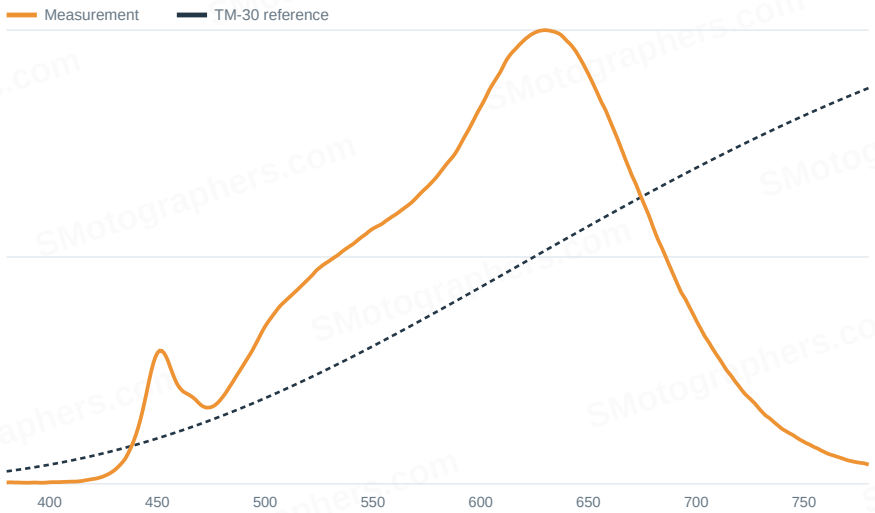

Academy SSI [P2754]

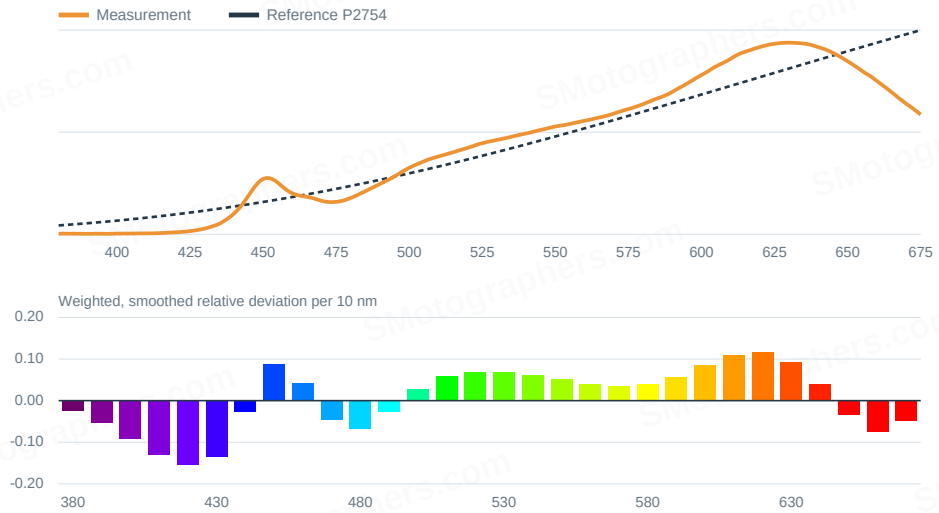

Reference as in the Academy SSI calculator (default): Planckian below 4000 K, CIE daylight from 4000 K, each at the measured CCT.

© Marvin Kuhn | SMotographers.com

Zhiyun Molus G200 Normal


White light detail | Target CCT 3200 K

Level	Lux	Measured CCT	Duv	SDCM	Ra	R9	Peak
10%	996	3211 K	-0.00224	7.03	97.4	96.0	631 nm
50%	4700	3221 K	-0.00171	6.89	97.5	92.0	630 nm
100%	8794	3247 K	-0.00209	6.21	97.6	91.0	631 nm


Colour metric	Value
SSI	82
TM-30 Rf	95
TM-30 Rg	101
TLCI (Info)	98
Measurements	3

Check	Value
Brightest level	100%
CCT deviation	47 K
Mired deviation	4.52
Source	Zhiyun Molus G200 Normal 100% 3200


Output linearity

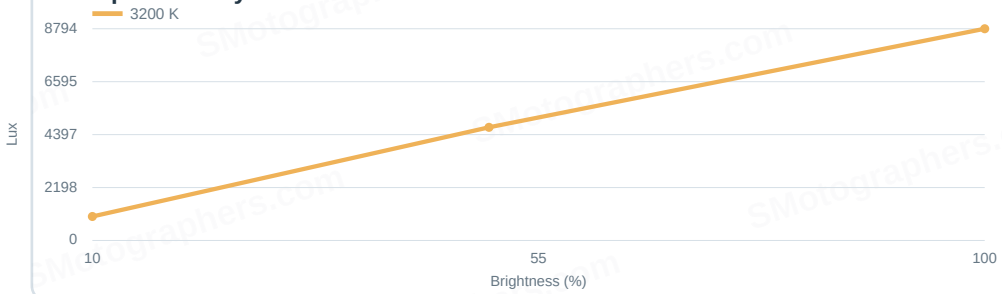

CRI R1-R15 at brightest level

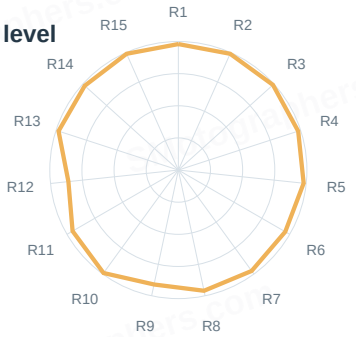

Spectra of all brightness levels

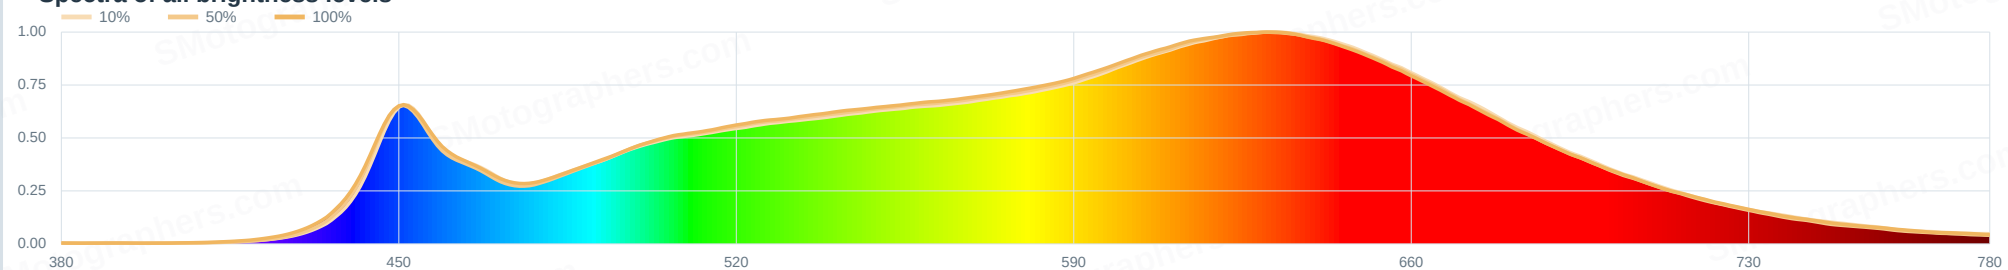

© Marvin Kuhn | SMotographers.com


Zhiyun Molus G200 Normal

ANSI/IES TM-30 colour rendition | Target CCT 3200 K

LED EVALUATOR


TM-30 RF	TM-30 RG	SSI [P3257]	CCT (TM-30)	DUV	TLCI (INFO)	MEASUREMENT
95	101	82	3247 K	-0.0021	98	100 %

Color Vector Graphic

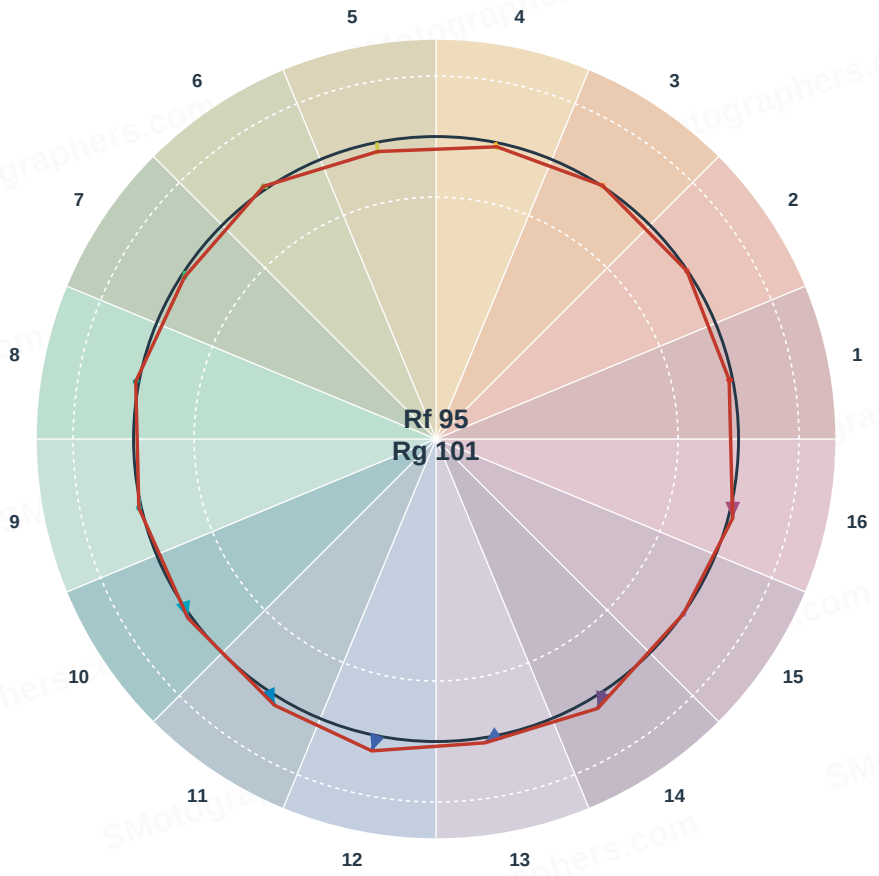


Circle = reference, arrows = shift of the test source per hue bin (CAM02-UCS).


Local chroma shift Rcs,hj

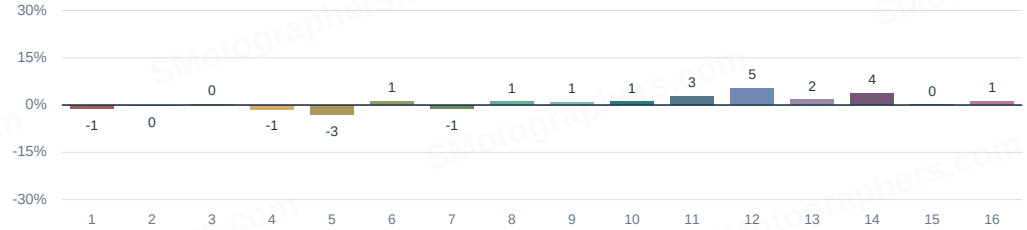

Local hue shift Rhs,hj

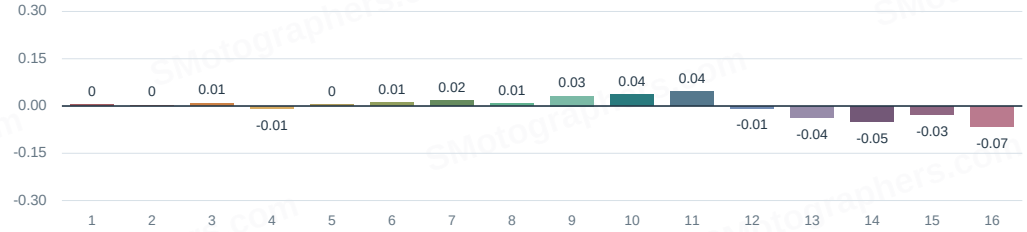

Local colour fidelity Rf,hj

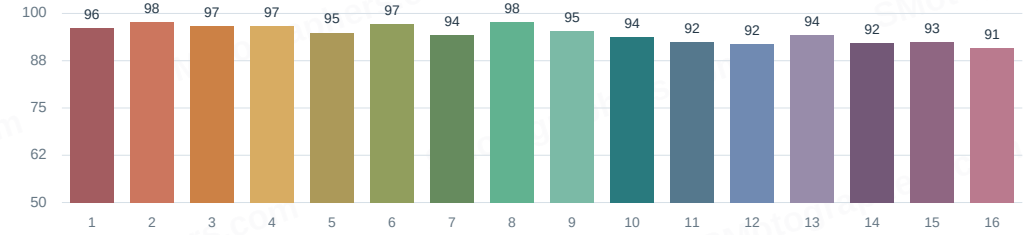

© Marvin Kuhn | SMotographers.com

Zhiyun Molus G200 Normal

TM-30 colour swatches: reference vs. measurement | Target CCT 3200 K

LED EVALUATOR

TM-30 RF	TM-30 RG	SSI [P3257]	CCT (TM-30)	DUV	TLCI (INFO)	MEASUREMENT
95	101	82	3247 K	-0.0021	98	100 %

Hue bins 1-16: average per bin



1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
-1 % Chroma	-0 % Chroma	+0 % Chroma	-1 % Chroma	-3 % Chroma	+1 % Chroma	-1 % Chroma	+1 % Chroma	+1 % Chroma	+1 % Chroma	+3 % Chroma	+5 % Chroma	+2 % Chroma	+4 % Chroma	+0 % Chroma	+1 % Chroma

Colour samples CES 1-99 (left reference, right measurement; sorted by hue bin)

CES 1 Rf 99	CES 2 Rf 98	CES 3 Rf 91	CES 4 Rf 98	CES 5 Rf 92	CES 6 Rf 96	CES 7 Rf 98	CES 8 Rf 95	CES 9 Rf 99	CES 99 Rf 96	CES 10 Rf 97
CES 11 Rf 99	CES 12 Rf 98	CES 13 Rf 98	CES 14 Rf 100	CES 15 Rf 95	CES 16 Rf 97	CES 17 Rf 96	CES 18 Rf 97	CES 19 Rf 99	CES 20 Rf 89	CES 21 Rf 99
CES 22 Rf 99	CES 23 Rf 98	CES 24 Rf 99	CES 25 Rf 98	CES 26 Rf 100	CES 27 Rf 90	CES 28 Rf 99	CES 29 Rf 97	CES 30 Rf 91	CES 31 Rf 98	CES 32 Rf 96
CES 33 Rf 97	CES 34 Rf 98	CES 35 Rf 98	CES 36 Rf 81	CES 37 Rf 97	CES 38 Rf 86	CES 39 Rf 99	CES 40 Rf 98	CES 41 Rf 97	CES 42 Rf 96	CES 43 Rf 96
CES 44 Rf 99	CES 45 Rf 98	CES 46 Rf 99	CES 47 Rf 95	CES 48 Rf 91	CES 49 Rf 97	CES 50 Rf 97	CES 51 Rf 97	CES 52 Rf 98	CES 53 Rf 98	CES 54 Rf 93
CES 55 Rf 92	CES 56 Rf 98	CES 57 Rf 97	CES 58 Rf 97	CES 59 Rf 99	CES 60 Rf 93	CES 61 Rf 94	CES 62 Rf 88	CES 64 Rf 96	CES 65 Rf 95	CES 66 Rf 95
CES 67 Rf 95	CES 68 Rf 93	CES 63 Rf 97	CES 69 Rf 93	CES 70 Rf 93	CES 71 Rf 89	CES 72 Rf 96	CES 73 Rf 88	CES 75 Rf 90	CES 76 Rf 94	CES 74 Rf 92
CES 77 Rf 91	CES 78 Rf 89	CES 79 Rf 95	CES 80 Rf 94	CES 81 Rf 89	CES 82 Rf 97	CES 83 Rf 97	CES 84 Rf 96	CES 85 Rf 85	CES 86 Rf 92	CES 87 Rf 94
CES 88 Rf 97	CES 89 Rf 91	CES 90 Rf 95	CES 92 Rf 86	CES 91 Rf 77	CES 93 Rf 92	CES 94 Rf 89	CES 95 Rf 88	CES 96 Rf 96	CES 97 Rf 97	CES 98 Rf 99

Shown as corresponding colours in sRGB (CAM02-UCS, adapted to D65); screen and print reproduction is only an approximation.

© Marvin Kuhn | SMotographers.com


Zhiyun Molus G200 Normal

TM-30 colour samples & Academy SSI | Target CCT 3200 K

LED EVALUATOR


TM-30 RF	TM-30 RG	SSI [P3257]	CCT (TM-30)	DUV	TLCI (INFO)	MEASUREMENT
95	101	82	3247 K	-0.0021	98	100 %

Fidelity per colour sample Rf,CES1-99

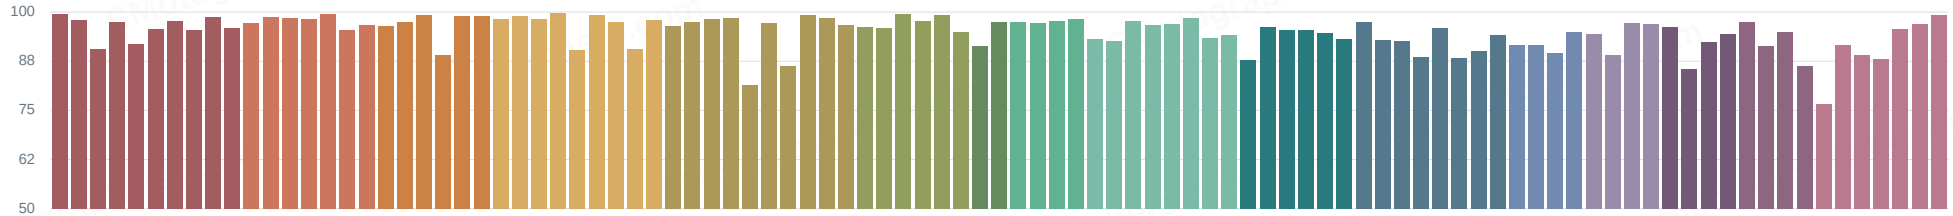

Samples sorted by hue bin 1-16; colour = hue bin.

Spectrum vs. TM-30 reference (equal area)

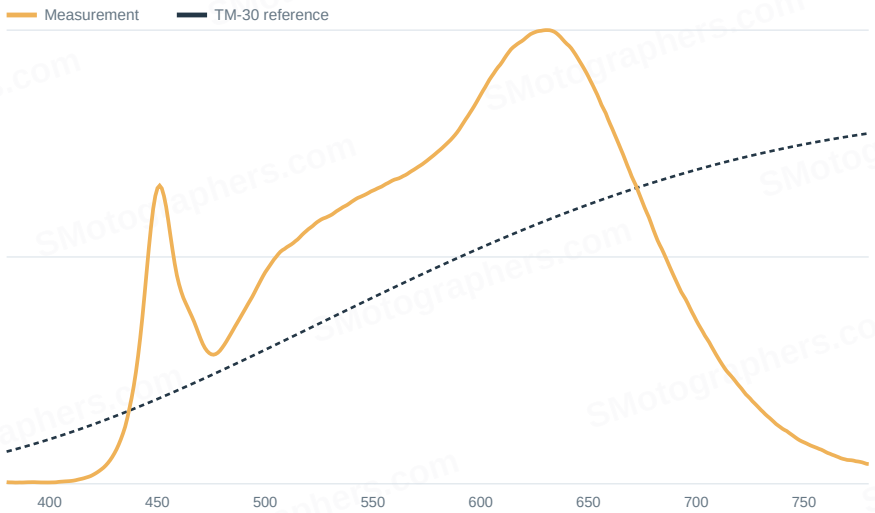

Academy SSI [P3257]



Reference as in the Academy SSI calculator (default): Planckian below 4000 K, CIE daylight from 4000 K, each at the measured CCT.

© Marvin Kuhn | SMotographers.com

Zhiyun Molus G200 Normal


White light detail | Target CCT 5500 K

Level	Lux	Measured CCT	Duv	SDCM	Ra	R9	Peak
10%	1094	5665 K	-0.00231	5.61	96.4	90.0	451 nm
50%	5134	5632 K	-0.00173	4.89	97.3	95.0	450 nm
100%	9734	5569 K	-0.00176	5.16	97.5	97.0	450 nm


Colour metric	Value
SSI	72
TM-30 Rf	94
TM-30 Rg	102
TLCI (Info)	98
Measurements	3

Check	Value
Brightest level	100%
CCT deviation	69 K
Mired deviation	2.25
Source	Zhiyun Molus G200 Normal 100% 5500


Output linearity

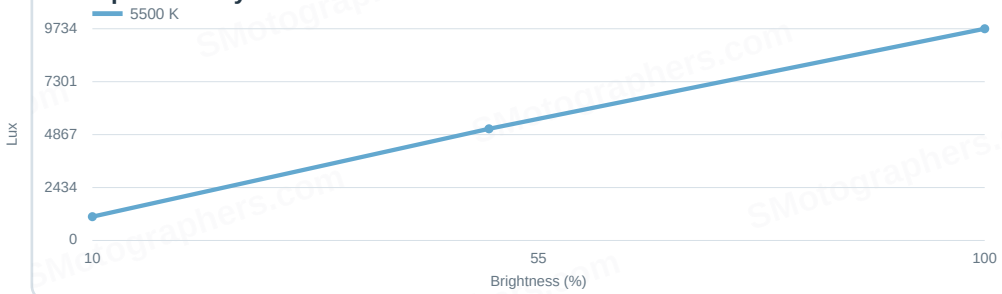

CRI R1-R15 at brightest level

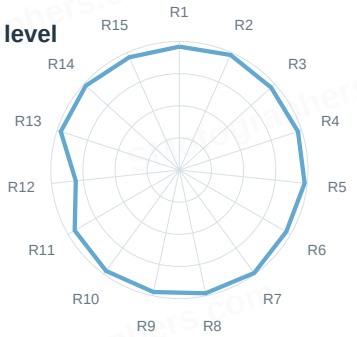

Spectra of all brightness levels

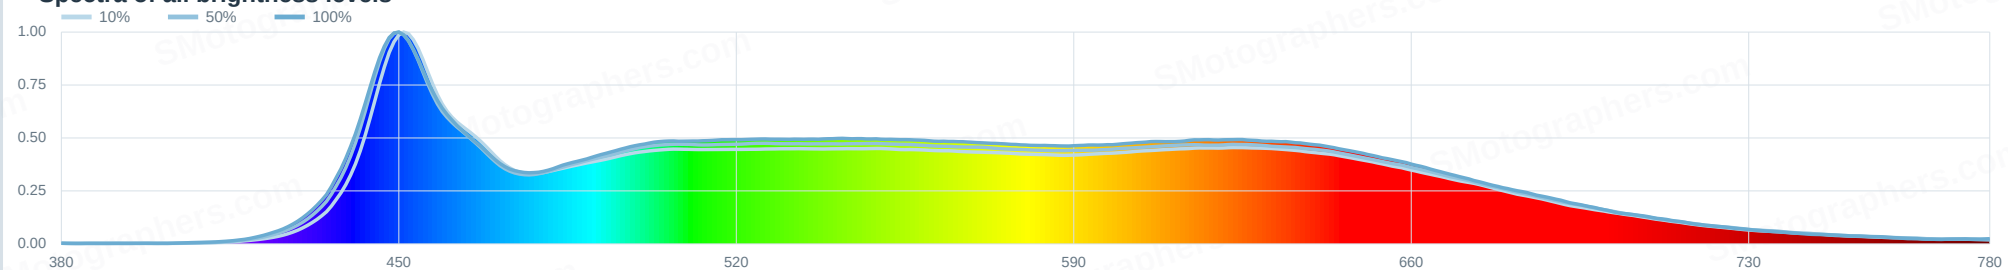

© Marvin Kuhn | SMotographers.com


Zhiyun Molus G200 Normal

ANSI/IES TM-30 colour rendition | Target CCT 5500 K

LED EVALUATOR


TM-30 RF	TM-30 RG	SSI [D5555]	CCT (TM-30)	DUV	TLCI (INFO)	MEASUREMENT
94	102	72	5554 K	-0.0017	98	100 %

Color Vector Graphic

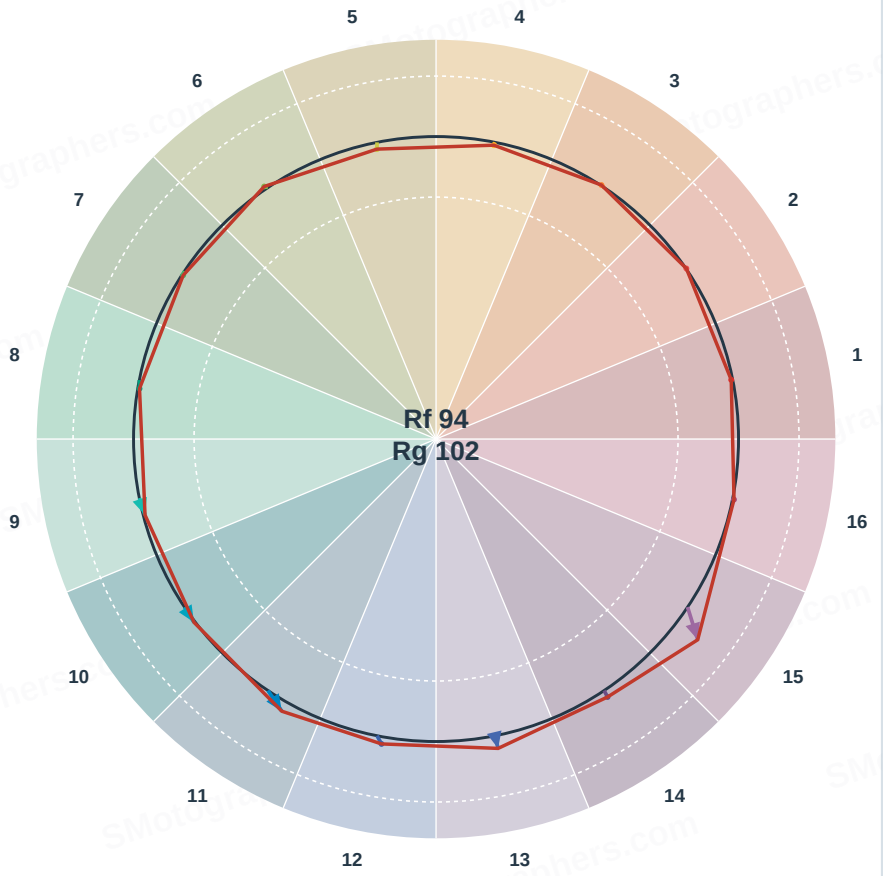


Circle = reference, arrows = shift of the test source per hue bin (CAM02-UCS).


Local chroma shift Rcs,hj

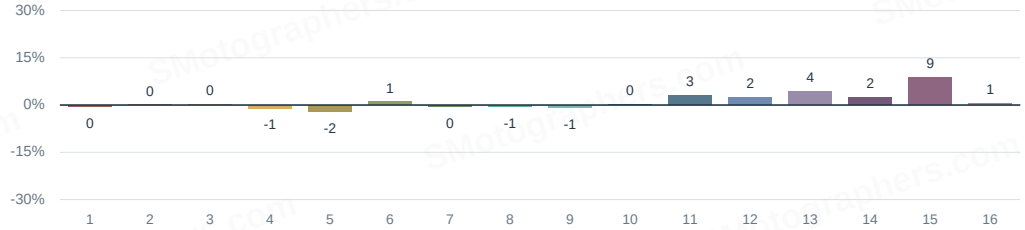

Local hue shift Rhs,hj

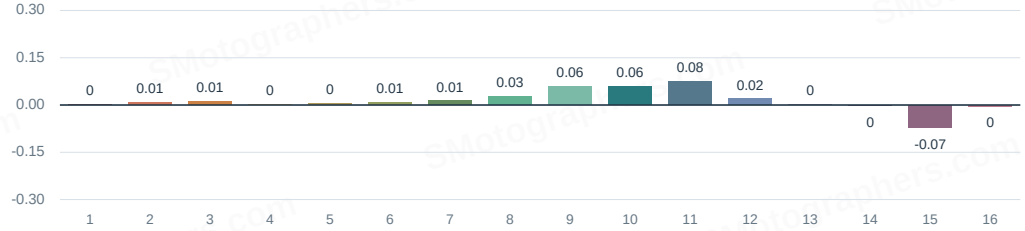

Local colour fidelity Rf,hj

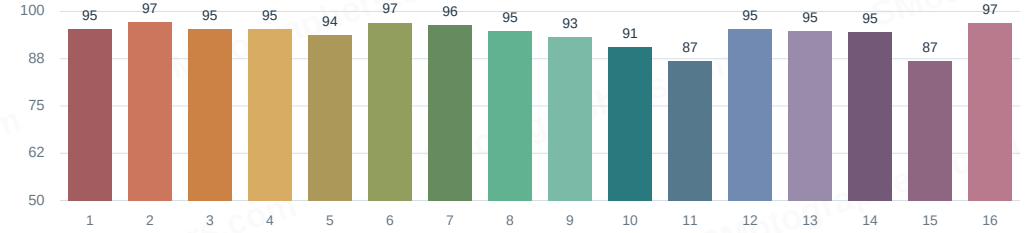

© Marvin Kuhn | SMotographers.com

Zhiyun Molus G200 Normal

TM-30 colour swatches: reference vs. measurement | Target CCT 5500 K

LED EVALUATOR

TM-30 RF	TM-30 RG	SSI [D5555]	CCT (TM-30)	DUV	TLCI (INFO)	MEASUREMENT
94	102	72	5554 K	-0.0017	98	100 %

Hue bins 1-16: average per bin

Reference

Measurement



1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
-0 % Chroma	+0 % Chroma	+0 % Chroma	-1 % Chroma	-2 % Chroma	+1 % Chroma	-0 % Chroma	-1 % Chroma	-1 % Chroma	+0 % Chroma	+3 % Chroma	+2 % Chroma	+4 % Chroma	+2 % Chroma	+9 % Chroma	+1 % Chroma

Colour samples CES 1-99 (left reference, right measurement; sorted by hue bin)

CES 2 Rf 98	CES 3 Rf 87	CES 4 Rf 95	CES 5 Rf 93	CES 6 Rf 97	CES 7 Rf 98	CES 8 Rf 98	CES 9 Rf 97	CES 10 Rf 95	CES 11 Rf 96	CES 12 Rf 96
CES 13 Rf 98	CES 14 Rf 100	CES 15 Rf 95	CES 16 Rf 98	CES 17 Rf 97	CES 18 Rf 97	CES 19 Rf 96	CES 20 Rf 87	CES 21 Rf 95	CES 22 Rf 97	CES 23 Rf 99
CES 24 Rf 96	CES 25 Rf 94	CES 26 Rf 97	CES 27 Rf 90	CES 28 Rf 98	CES 29 Rf 98	CES 30 Rf 92	CES 31 Rf 98	CES 32 Rf 95	CES 33 Rf 98	CES 34 Rf 95
CES 35 Rf 96	CES 36 Rf 80	CES 37 Rf 96	CES 38 Rf 86	CES 39 Rf 99	CES 40 Rf 99	CES 41 Rf 97	CES 42 Rf 94	CES 43 Rf 94	CES 44 Rf 100	CES 45 Rf 96
CES 46 Rf 98	CES 47 Rf 98	CES 48 Rf 92	CES 49 Rf 97	CES 50 Rf 98	CES 51 Rf 97	CES 52 Rf 98	CES 53 Rf 98	CES 54 Rf 93	CES 55 Rf 92	CES 56 Rf 96
CES 57 Rf 95	CES 58 Rf 95	CES 59 Rf 98	CES 60 Rf 92	CES 61 Rf 92	CES 62 Rf 87	CES 63 Rf 96	CES 64 Rf 93	CES 65 Rf 93	CES 66 Rf 91	CES 67 Rf 90
CES 68 Rf 89	CES 69 Rf 89	CES 70 Rf 88	CES 71 Rf 82	CES 72 Rf 94	CES 73 Rf 82	CES 74 Rf 92	CES 75 Rf 84	CES 76 Rf 88	CES 77 Rf 88	CES 78 Rf 84
CES 79 Rf 97	CES 80 Rf 93	CES 81 Rf 96	CES 82 Rf 97	CES 83 Rf 99	CES 84 Rf 94	CES 85 Rf 86	CES 86 Rf 97	CES 87 Rf 93	CES 88 Rf 97	CES 89 Rf 94
CES 90 Rf 96	CES 91 Rf 72	CES 92 Rf 86	CES 93 Rf 91	CES 94 Rf 92	CES 95 Rf 85	CES 1 Rf 99	CES 96 Rf 94	CES 97 Rf 97	CES 98 Rf 98	CES 99 Rf 96

Shown as corresponding colours in sRGB (CAM02-UCS, adapted to D65); screen and print reproduction is only an approximation.

© Marvin Kuhn | SMotographers.com


Zhiyun Molus G200 Normal

TM-30 colour samples & Academy SSI | Target CCT 5500 K

LED EVALUATOR


TM-30 RF	TM-30 RG	SSI [D5555]	CCT (TM-30)	DUV	TLCI (INFO)	MEASUREMENT
94	102	72	5554 K	-0.0017	98	100 %

Fidelity per colour sample Rf,CES1-99

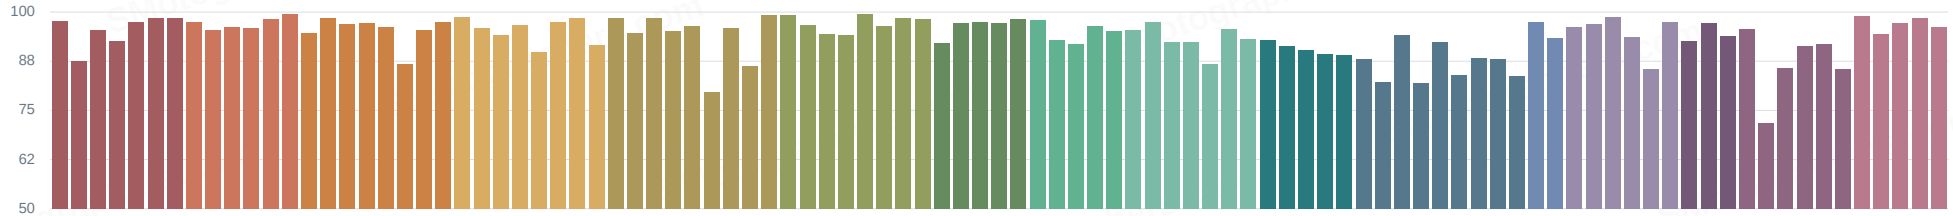


Samples sorted by hue bin 1-16; colour = hue bin.

Spectrum vs. TM-30 reference (equal area)

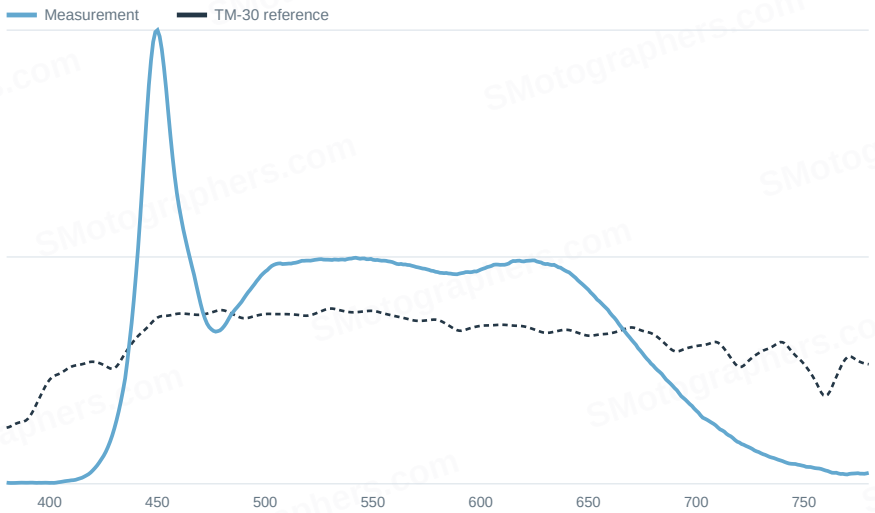

Academy SSI [D5555]

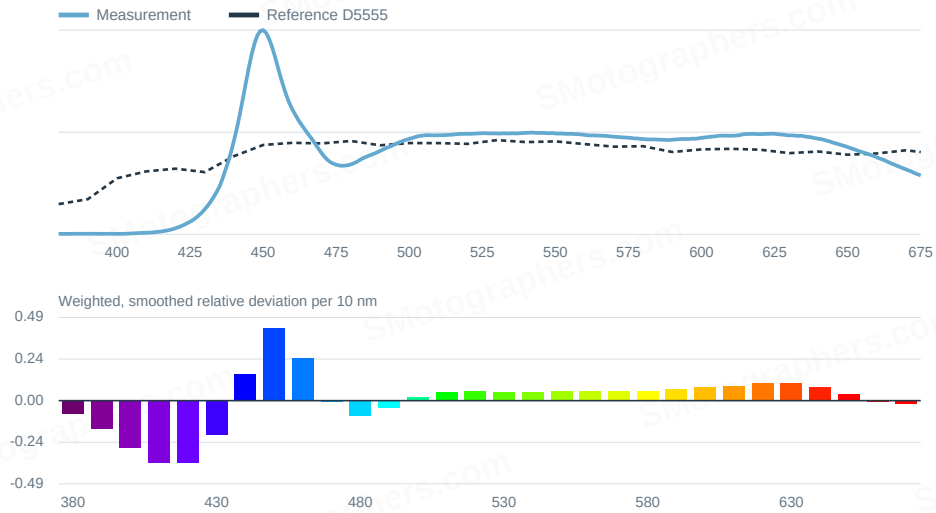

Reference as in the Academy SSI calculator (default): Planckian below 4000 K, CIE daylight from 4000 K, each at the measured CCT.

© Marvin Kuhn | SMotographers.com

Zhiyun Molus G200 Normal


White light detail | Target CCT 6500 K

Level	Lux	Measured CCT	Duv	SDCM	Ra	R9	Peak
100%	9766	6567 K	0.00104	2.52	97.2	94.0	450 nm


Colour metric	Value
SSI	69
TM-30 Rf	93
TM-30 Rg	100
TLCI (Info)	98
Measurements	1

Check	Value
Brightest level	100%
CCT deviation	67 K
Mired deviation	1.57
Source	Zhiyun Molus G200 Normal 100% 6500


Output linearity

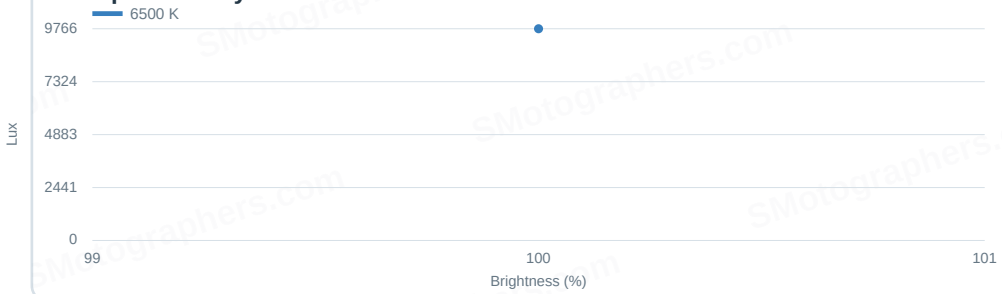

CRI R1-R15 at brightest level

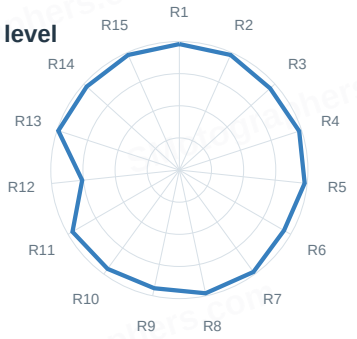

Spectra of all brightness levels

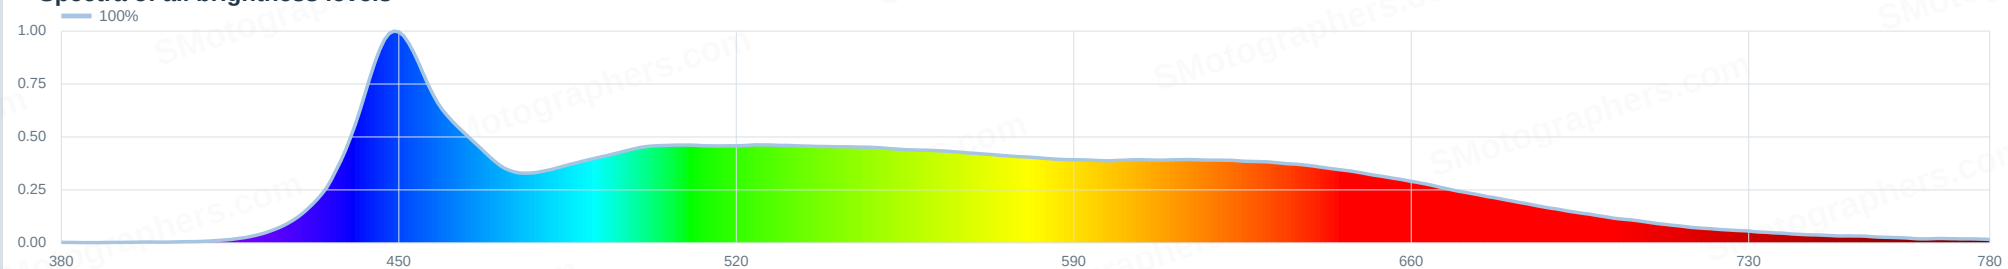

© Marvin Kuhn | SMotographers.com


Zhiyun Molus G200 Normal

ANSI/IES TM-30 colour rendition | Target CCT 6500 K

LED EVALUATOR


TM-30 RF	TM-30 RG	SSI [D6567]	CCT (TM-30)	DUV	TLCI (INFO)	MEASUREMENT
93	100	69	6568 K	0.0011	98	100 %

Color Vector Graphic

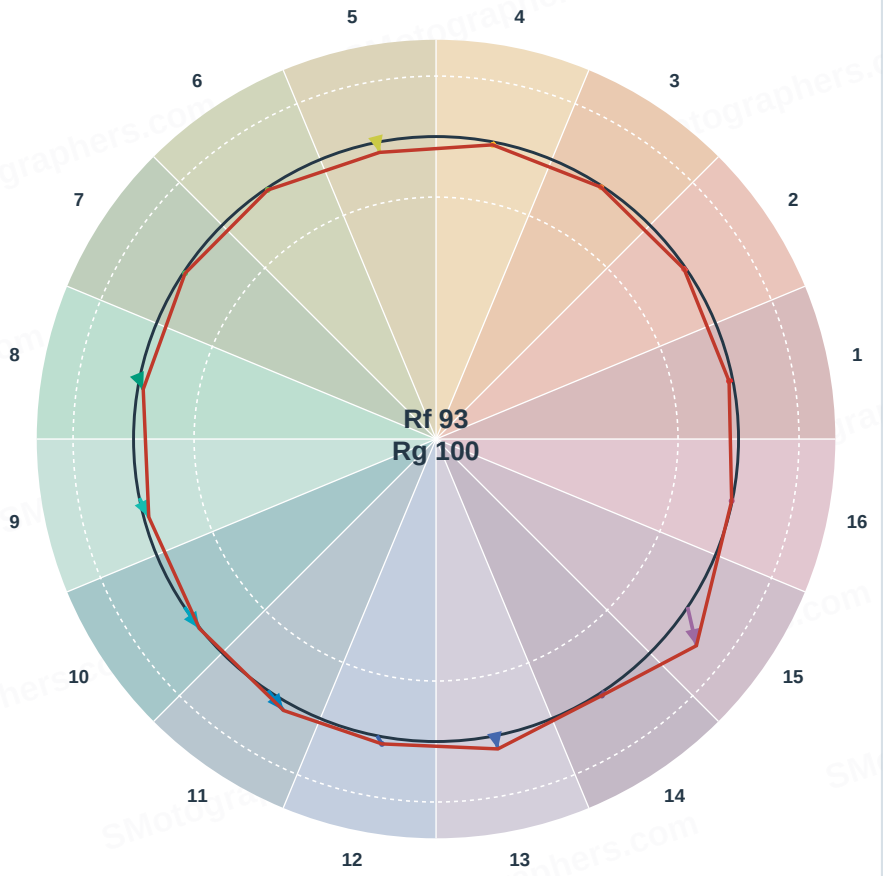


Circle = reference, arrows = shift of the test source per hue bin (CAM02-UCS).


Local chroma shift Rcs,hj

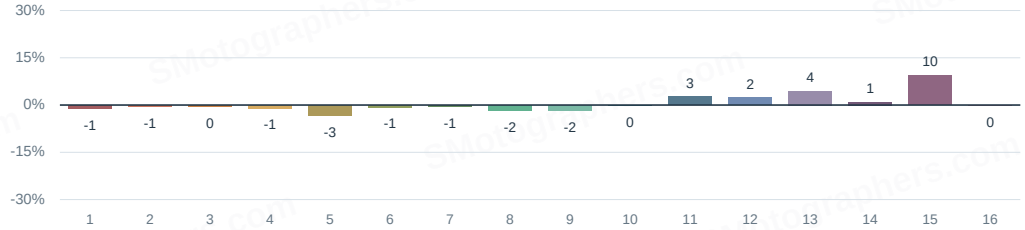

Local hue shift Rhs,hj

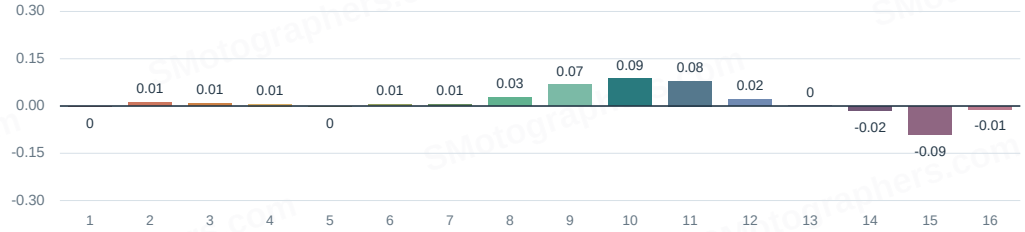

Local colour fidelity Rf,hj

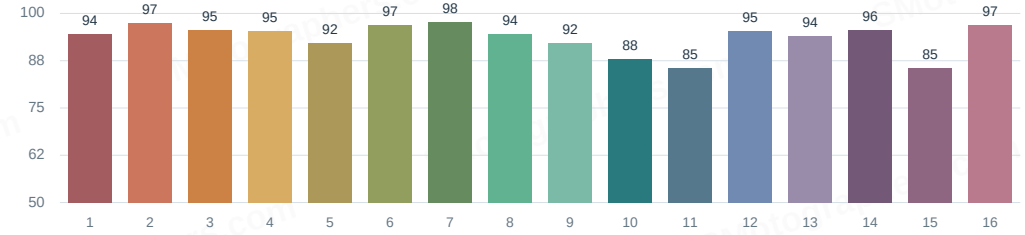

© Marvin Kuhn | SMotographers.com

Zhiyun Molus G200 Normal

TM-30 colour swatches: reference vs. measurement | Target CCT 6500 K

LED EVALUATOR

TM-30 RF	TM-30 RG	SSI [D6567]	CCT (TM-30)	DUV	TLCI (INFO)	MEASUREMENT
93	100	69	6568 K	0.0011	98	100 %

Hue bins 1-16: average per bin



1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
-1 % Chroma	-1 % Chroma	-0 % Chroma	-1 % Chroma	-3 % Chroma	-1 % Chroma	-1 % Chroma	-2 % Chroma	-2 % Chroma	-0 % Chroma	+3 % Chroma	+2 % Chroma	+4 % Chroma	+1 % Chroma	+10 % Chroma	-0 % Chroma

Colour samples CES 1-99 (left reference, right measurement; sorted by hue bin)

CES 2 Rf 98	CES 3 Rf 85	CES 4 Rf 94	CES 5 Rf 92	CES 6 Rf 97	CES 7 Rf 99	CES 8 Rf 97	CES 10 Rf 96	CES 11 Rf 96	CES 12 Rf 96	CES 13 Rf 99
CES 14 Rf 100	CES 9 Rf 97	CES 15 Rf 94	CES 16 Rf 98	CES 17 Rf 97	CES 18 Rf 97	CES 19 Rf 96	CES 20 Rf 88	CES 21 Rf 95	CES 22 Rf 98	CES 23 Rf 98
CES 24 Rf 96	CES 25 Rf 94	CES 26 Rf 97	CES 27 Rf 88	CES 28 Rf 97	CES 29 Rf 97	CES 30 Rf 90	CES 31 Rf 97	CES 32 Rf 96	CES 33 Rf 97	CES 34 Rf 96
CES 35 Rf 97	CES 36 Rf 77	CES 37 Rf 96	CES 38 Rf 84	CES 39 Rf 99	CES 40 Rf 99	CES 41 Rf 95	CES 42 Rf 95	CES 43 Rf 96	CES 44 Rf 99	CES 45 Rf 98
CES 46 Rf 99	CES 47 Rf 97	CES 48 Rf 91	CES 49 Rf 98	CES 50 Rf 97	CES 51 Rf 97	CES 52 Rf 99	CES 53 Rf 99	CES 54 Rf 92	CES 55 Rf 91	CES 56 Rf 96
CES 57 Rf 94	CES 58 Rf 94	CES 59 Rf 97	CES 60 Rf 92	CES 61 Rf 92	CES 62 Rf 85	CES 63 Rf 94	CES 64 Rf 91	CES 65 Rf 91	CES 66 Rf 89	CES 67 Rf 88
CES 68 Rf 88	CES 69 Rf 88	CES 71 Rf 79	CES 74 Rf 91	CES 70 Rf 87	CES 72 Rf 93	CES 73 Rf 80	CES 75 Rf 81	CES 76 Rf 88	CES 77 Rf 87	CES 78 Rf 83
CES 79 Rf 97	CES 80 Rf 93	CES 81 Rf 96	CES 82 Rf 97	CES 83 Rf 99	CES 84 Rf 93	CES 85 Rf 84	CES 86 Rf 97	CES 87 Rf 93	CES 88 Rf 98	CES 89 Rf 93
CES 90 Rf 96	CES 91 Rf 68	CES 92 Rf 84	CES 93 Rf 90	CES 94 Rf 90	CES 95 Rf 84	CES 1 Rf 99	CES 96 Rf 94	CES 97 Rf 97	CES 98 Rf 98	CES 99 Rf 97

Shown as corresponding colours in sRGB (CAM02-UCS, adapted to D65); screen and print reproduction is only an approximation.

© Marvin Kuhn | SMotographers.com


Zhiyun Molus G200 Normal

TM-30 colour samples & Academy SSI | Target CCT 6500 K

LED EVALUATOR


TM-30 RF	TM-30 RG	SSI [D6567]	CCT (TM-30)	DUV	TLCI (INFO)	MEASUREMENT
93	100	69	6568 K	0.0011	98	100 %

Fidelity per colour sample Rf,CES1-99

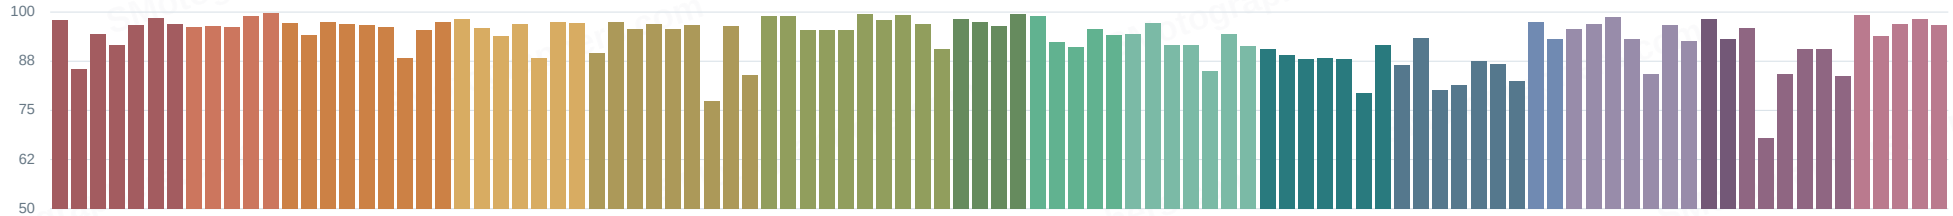


Samples sorted by hue bin 1-16; colour = hue bin.

Spectrum vs. TM-30 reference (equal area)

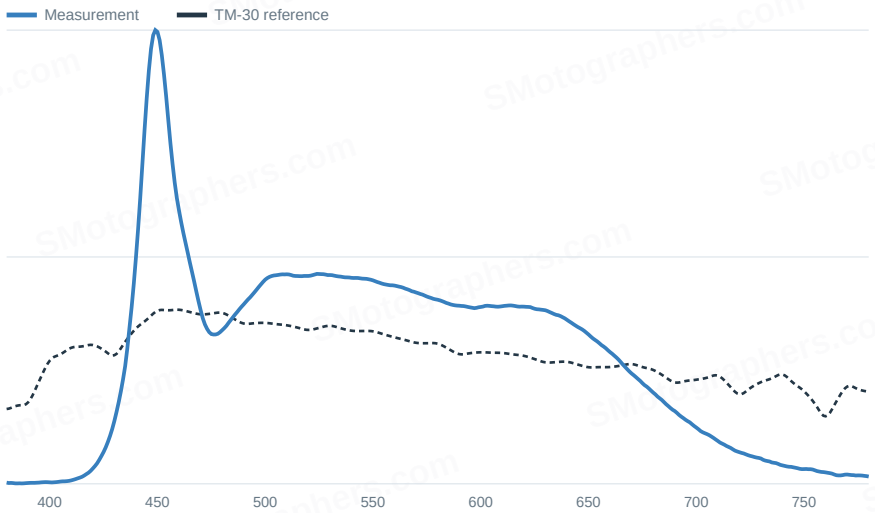

Academy SSI [D6567]

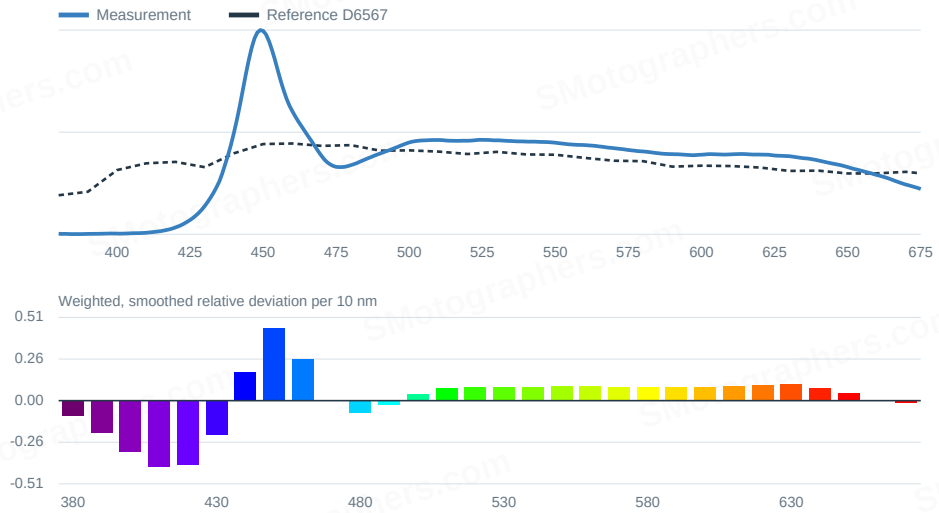

Reference as in the Academy SSI calculator (default): Planckian below 4000 K, CIE daylight from 4000 K, each at the measured CCT.


© Marvin Kuhn | SMotographers.com

Zhiyun Molus G200 Normal

Reflectors | Maximum output

Reflector	Target CCT	Lux	EV	Measured CCT	Duv	Source
Standard reflector	-	62591	14.61	5681 K	-0.00150	Zhiyun Molus G200 Normal 100% max with ref

Max EV per reflector

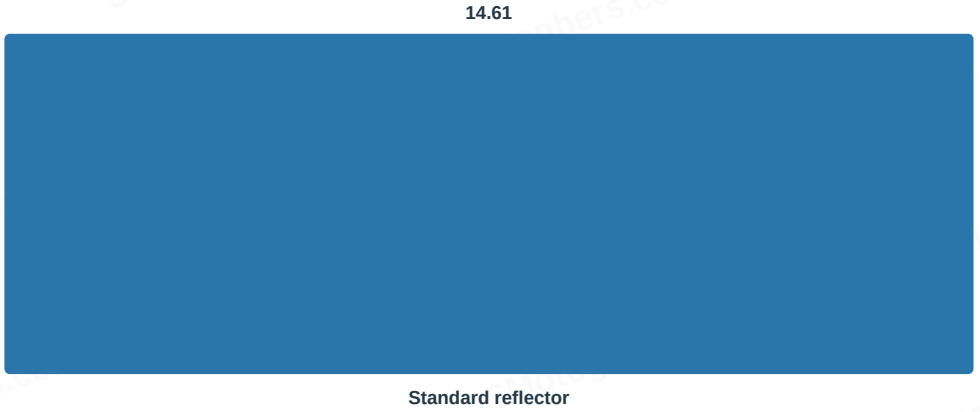

© Marvin Kuhn | SMotographers.com