



Tiefste CCT

Brand	Nanlite Forza 300B
Lux	6308.81
CCT	2698.00
DUV	0.0013
CRI	96.50
CRI (Full)	95.73
TM-30 R _f	92.00
TM-30 R _g	98.00

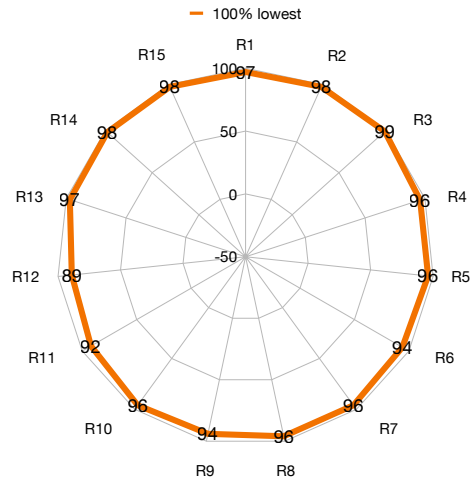


3200k

Lux	6453.85
CCT	3238.00
DUV	-0.0043
CRI	95.40
CRI (Full)	93.80
TM-30 R _f	94.00
TM-30 R _g	102.00
SSI	82.00

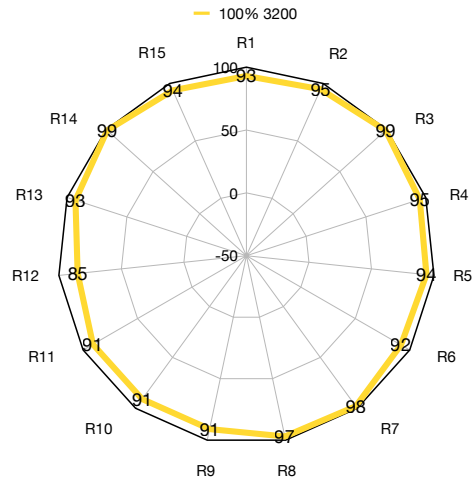



5500K

Lux	7889.22
CCT	5721.00
DUV	-0.0022
CRI	96.90
CRI (Full)	95.13
TM-30 R _f	94.00
TM-30 R _g	102.00
SSI	71.00

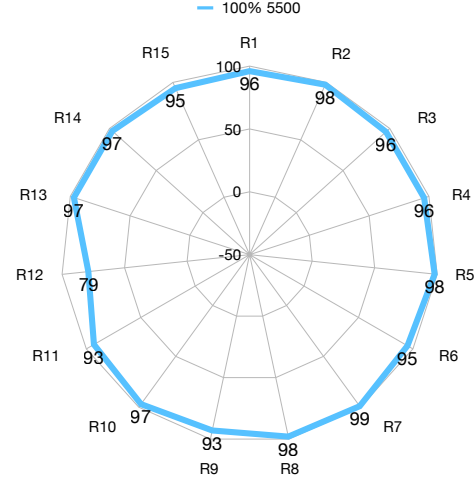

6500K

Lux	9064.46
CCT	6798.00
DUV	0.0007
CRI	96.90
CRI (Full)	95.20
TM-30 R _f	93.00
TM-30 R _g	101.00

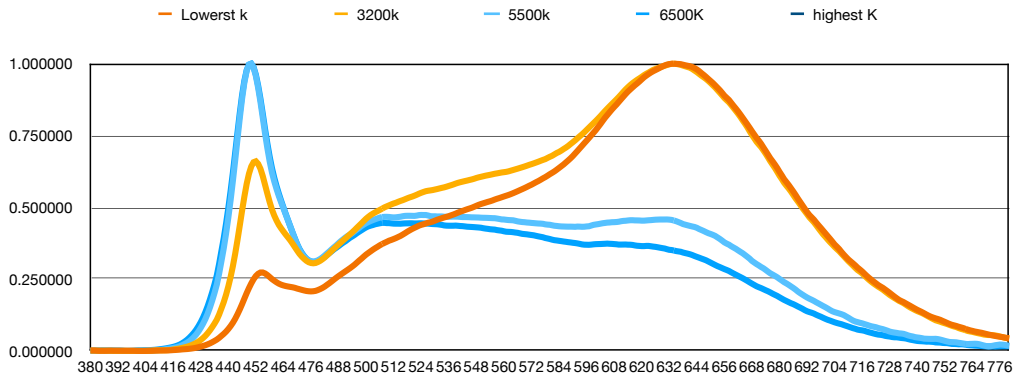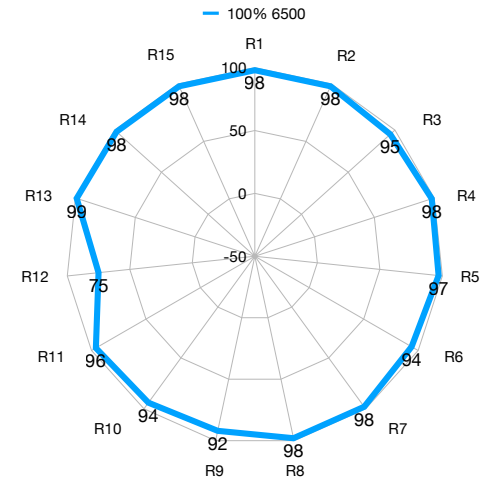

Linearität Helligkeits-Einstellungen

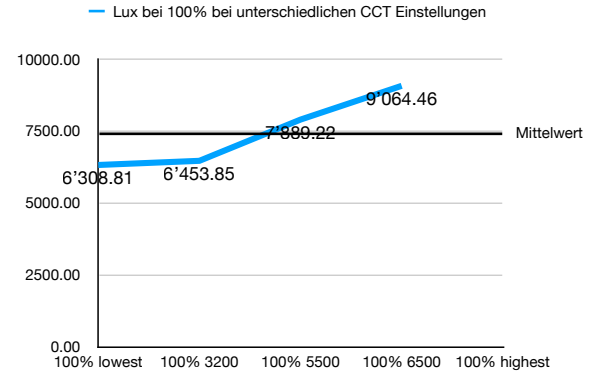
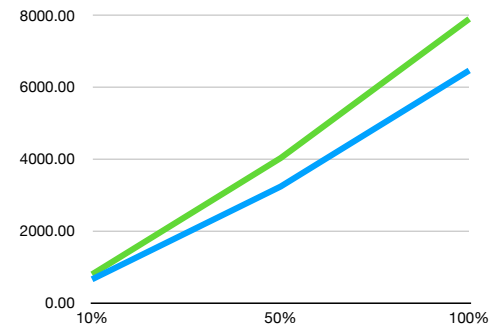


Tabelle 1

Farbtemperatur Eingestellt	Farbtemperatur gemessen	MK-1	Duv	CRI Ra	R9	CRI Re	TM30 R _f	TM30 R _g	SSI	LUX ohne Reflektor 100%	LUX 10% Leistung	LUX mit Reflektor	LUX eigentlicher % Wert bei 10% Leistung	LUX standardabweichung bei verschiedenen CCT
P3200	3238.00	3.67	-0.0043	95.40	91.00	93.80	94.00	102.00	82.00	6453.85	637.70		9.88%	1307.46
D55	5721.00	7.02	-0.0022	96.90	93.00	95.13	94.00	102.00	71.00	7889.22	776.07	38427.98	9.84%	
D65	6798.00	6.74	0.0007	96.90	92.00	95.20	93.00	101.00		9064.46				