

Tiefste CCT

Brand	Nanlite Forza 720B
Lux	15776.73
CCT	2713.00
DUV	-0.0004
CRI	97.50
CRI (Full)	96.53
TM-30 R _f	96.00
TM-30 R _g	101.00

3200k

Lux	17996.80
CCT	3216.00
DUV	-0.0052
CRI	96.40
CRI (Full)	95.47
TM-30 R _f	94.00
TM-30 R _g	103.00
SSI	82.00

5500K

Lux	21198.71
CCT	5817.00
DUV	-0.0028
CRI	96.60
CRI (Full)	94.93
TM-30 R _f	94.00
TM-30 R _g	103.00
SSI	72.00

6500K

Lux	20811.76
CCT	6955.00
DUV	0.0006
CRI	97.40
CRI (Full)	95.80
TM-30 R _f	93.00
TM-30 R _g	101.00

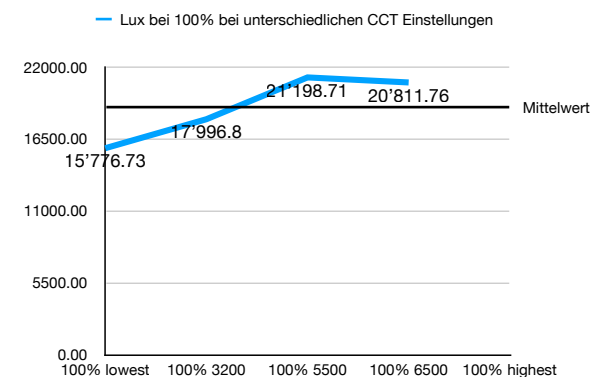
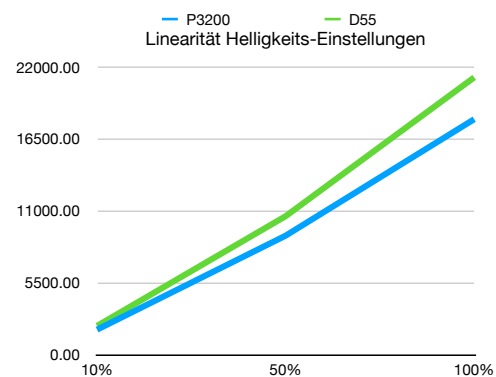
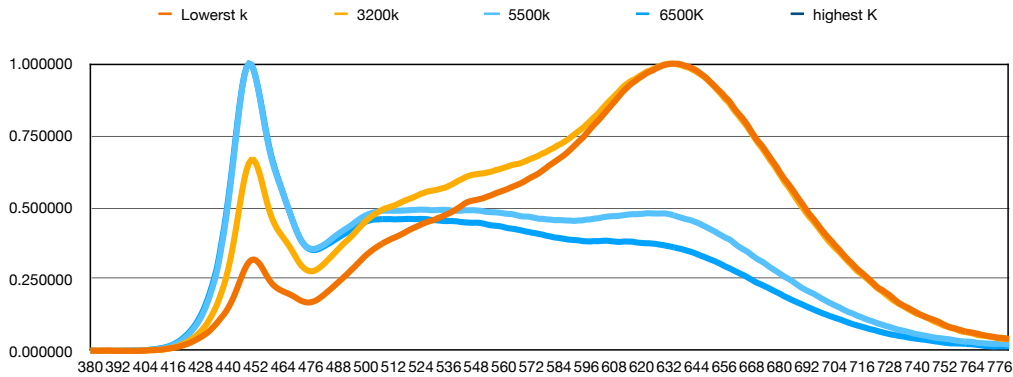
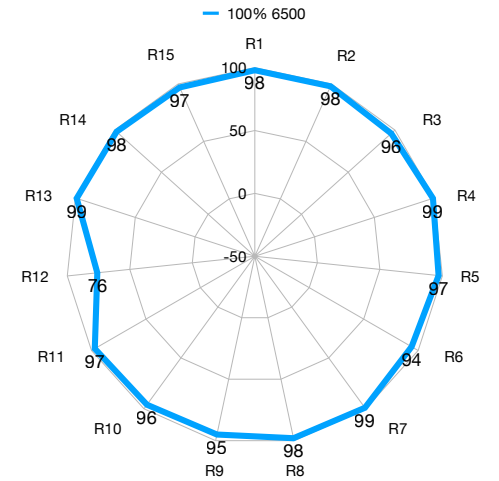
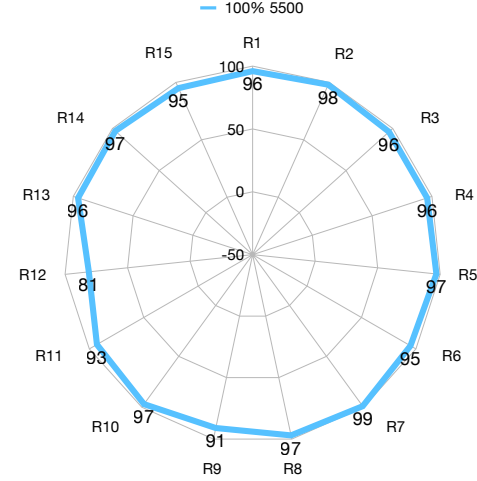
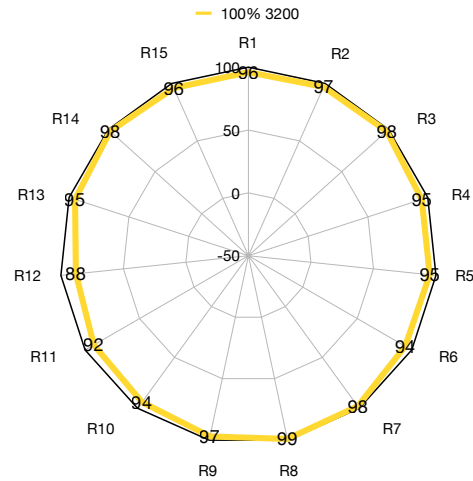
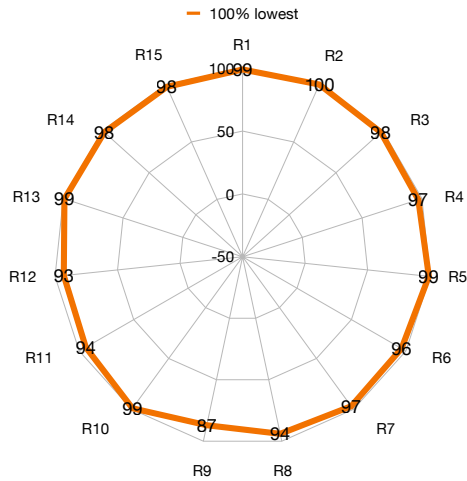


Tabelle 1

Farbtemperatur Eingestellt	Farbtemperatur gemessen	MK-1	Duv	CRI Ra	R9	CRI Re	TM30 R _f	TM30 R _g	SSI	LUX ohne Reflektor 100%	LUX 10% Leistung	LUX mit Reflektor	LUX eigentlicher % Wert bei 10% Leistung	LUX standardabweichung bei verschiedenen CCT
P3200	3216.00	1.55	-0.0052	96.40	97.00	95.47	95.00	104.00	82.00	17996.80	1881.65		10.46%	1747.66
D55	5817.00	9.91	-0.0028	96.60	91.00	94.93	94.00	103.00	72.00	21198.71	2166.93	83561.94	10.22%	
D65	6955.00	10.06	0.0006	97.40	95.00	95.80	93.00	101.00		20811.76				