

Tiefste CCT

Brand	Ulanzi VL110
Lux	81.34
CCT	2550.00
DUV	-0.0055
CRI	95.90
CRI (Full)	94.93
TM-30 R _f	94.00
TM-30 R _g	105.00

3200k

Lux	96.56
CCT	3028.00
DUV	-0.0120
CRI	91.90
CRI (Full)	89.33
TM-30 R _f	91.00
TM-30 R _g	107.00
SSI	79.00

5500K

Lux	109.26
CCT	5510.00
DUV	-0.0139
CRI	87.00
CRI (Full)	81.87
TM-30 R _f	91.00
TM-30 R _g	107.00
SSI	70.00

6500K

Lux	105.05
CCT	6566.00
DUV	-0.0116
CRI	87.70
CRI (Full)	82.47
TM-30 R _f	90.00
TM-30 R _g	105.00

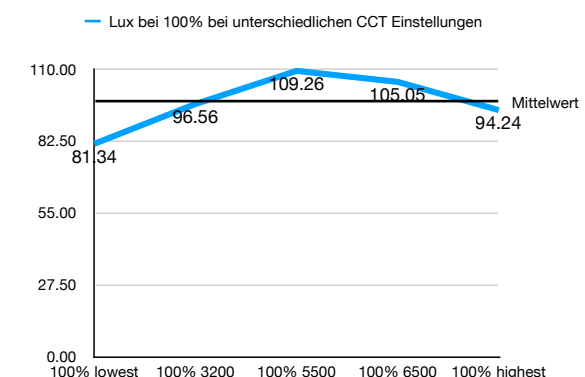
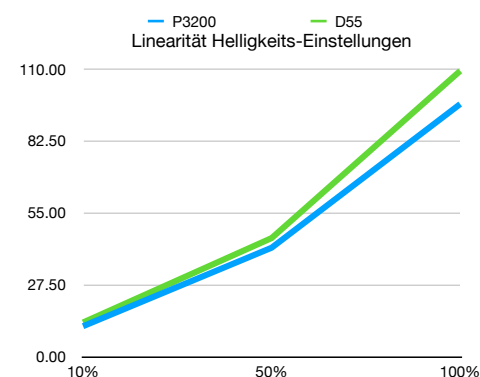
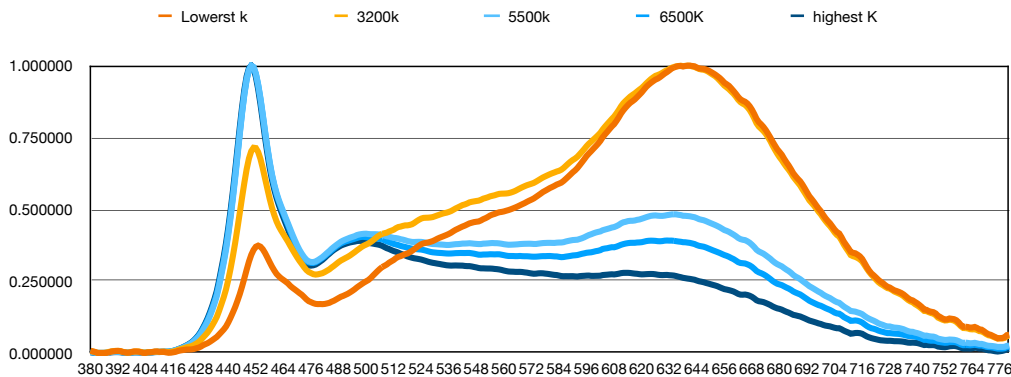
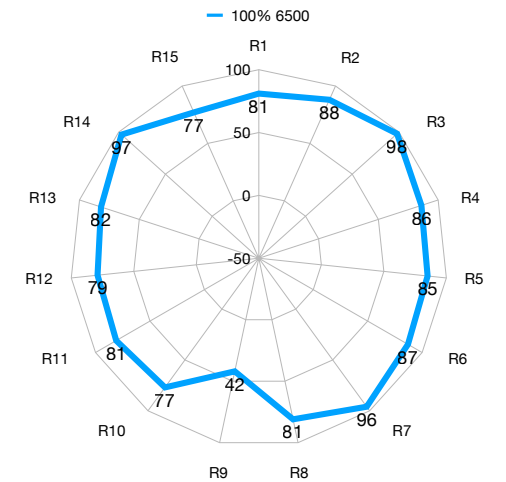
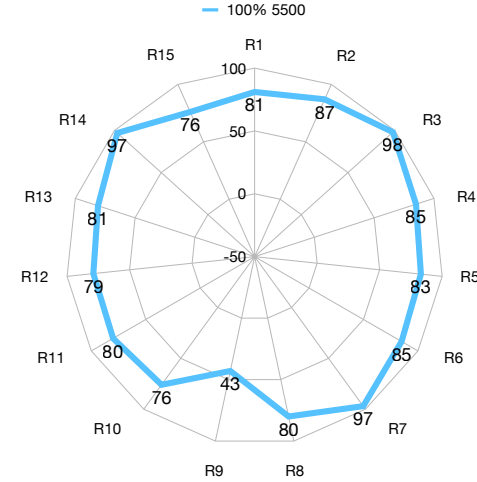
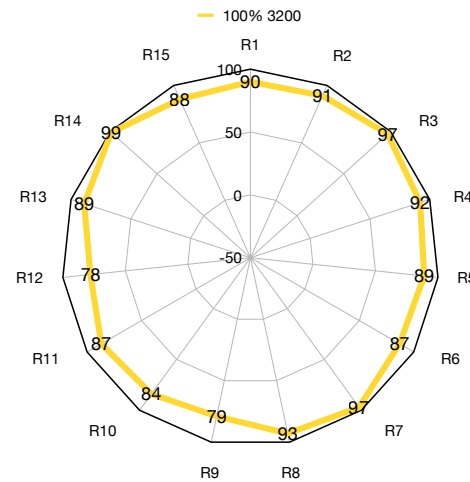
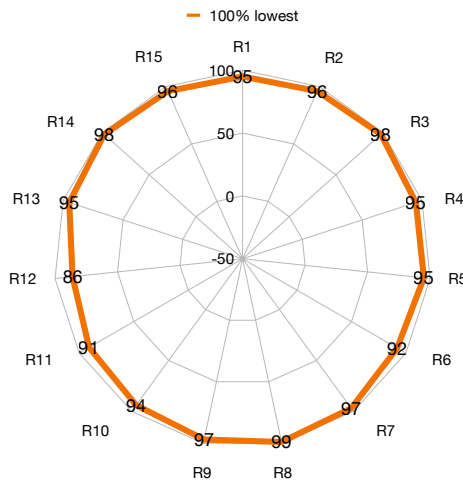


Tabelle 1

Farbtemperatur Eingestellt	Farbtemperatur gemessen	MK-1	Duv	CRI Ra	R9	CRI Re	TM30 R _f	TM30 R _g	SSI	LUX ohne Reflektor 100%	LUX 10% Leistung	LUX mit Reflektor	LUX eigentlicher % Wert bei 10% Leistung	LUX standardabweichung bei verschiedenen CCT
P3200	3028.00	-17.75	-0.0120	91.90	79.00	89.33	94.00	107.00	79.00	96.56	11.49		11.90%	6.47
D55	5510.00	0.33	-0.0139	87.00	43.00	81.87	91.00	107.00	70.00	109.26	12.92	109.26	11.83%	
D65	6566.00	1.55	-0.0116	87.70	42.00	82.47	90.00	105.00		105.05				